



## www.lemo.com

# **SUMMARY**

#### # Wires

Low voltage 8



Image is for illustrative purpose only

Series 1F

**Termination type** Female crimp

IP rating 67

AWG wire size 26.00 - 22.00 Cable Ø 3.80 - 10.70 mm

Status active

Matching parts FGP.1F.308.CLC

#### **Download**

Request a quote

Eplan Catalog

# **TECHNICAL DETAILS**

#### Mechanics

Shell Style/Model PE\*: Straight receptacle, nut fixing (back panel mounting)

**Keying** 3 keys (beta=150, gamma=60, plug: male contacts, receptacle: female contacts)

Housing Material Brass (chrome plated [SAE AMS 2460]) shell and nut, other pieces brass

**Weight** 18.32 g

## **Performance**

Configuration 1F.308: 8 Low Voltage Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current 5 Amps

## **Specifications**

Contact Type: Crimp
Contact Retention: 22 N
Contact Dia.: 0.7 mm (0.028in)
Bucket Dia.: 0.8 mm (0.031in)
Min. Conductor: 0.14 mm^2 (AWG)

Min. Conductor: 0.14 mm<sup>2</sup> (AWG 26) Max. Conductor: 0.34 mm<sup>2</sup> (AWG 22)

R (max): 6.1 mOhm

Vtest (contact-shell): 1300 V (AC), 1840 V (DC) Vtest (contact-contact): 1300 V (AC), 1840 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

#### **Others**

Endurance (Shell): 5000 mating cycles Temp (min / max):  $-55^{\circ}$ C /  $+200^{\circ}$ C


Humidity (max): <=95% [at 60 deg C /140 F]


Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms]

Climatical Category: 50/175/21 (Aluminium shell)

Salt Spray Corrosion: >1000 hr

# **DRAWINGS**

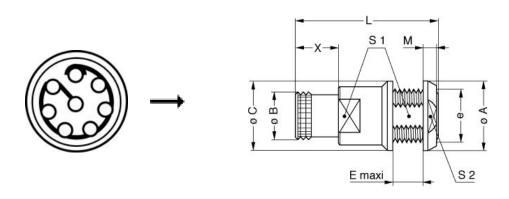



#### **Dimensions**

	A	В	С	Е	L	М	S1	S2	Х	e
mm.	17	10.7	17	6.2	26.7	3.2	11.5	14	8	M13x0.75
in.	0,67	0,42	0,67	0,24	1,05	0,13	0,45	0,55	0,31	

# **RECOMMENDED BY LEMO**

### **Tools**

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 22-24-26/6-5-5

Positionner: DCE.91.070.BVM

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Extractor: DCF.93.070.4LT

Replacement contact: EGG.0B.655.ZZM

## **Cables**

CMN.08.T22.059QGC	TPR	Grey	
CMN.08.T22.059QGZE	TPR (medical)	Grey	>
CMN.08.T26.042QGZE	TPR (medical)	Grey	>
108220	PVC	Black	
108240	PTFE	White	>===
108260	PTFE	White	>====
16080	PVC	Grey	
180240	PVC	Black	-
180260	PVC	Black	
280250	PVC	Grey	<b>&gt;</b>
335990	PVC	Black	3 €
335991	PVC	Black	€
42265	PVC	Yellow	
80140	PVC	Grey	===
8280	PVC	Black	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Standard Circular Connector category:

Click to view products by LEMO manufacturer:

Other Similar products are found below:

5M2530B10P 600259N006 600273N007 6134-336-13149 6134-337-11149 6134-337-2390 6134-341-17149 6280-4SG-516 6280-7SG-3DC 6290 6291A 66200A-10 680-SMG 681-PMG CXS3102A14S2P CXS3102A181S 7271-6SG-300 7282-3PG-300-CH3 75-474014-05S 75-474618-01S 75-474618-04P 75-474618-04S 799539-000 MI8-SE 805-005-07NF11-19PC 805-005-07NF15-7PA 8280-4PG-516 8280-7PG-519 8282-5PG-519 836783-1 MP-4102-25P-C 862256-1 864019-2 866857-1 867865-1 PT01SP-14-18P PT08P-14-5S 120-1833-000 QCM019PC2DC012B 1-2069279-1 121583-0217 121667-0020 129591AU 1000B BULK RD10A16-19-P6CS051/1 RD10A20-31-P8CS051/1 RD16A14-12-S6CS051/2 1301240290 1301240347 1301860202 1301240268