

PHG.0B.511.CLLD32

SUMMARY

Wires

Low voltage



Image is for illustrative purpose only

Series	OB	
Termination type	Female solder	
IP rating	50	
AWG wire size	30.00 - 26.00	
Cable Ø	2.30 - 3.20 mm	
Status	active	

2

Download

Request a quote Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model	PH*: Free receptacle, cable collet
Keying	1 key (alpha=0, plug: male contacts, receptacle: female contacts)
Housing Material	Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces
Weight	9.41 g
Performance	
Configuration	0B.511: 2 High Speed, Low Voltage (1000BASE-T1 (IEEE 802.3bp))
Insulator	L: PEEK (UL 94 / V-0/1.5)
Rated Current	


Others

Endurance (Shell): 5000 Temp (min / max): -55°C / +250°C Humidity (max): <=95% [at 60 deg C /140 F] Vibration: 15 g [10 Hz - 2000 Hz]

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Shock Resistance: 100 g [6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

DRAWINGS

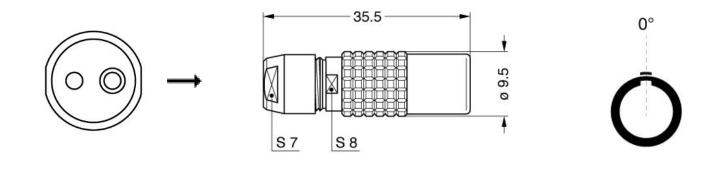

Dimensions

	А	L	S1	S2
mm.	9.5	35.5	8	7
in.	0,37	1,40	0,31	0,28

RECOMMENDED BY LEMO

Tools

Spanner wrench:

DCD.0B.005.PA070

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Push Pull Connectors category:

Click to view products by LEMO manufacturer:

Other Similar products are found below :

6407-249V-11273P 6408-201V-13273 6408-202V-13343 6408-202V-17343 FAG.2B.319.CYC FGA.1B.307.CYCD72Z FLS.01.250.DLAE24 PFG.1B.308.CYZZ PKG.M0.6BL.LZ PLC.M1.0SL.LA GMA.2B.045.DJ GMA.3B.090.DA PRG.M0.6GL.LC52GZ ABF.1S.250.NTA 1332M107MS EAJ.1B.306.CWA 1589430-2 ELF.00.250.NTL ERA.01.250.DLL BRD.0B.200.PCSG HVP.03.250.CLLPV CAH.M34.SLL.C72GZ CAJ.M34.SLL.C72GZ 300500 EXG.0B.309.HLN FFB.1S.250.CLAC27 FLC.00.250.CTAC31 FPG.0B.305.CLAD52 PCS.01.250.DLLE31 PKC.M0.7GL.NG PKG.M0.4TL.LZ PXG.M0.8GG.NG HEG.1B.307.CLNP BRR.3S.200.PZVG JDXEP2T19FSN 400374 DTA.99.700.5Z ECG.00.304.CLL ECP.0S.304.CLN EEG.1B.306.CYZ MS3117-12BU EGA.00.303.CLL SAN.M13.GLA.6G 6408-201V-11343 6408-202V-25273 PAC.M0.4NL.AC52J 980-0009-471 NCG044SC2DC006 13303PM20 FPG.2B.306.CLAD72