

# PHG.1B.304.CLLM31

## SUMMARY

#### # Wires

Low voltage



Image is for illustrative purpose only

Series	1B	
Termination type	Female solder	
IP rating	50	
AWG wire size	30.00 - 22.00	
Cable Ø	2.80 - 3.10 mm	
Status	active	
Matching parts	FGG.1B.304.CLAM31	

4

### Download

Request a quote Catalog

## **TECHNICAL DETAILS**

#### **Mechanics**

Shell Style/Model	PH*: Free receptacle, cable collet	
Keying	1 key (alpha=0, plug: male contacts, receptacle: female contacts)	
Housing Material	Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces	
Weight	21.30 g	
Performance		
Configuration	1B.304 : 4 Low Voltage	
Insulator	L: PEEK (UL 94 / V-0/1.5)	
Rated Current	10 Amps	
Specifications		


Contact Type: Solder Contact Dia.: 0.9 mm (0.035in) Bucket Dia.: 0.8 mm (0.031in) Max. Solid Conductor: 0.34 mm^2 (AWG 22) Max. Stranded Conductor: 0.34 mm^2 (AWG 22) R (max): 4.8 mOhm Vtest (contact-shell): 1450 V (AC), 2050 V (DC) Vtest (contact-contact): 1350 V (AC), 1910 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

### Others

Endurance (Shell): 5000 Temp (min / max): -55°C / +250°C Humidity (max): <=95% [at 60 deg C /140 F] Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

### DRAWINGS

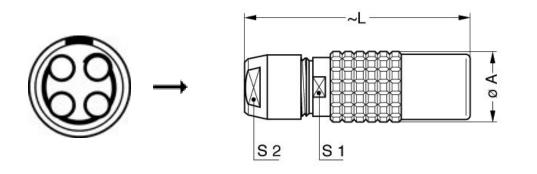



#### Dimensions

	А	L	S1	S2
mm.	12.5	40.5	10	9
in.	0,49	1,59	0,39	0,35

### **RECOMMENDED BY LEMO**

#### Tools

Spanner wrench:

DCD.1B.015.PA090

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

### Cables

CMN.04.T28.031PGCE	PVC	GREY	
CMN.04.T28.031PGZE		Grey	<b>&gt;</b>
CMN.04.T28.031PNCE	PVC	Black	
CMN.04.T28.031PNZE			<b>&gt;</b>
CMN.04.T28.031QGC	TPR	Grey	
4041	PVC	Grey	≥
4050	PVC	Black	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Push Pull Connectors category:

Click to view products by LEMO manufacturer:

Other Similar products are found below :

6407-249V-11273P 6408-201V-13273 6408-202V-13343 6408-202V-17343 EZG.0B.309.CLN FFA.2S.310.ZLA FGA.1B.307.CYCD72Z FGJ.1B.304.CLLD76 FGJ.1B.306.CWLD72 FGJ.3B.304.CYMD10Z FGJ.3B.304.CYMD82Z PCS.01.250.DLLE24 PHG.0K.305.CYMC40Z PHG.1K.308.CLLK85 PKG.M0.6BL.LZ PLC.M1.0SL.LA GMA.10.290.DN GMA.3B.090.DA PRG.M0.6GL.LC52GZ PSA.1S.275.CTLC66 ABF.1S.250.NTA 133020F 1331ER193MZ 1332M107MZ DTS26Z19-32JA-LC DTS26Z19-32SA DTS26Z19-32SA-LC DTS26Z23-55HA DTS26Z23-55HA-LC DTS26Z23-55JA-LC EAJ.1B.306.CWA ECG.XB.312.CLL 1589430-2 EEA.0B.305.CLN EEA.0B.309.CLL ELF.00.250.NTL ERA.01.250.DLL BRR.2S.200.PZVG HR10A-P CAH.M34.SLL.C72GZ CAJ.M34.SLL.C72GZ 300500 ESB.00.303.NLL EXG.0B.309.HLN FFB.1S.250.CLAC27 FGA.2B.306.CYCD92 FGA.2B.306.CYCD92Z FGA.XB.312.CLAD72 FGJ.1B.302.CYMD62 FGJ.3B.308.CLLD72Z