

PHP.0F.303.XLM

SUMMARY

Wires

Low voltage

	000	
11		
		-
#		
	182	

Image is for illustrative purpose only

Series	0F
Termination type	Female crimp
IP rating	67
AWG wire size	24.00 - 20.00
Cable Ø	3.80 - 9.00 mm
Status	active
Matching parts	FGP.0F.303.XLC

3

<u>Request a quote</u> Catalo<u>g</u>

Download

TECHNICAL DETAILS

Mechanics

Shell Style/M	Nodel	PH*: Straight receptacle
Keying		3 keys (beta=150, gamma=60, plug: male contacts, receptacle: female contacts)
Housing Mate	erial	Aluminium (nickel plated [SAE AMS QQ N 290], anthracite color) shell and nut, other pieces bronze/brass
Weight		5.34 g
Performance	•	
Configuratio	n	0F.303 : 3 Low Voltage
Insulator		L: PEEK (UL 94 / V-0/1.5)
Rated Currer	nt	8 Amps

Specifications


Contact Type: Crimp Contact Retention: 30 N Contact Dia.: 0.9 mm (0.035in) Bucket Dia.: 1.1 mm (0.043in) Min. Conductor: 0.25 mm^2 (AWG 24) Max. Conductor: 0.5 mm^2 (AWG 20) R (max): 4.8 mOhm Vtest (contact-shell): 1600 V (AC), 2300 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Others

Endurance (Shell): 1000 mating cycles Temp (min / max): -15°C / +200°C Humidity (max): <=95% [at 60 deg C /140 F] Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [6 ms] Climatical Category: 15/200/21 (Aluminium shell) Salt Spray Corrosion: max. 48 hr

DRAWINGS

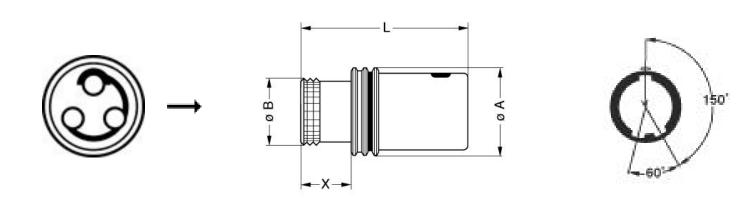

Dimensions

	А	В	L	Х
mm.	12	9	26.7	8
in.	0,47	0,35	1,05	0,31

RECOMMENDED BY LEMO

Tools

Crimp Tool:

DPC.91.701.V

Crimp settings:

AWG/Selector = 20-22-24/6-5-5

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Positionner:	DCE.91.070.BVM		
Extractor:	DCF.93.090.4LT		
Replacement contact:	EGG.0B.660.ZZM		

Cables

CMN.03.T20.049PGZE		Grey	
CMN.03.T20.049PNZE			
130240	PVC	Black	
130250	PVC	Grey	
230500	PVC	Grey	
230750	PVC	Grey	-
30110	PVC	Grey	
30260	PVC	Black	
3220	PVC	Black	
3280	PVC	Black	
60080	PVC	Grey	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Push Pull Connectors category:

Click to view products by LEMO manufacturer:

Other Similar products are found below :

6407-249V-11273P 6408-201V-13273 6408-202V-13343 6408-202V-17343 EZG.0B.309.CLN FFA.2S.310.ZLA FGA.1B.307.CYCD72Z FGJ.1B.304.CLLD76 FGJ.1B.306.CWLD72 FGJ.3B.304.CYMD10Z FGJ.3B.304.CYMD82Z PCS.01.250.DLLE24 PHG.0K.305.CYMC40Z PHG.1K.308.CLLK85 PKG.M0.6BL.LZ PLC.M1.0SL.LA GMA.10.290.DN GMA.3B.090.DA PRG.M0.6GL.LC52GZ PSA.1S.275.CTLC66 ABF.1S.250.NTA 133020F 1331ER193MZ 1332M107MZ DTS26Z19-32JA-LC DTS26Z19-32SA DTS26Z19-32SA-LC DTS26Z23-55HA DTS26Z23-55HA-LC DTS26Z23-55JA-LC EAJ.1B.306.CWA ECG.XB.312.CLL 1589430-2 EEA.0B.305.CLN EEA.0B.309.CLL ELF.00.250.NTL ERA.01.250.DLL BRR.2S.200.PZVG HR10A-P CAH.M34.SLL.C72GZ CAJ.M34.SLL.C72GZ 300500 ESB.00.303.NLL EXG.0B.309.HLN FFB.1S.250.CLAC27 FGA.2B.306.CYCD92 FGA.2B.306.CYCD92Z FGA.XB.312.CLAD72 FGJ.1B.302.CYMD62 FGJ.3B.308.CLLD72Z