



LEOPARD IMAGING INC

Rev. 1.1

LI-USB30-IMX274


Data Sheet

Key Features

- USB 3.0 Super Speed support
- RAW data output without compression
- UVC compliance
- Color camera
- Support M12 / CS lens
- Provide customization services
- USB +5VDC powered device
- Part#: **LI-USB30-IMX274**

Default Lens Specification


- Model: SYD1201A
- Focal length: 3.7 mm
- Aperture, F/#: 2.8 +/- 5%
- Built in 650nm IR cut filter
- FOV (D/H/V): 92 ° / 83 ° / 53 °
- TV Distortion: -1.0 %
- Mount: M12 x P0.5

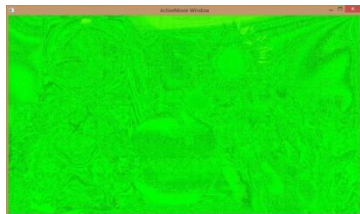

RAW data streaming



Camera Tool view mode

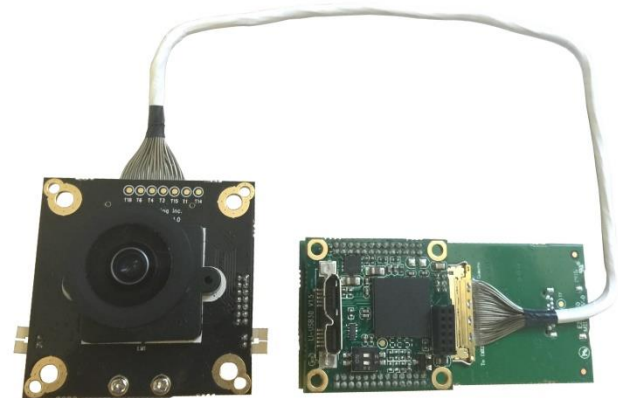

BOM

#	Items	QTY
1	LI-IMX274-MIPI	1
2	LI-USB30 Main board	1
3	MIPI adapter board	1
4	FAW-1233-02 (200mm)	1

Applications

- Machine Vision
- Medical Camera
- Scientific Camera

SDK Supported

- Camera Tool Source Code in C#
- Capture & Display
- OpenCV supported through Emgu
- RAW to RGB Conversion
- Save file as BMP & RAW format
- Color Matrix



Leopard Imaging Inc.

1130 Cadillac Ct., Milpitas, CA 95035, USA
Phone: +1-408-263-0988
Fax: +1-408-217-1960
Email: sales@leopardimaging.com
Website: www.leopardimaging.com

Specification

General Behavior		
Video Resolution @ Frame rate	1920 x 1080 @ 30 fps	
Dynamic range	TBD	
Interface (Optical)		
IR cut filter (on lens)	Yes, 650nm IR cut filter	
Sensor specification	Sony Diagonal 7.20 mm (Type 1/2.5) CMOS Image Sensor IMX274	
Shutter	Rolling	
Color/Mono	Color	
Format	1/2.5"	
Total number of pixels	H: 3864, V:2218	
Pixel size	H:1.62 um, V: 1.62 um	
Lens mount	CS / M12 lens mount support (Default: M12 lens)	
Interface (Electrical)		
Interface	USB 3.0	
Supply voltage	USB 3.0 +5 VDC power source	
Current consumption	Approx. 223 mA at 5 VDC	
Interface (Mechanical)		
Dimensions	LI-IMX274-MIPI	L: 38 mm, W: 38 mm
	USB 3.0 MIPI Tester	L: 56 mm, W: 26 mm
Mass	32 g	
Adjustment (Manual)		
Shutter	TBD	
Gain	TBD	
Adjustment (Auto)		
Shutter	TBD	
Environmental		
Max. temperature (operation)	0 °C ~ 50 °C (32 °F~ 122 °F)	
Max. temperature (storage)	-20 °C ~ 80 °C (-4 °F~176 °F)	
Max. humidity (operation)	20 % ~ 80 %, relative, non-condensing	
Max. humidity (storage)	20 % ~ 80 %, relative, non-condensing	



Leopard Imaging Inc.

1130 Cadillac Ct., Milpitas, CA 95035, USA
Phone: +1-408-263-0988
Fax: +1-408-217-1960
Email: sales@leopardimaging.com
Website: www.leopardimaging.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cameras & Camera Modules](#) category:

Click to view products by [Leopard Imaging](#) manufacturer:

Other Similar products are found below :

[FH-SC](#) [CAMOV5645](#) [73-540-420I](#) [Web Camera module 5.0M pixel](#) [LI-IMX424-GMSL2-070H](#) [73-951-0046](#) [73-954-0001T](#) [73-961-0005](#)
[1202](#) [1203](#) [73-961-0003](#) [73-961-0012](#) [107139](#) [106983](#) [107115](#) [107149](#) [107142](#) [82535IVCHVM](#) [107140](#) [107113](#) [107112](#) [107141](#) [107147](#)
[107148](#) [107110](#) [107150](#) [107145](#) [107111](#) [OKY3553](#) [10299](#) [10300](#) [11388](#) [613](#) [EP-DCINTELD-415](#) [1386](#) [4321](#) [4561](#) [43203](#) [104002](#)
[105716](#) [105993](#) [107206](#) [107645](#) [107646](#) [107655](#) [108010](#) [108172](#) [108173](#) [CLEO-CAM1](#) [107114](#)