


Bridge rectifiers

Feature

- . Plastic Package has Underwriters Laboratory Flammability Classification 94V-0
- . This series is UL listed under the Recognized Component index, file number E231047
- . Single-in-line package
- . High current capacity with small package
- . Superior thermal conductivity
- . High temperature soldering guaranteed:
260 /10 seconds
- . High I_{FSM}
- . We declare that the material of product compliance with RoHS requirements.

GBU8 Series

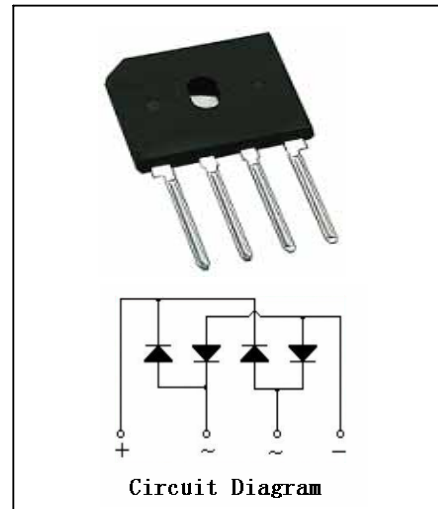

Product Characteristic

Item	Symbol	GBU8A	GBU8B	GBU8D	GBU8G	GBU8J	GBU8K	GBU8M	Unit
Maximum repetitive voltage	V_{RM}	50	100	200	400	600	800	1000	V
Maximum DC reverse current $T_A=25$ at rated DC blocking voltage $T_A=125$	I_R	5 500							μA
Average rectified forward current 60Hz sine wave, R-load with heatsink $T_c=100$ ⁽¹⁾⁽²⁾	I_o	8							A
Peak forward surge current 10.0 ms single half sine-wave superimposed on rated load	I_{FSM}	200							A
Dielectric strength Terminals to case, AC 1 minute Current 1mA	V_{dia}	2.5							KV
Typical thermal resistance per leg ⁽³⁾	$R_{\theta JA}$	21 ⁽²⁾							/W
	$R_{\theta JC}$	2.2 ⁽¹⁾							
Maximum instantaneous forward voltage at 4A	V_F	1.0							V
Operating junction temperature	T_j	150							
Storage temperature	T_{stg}	-55~150							

Notes : (1)Unit case mounted on Al plate heat-sink

(2) Unites mounted on P.C.B. without heat-sink

(3)Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw{heat-sink size:8.2*8.2*03cm}

Characteristic Curves

Fig. 1 Derating Curves

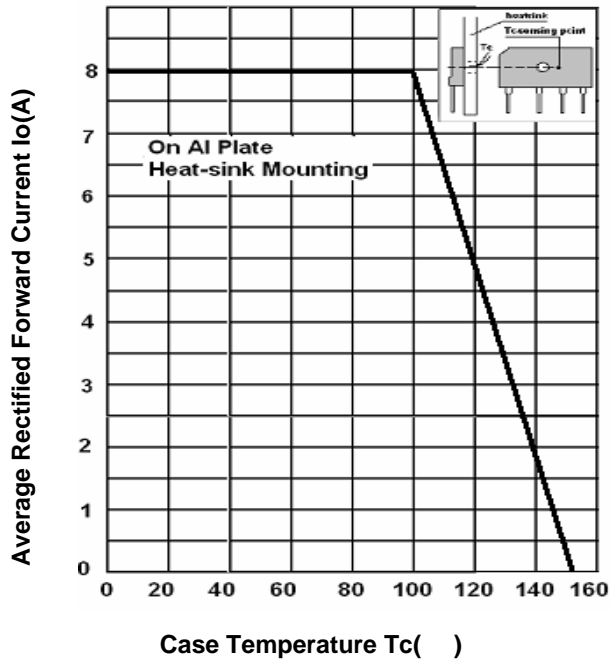


Fig.2 Typical Reverse Characteristics

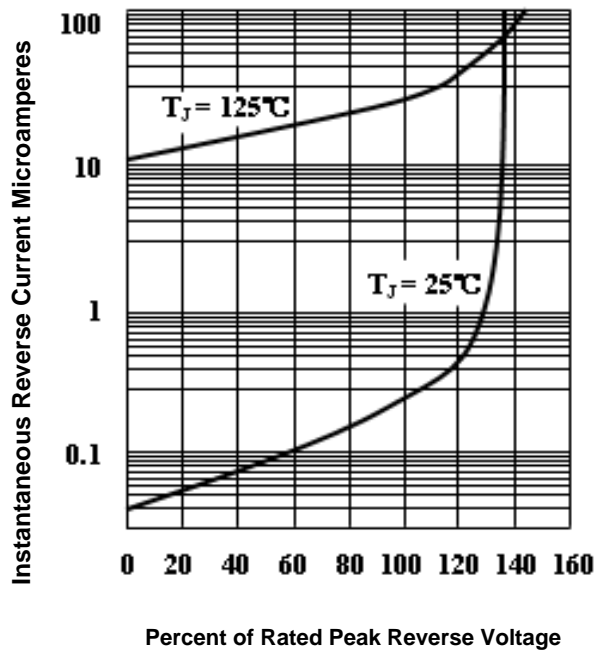


Fig.3 Peak Surge Forward capability



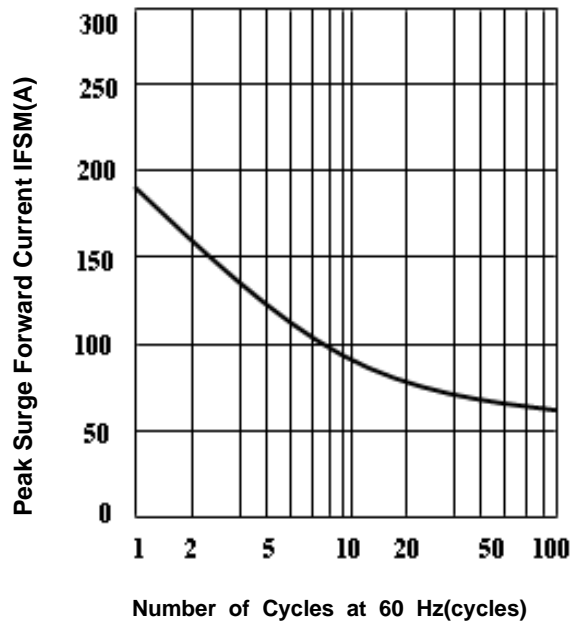


Fig.4 Forward Voltage

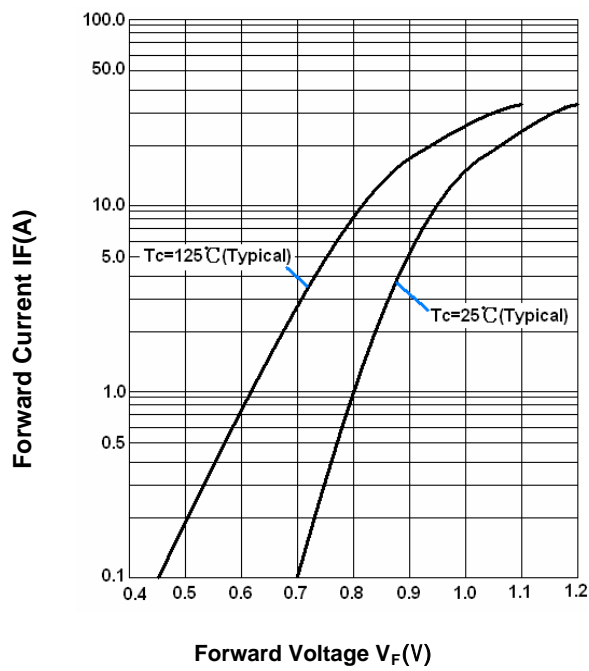

SHAPE AND DIMENSIONS

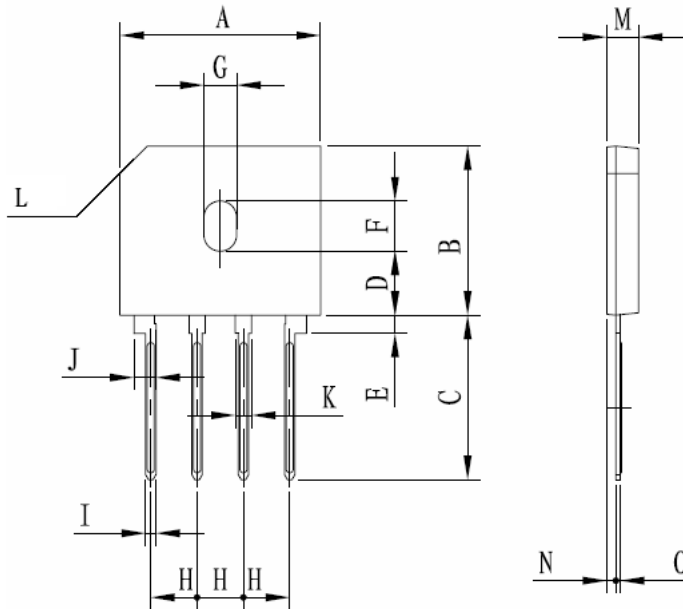

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.854	0.878	21.70	22.30
B	0.717	0.740	18.20	18.80
C	0.689	0.728	17.50	18.50
D	0.268	0.283	6.80	7.20
E	0.071	0.087	1.80	2.20
F	0.213	0.220	5.40	5.60
G	0.138	0.146	3.50	3.70
H	0.192	0.208	4.88	5.28
I	0.031	0.047	0.80	1.20
J	0.09	0.10	2.21	2.61
K	0.062	0.078	1.58	1.98
L	0.118*45°		3*45°	
M	0.130	0.146	3.30	3.70
N	0.031	0.047	0.80	1.20
O	0.012	0.028	0.30	0.70

- NOTES: 1. DIMENSIONING AND TOLERANCING PER ANSII Y14.5M, 1982.
2. CONTROLLING DIMENSION: mm.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Leshan](#) manufacturer:

Other Similar products are found below :

[G3SBA60-E351](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF10SA-E345](#) [RMB2S](#) [RCG](#) [APT30DF100HJ](#) [APT60DF20HJ](#) [B2S-E3/80](#) [BU1506-E351](#) [BU15085S-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [RS404GL-BP](#) [RS405GL-BP](#) [G3SBA20-E3/51](#) [G5SBA20-E3/51](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBL02-E351](#) [GBL10-E3/45](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU4K-BP](#) [GBU8B-E3/45](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [MB1510](#) [MB352W](#) [MB6M-G](#) [B2M-E345](#) [B40C7000A](#) [B500C7000A](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BU1006-E345](#) [BU12065S-E3/45](#) [BU1508-E3/51](#) [BU2006-E3/45](#) [BU2008-E345](#)