

High –Speed Switching Diode


IN4148WS

FETURE

- We declare that the material of product compliance with RoHS requirements.

ORDERING INFORMATION

| Device | Package | Shipping |
|----------|---------|----------------|
| IN4148WS | SOD-323 | 3000/Tape&Reel |

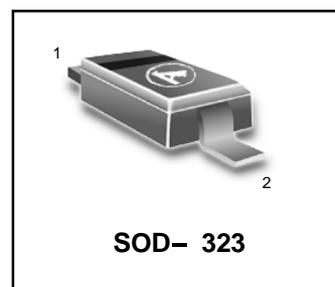

MAXIMUM RATINGS

| Rating | Symbol | Value | Unit |
|----------------------------|-----------------|-------|------|
| Reverse Voltage | V_R | 100 | Vdc |
| Forward Current | I_F | 200 | mAdc |
| Peak Forward Surge Current | $I_{FM(surge)}$ | 500 | mAdc |



THERMAL CHARACTERISTICS

| Characteristic | Symbol | Max | Unit |
|---|-----------------|------|---------------------------|
| Total Device Dissipation FR-5 Board,* $T_A = 25^\circ\text{C}$ | P_D | 200 | mW |
| Derate above 25°C | | 1.57 | mW/ $^\circ\text{C}$ |
| Thermal Resistance Junction to Ambient | $R_{\theta JA}$ | 635 | $^\circ\text{C}/\text{W}$ |
| Junction and Storage Temperature | T_J, T_{stg} | 150 | $^\circ\text{C}$ |

**FR-4 Minimum Pad

DEVICE MARKING

IN4148WS = 5D


ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Max | Unit |
|----------------|--------|-----|-----|------|
|----------------|--------|-----|-----|------|

OFF CHARACTERISTICS

| | | | | |
|---|------------|-----|-----------|-------------------------|
| Reverse Breakdown Voltage ($I_R = 100 \mu\text{Adc}$) | $V_{(BR)}$ | 100 | — | Vdc |
| Reverse Voltage Leakage Current ($V_R = 20\text{Vdc}$) ($V_R = 75\text{Vdc}$) | I_R | — | 25 5.0 | nAdc μAdc |
| Diode Voltage ($V_R = 0, f = 1.0\text{MHz}$) | C_T | — | 4.0 | pF |
| Forward Voltage ($I_F = 10 \text{mAdc}$) | V_F | — | 1.0 | Vdc |
| Reverse Recovery Time ($I_F = I_R = 10 \text{mAdc}$) (Figure 1) | t_{rr} | — | 4.0 | ns |

IN4148WS

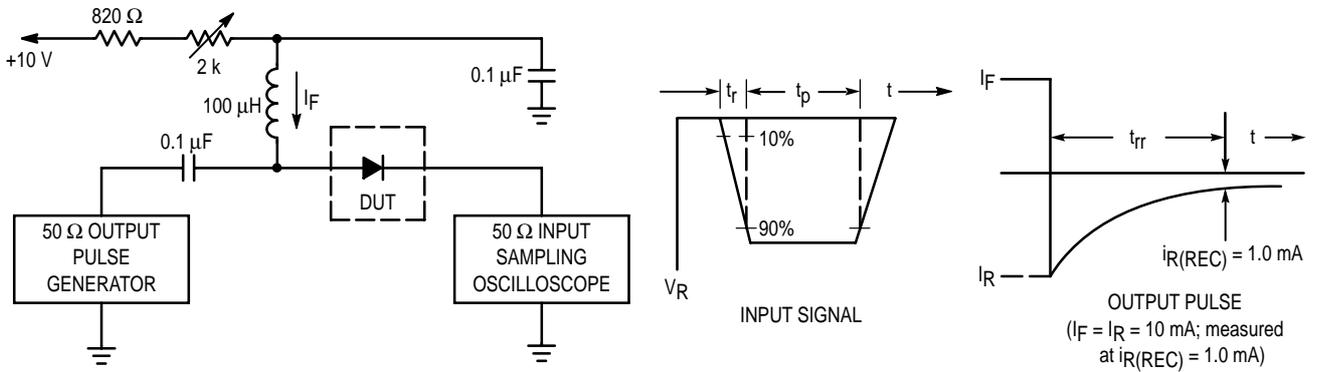

- Notes: 1. A 2.0 kΩ variable resistor adjusted for a Forward Current (I_F) of 10mA.
 2. Input pulse is adjusted so $I_{R(\text{peak})}$ is equal to 10mA.
 3. $t_p \gg t_{rr}$

Figure 1. Recovery Time Equivalent Test Circuit

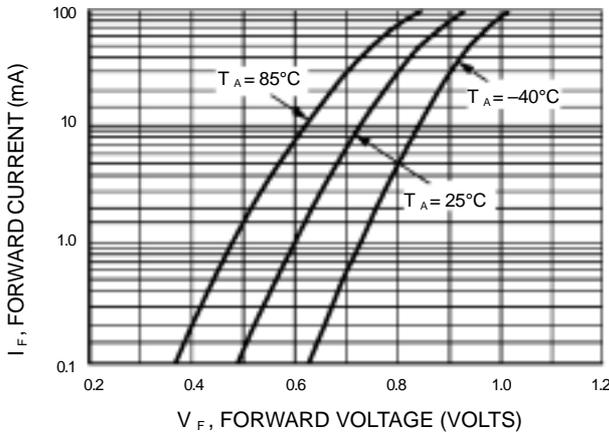


Figure 2. Forward Voltage

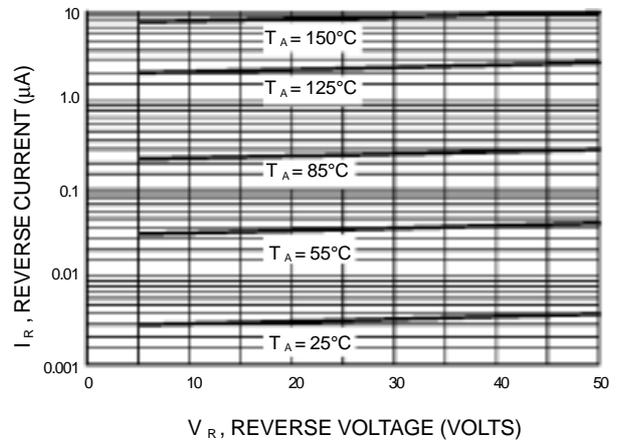


Figure 3. Leakage Current

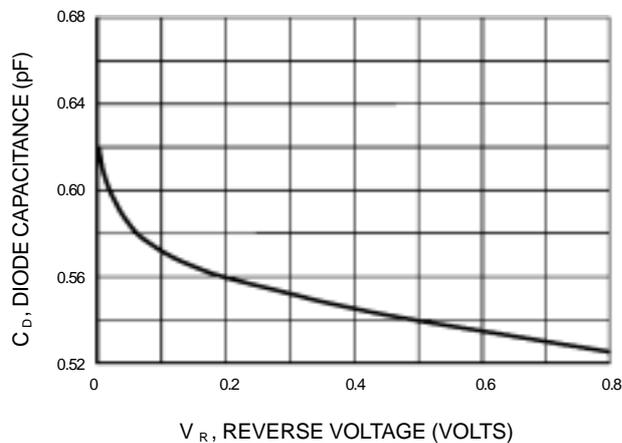
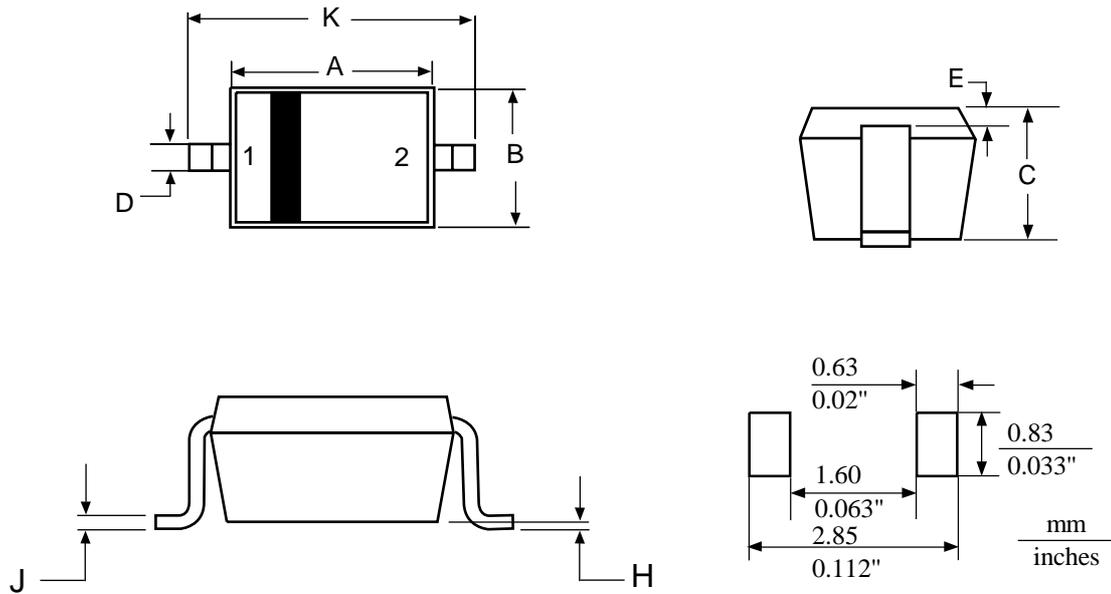


Figure 4. Capacitance

IN4148WS
SOD-323

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|--------|
| | MIN | MAX | MIN | MAX |
| A | 1.60 | 1.80 | 0.063 | 0.071 |
| B | 1.15 | 1.35 | 0.045 | 0.053 |
| C | 0.80 | 1.00 | 0.031 | 0.039 |
| D | 0.25 | 0.40 | 0.010 | 0.016 |
| E | 0.15 REF | | 0.006 REF | |
| H | 0.00 | 0.10 | 0.000 | 0.004 |
| J | 0.089 | 0.177 | 0.0035 | 0.0070 |
| K | 2.30 | 2.70 | 0.091 | 0.106 |

PIN:1:CATHODE
2:ANODE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [Leshan manufacturer:](#)

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [RD0506LS-SB-1H](#) [RGP30G-E373](#) [DSE010-TR-E](#) [BAQ333-TR](#) [BAQ335-TR](#) [BAQ33-GS18](#) [BAS1602VH6327XT](#) [BAV17-TR](#) [BAV19-TR](#) [BAV301-TR](#) [BAW27-TAP](#) [HSC285TRF-E](#) [NSVBAV23CLT1G](#) [NTE525](#) [1SS181-TP](#) [1SS184-TP](#) [1SS193,LF](#) [1SS193-TP](#) [1SS400CST2RA](#) [SBAV99LT3G](#) [SDAA13](#) [LL4448-GS18](#) [SHN2D02FUTW1T1G](#) [LS4150GS18](#) [LS4151GS08](#) [SMMD7000LT3G](#) [FC903-TR-E](#) [1N4449](#) [1N4934-E3/73](#) [1SS226-TP](#) [APT100DL60HJ](#) [RFUH20TB3S](#) [RGP30G-E354](#) [RGP30M-E3/73](#) [D291S45T](#) [MCL4151-TR](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAS33-TAP](#) [BAS 70-02V H6327](#) [BAV300-TR](#) [BAV303-TR3](#) [BAW27-TR](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#)