
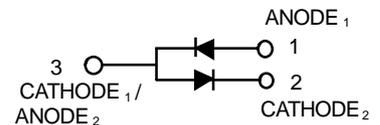


# Ultra High Speed Switching Application

## Features

- Low forward voltage :  $V_{F(3)} = 0.9V$  (typ.)
- Fast reverse recovery time :  $t_r = 1.6ns$  (typ.)
- Small total capacitance :  $C_T = 0.9pF$  (typ.)
- We declare that the material of product compliance with RoHS requirements.

## L1SS226LT1G

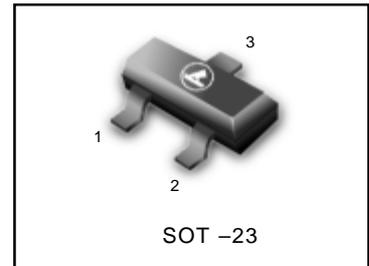

## Maximum Ratings (T<sub>A</sub> = 25°C)

Characteristic	Symbol	Rating	Unit
Maximum (peak) reverse voltage	V <sub>RM</sub>	85	V
Reverse voltage	V <sub>R</sub>	80	V
Maximum (peak) forward current	I <sub>FM</sub>	300 *	mA
Average forward current	I <sub>O</sub>	100 *	mA
Surge current (10ms)	I <sub>FSM</sub>	2 *	A
Power dissipation	P	150	mW
Junction temperature	T <sub>J</sub>	125	°C
Storage temperature range	T <sub>stg</sub>	-55~+125	°C

\* : Unit rating. Total rating = Unit rating × 0.7.

## Electrical Characteristics (T<sub>A</sub> = 25°C)

Characteristic	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Forward voltage	V <sub>F(1)</sub>	—	I <sub>F</sub> = 1mA	—	0.60	—	V
	V <sub>F(2)</sub>	—	I <sub>F</sub> = 10mA	—	0.72	—	
	V <sub>F(3)</sub>	—	I <sub>F</sub> = 100mA	—	0.90	1.20	
Reverse current	I <sub>R(1)</sub>	—	V <sub>R</sub> = 30V	—	—	0.1	μA
	I <sub>R(2)</sub>	—	V <sub>R</sub> = 80V	—	—	0.5	
Total capacitance	C <sub>T</sub>	—	V <sub>R</sub> = 0, f = 1MHz	—	0.9	3.0	pF
Reverse recovery time	t <sub>r</sub>	—	I <sub>F</sub> = 10mA (Fig.1)	—	1.6	4.0	ns

## Ordering Information

Device	Marking	Shipping
L1SS226LT1G	C3	3000/Tape&Reel
L1SS226LT3G	C3	10000/Tape&Reel

**L1SS226LT1G**

**Electrical characteristic curves**

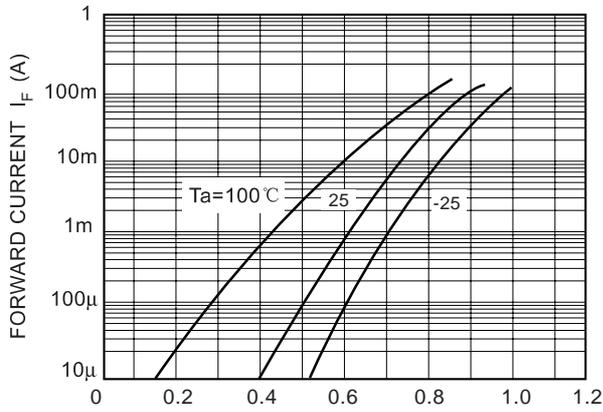


Fig.1 FORWARD VOLTAGE  $V_F$ (V)

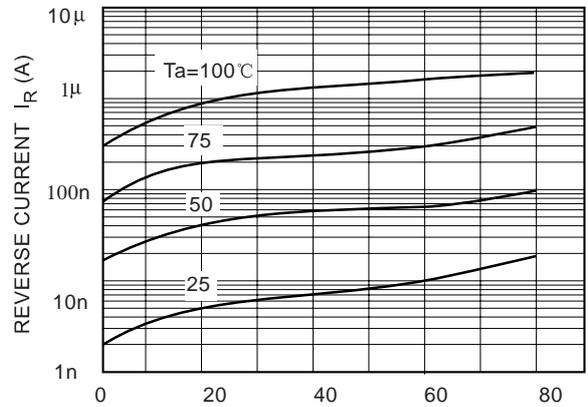


Fig.2 REVERSE VOLTAGE  $V_R$ (V)

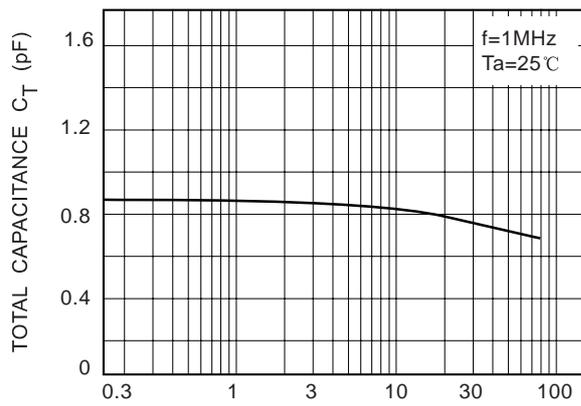


Fig.3 REVERSE VOLTAGE  $V_R$ (V)

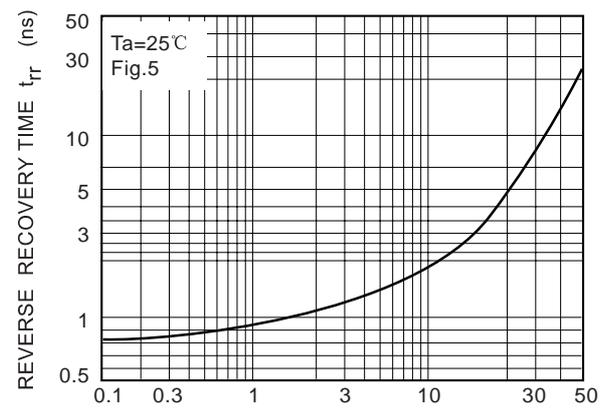


Fig.4 FORWARD CURRENT  $I_F$ (mA)

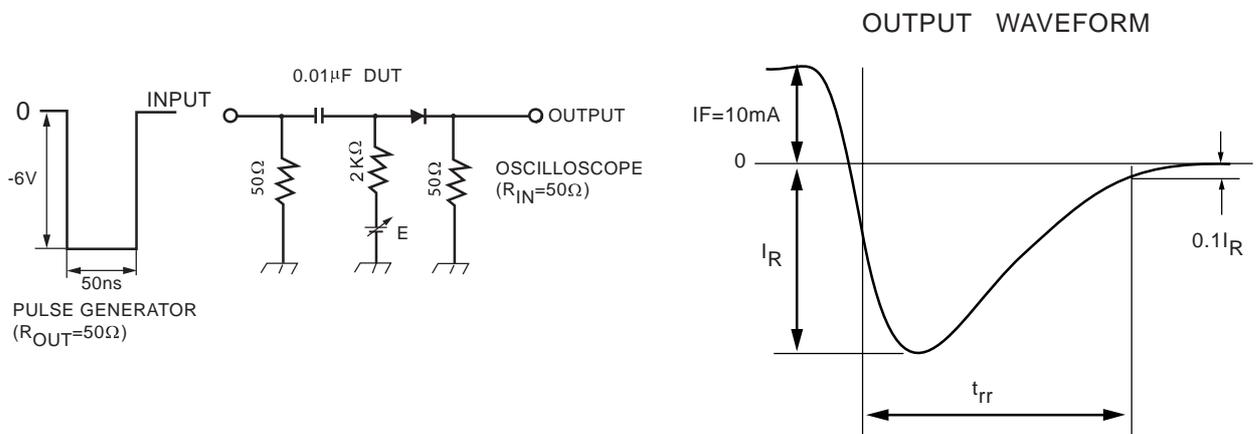



Fig.5 Reverse recovery time ( $t_{rr}$ ) test circuit

**L1SS226LT1G**


**SOT-23**

**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M,1982
2. CONTROLLING DIMENSION: INCH.

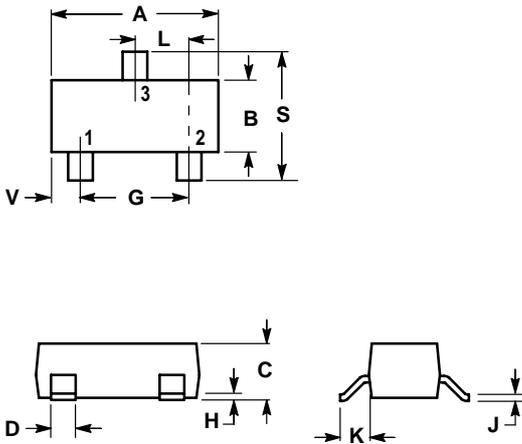

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.1102	0.1197	2.80	3.04
B	0.0472	0.0551	1.20	1.40
C	0.0350	0.0440	0.89	1.11
D	0.0150	0.0200	0.37	0.50
G	0.0701	0.0807	1.78	2.04
H	0.0005	0.0040	0.013	0.100
J	0.0034	0.0070	0.085	0.177
K	0.0140	0.0285	0.35	0.69
L	0.0350	0.0401	0.89	1.02
S	0.0830	0.1039	2.10	2.64
V	0.0177	0.0236	0.45	0.60

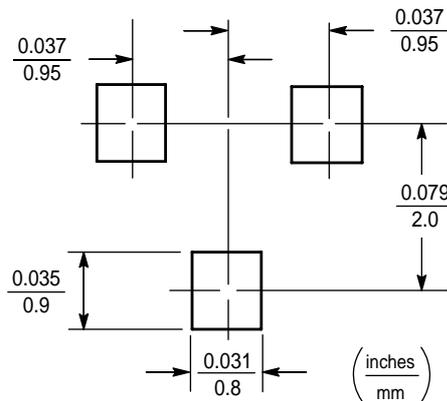

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Diodes - General Purpose, Power, Switching category:](#)

*Click to view products by* [Leshan manufacturer:](#)

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [DSE010-TR-E](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#)  
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [FC903-TR-E](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#)  
[1SS226-TP](#) [RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-](#)  
[GS18](#) [053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV199E6433HTMA1](#)  
[BAS28-7](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#)  
[NTE6250](#) [NTE582-4](#) [NTE582-6](#)