

# LESD8D12T5G ESD PROTECTION DIODE

## Description

The LESD8D12T5G is designed to protect voltage sensitive components from ESD. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD. Because of its small size, it is suited for use in cellular phones, MP3 players, digital cameras and many other portable applications where board space is at a premium.

## Applications

- | Cellular phones audio
- | MP3 players
- | Digital cameras
- | Portable applications
- | mobile telephone

## Features

- | Small Body Outline Dimensions:  
0.039" x 0.024"(1.0 mm x 0.60 mm)
- | Low Body Height: 0.020" (0.50 mm) Max
- | Stand-off Voltage: 3.3 V – 12 V
- | Low Leakage
- | Response Time is Typically < 1 ns
- | ESD Rating of Class 3 (> 16 kV) per Human Body Model
- | IEC61000-4-2 Level 4 ESD Protection
- | We declare that the material of product compliance with RoHS requirements.
- | S- Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.



## MAXIMUM RATINGS

| Rating   | Symbol                           | Value      | Unit     |
|--|----------------------------------|------------|----------|
| IEC 61000-4-2 (ESD) Air Contact<br>Contact discharge                     |                                  | ±15<br>±8  | kV<br>kV |
| ESD Voltage Per Human Body Model   |                                  | 16         | kV       |
| Total Power Dissipation on FR-5 Board (Note 1)<br>@ T <sub>A</sub> =25°C | PD                               | 150        | Mw       |
| Junction and Storage Temperature Range                                   | T <sub>J</sub> ,T <sub>STG</sub> | -55 to 150 | °C       |
| Lead Solder Temperature – Maximum (10<br>Second Duration)                | TL                               | 260        | °C       |

Stresses exceeding Maximum Ratings may damage the device. Maximum Rating are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. FR-5 = 1.0\*0.75\*0.62 in.

**LESD8D12T5G  
S-LESD8D12T5G**

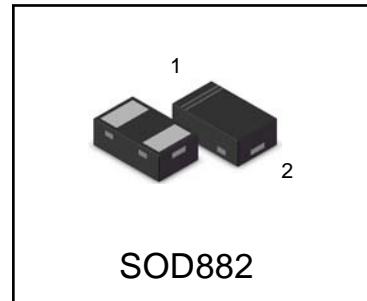

## Ordering information


| Device                       | Marking | Shipping        |
|------------------------------|---------|-----------------|
| LESD8D12T1G<br>S-LESD8D12T1G | H       | 5000/Tape&Reel  |
| LESD8D12T3G<br>S-LESD8D12T3G | H       | 8000/Tape&Reel  |
| LESD8D12T5G<br>S-LESD8D12T5G | H       | 10000/Tape&Reel |

# LESD8D12T5G , S-LESD8D12T5G

## ELECTRICAL CHARACTERISTICS

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

| Symbol    | Parameter  |
|-----------|--|
| $I_{PP}$  | Maximum Reverse Peak Pulse Current                   |
| $V_C$     | Clamping Voltage @ $I_{PP}$                          |
| $V_{RWM}$ | Working Peak Reverse Voltage                         |
| $I_R$     | Maximum Reverse Leakage Current @ $V_{RWM}$          |
| $V_{BR}$  | Breakdown Voltage @ $I_T$                            |
| $I_T$     | Test Current   |
| $I_F$     | Forward Current                                      |
| $V_F$     | Forward Voltage @ $I_F$                              |
| $P_{PK}$  | Peak Power Dissipation                               |
| C         | Max. Capacitance @ $V_R = 0$ and $f = 1 \text{ MHz}$ |

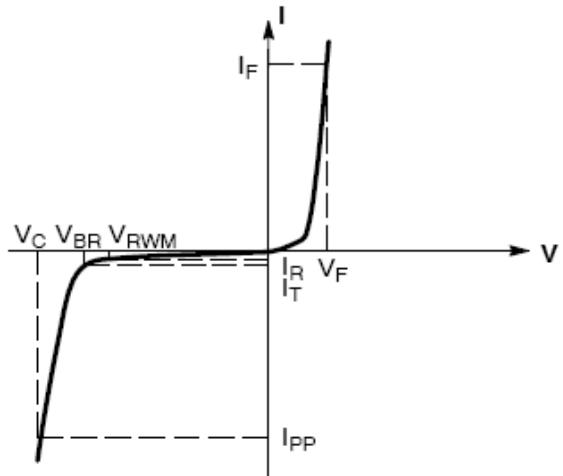

**Uni-Directional TVS**

## ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ\text{C}$ unless otherwise noted, $V_F=0.9\text{V}$ Max. @ $IF=10\text{mA}$ for all types)

| Device       | $V_{RWM}$<br>(V) | $I_R$<br>( $\mu\text{A}$ )<br>@<br>$V_{RWM}$ | $V_{BR}$<br>(V)<br>@ $I_T$<br>(Note 2) | $I_T$<br>(mA) | $I_{PP}$<br>(A)<br>(Note 3) | $V_C$<br>(V)<br>@ Max $I_{PP}$<br>(Note 3) | $P_{PK}$<br>(W)<br>(8*20 $\mu\text{s}$ ) | C<br>(pF) |
|--------------|------------------|--|--|---------------|-----------------------------|--|--|-----------|
|              | Max              | Max  | Min                                    |               | Max                         | Max  | Typ                                      | Typ       |
| LESD8D3.3T5G | 3.3              | 2.5  | 5.0                                    | 1.0           | 9.8                         | 10.4                                       | 102                                      | 80        |
| LESD8D5.0T5G | 5.0              | 1.0  | 6.2                                    | 1.0           | 8.7                         | 12.3                                       | 107                                      | 65        |
| LESD8D12T5G  | 12               | 1.0  | 13.3                                   | 1.0           | 5.9                         | 23.7                                       | 140                                      | 30        |


Other voltage available upon request.

2.  $V_{BR}$  is measured with a pulse test current  $I_T$  at an ambient temperature of  $25^\circ\text{C}$


3. Surge current waveform per Figure 3.

# LESD8D12T5G , S-LESD8D12T5G


## TYPICAL CHARACTERISTICS

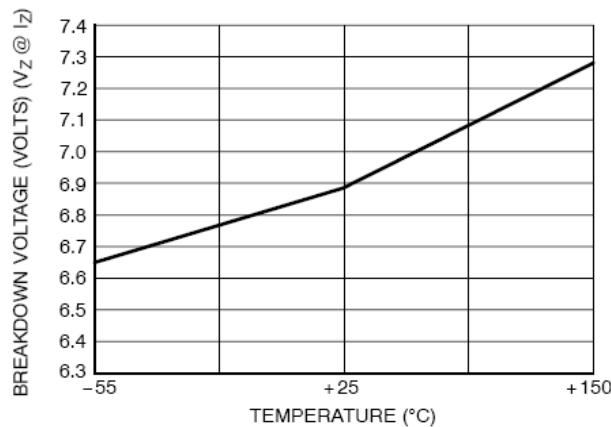


**Figure 1. Typical Breakdown Voltage versus Temperature**

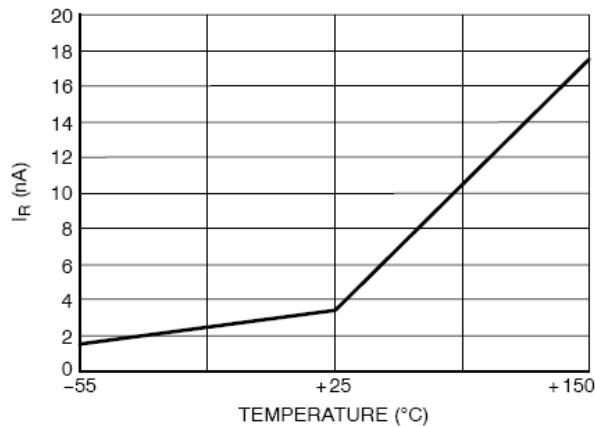


**Fig 2. Typical Leakage Current versus Temperature**

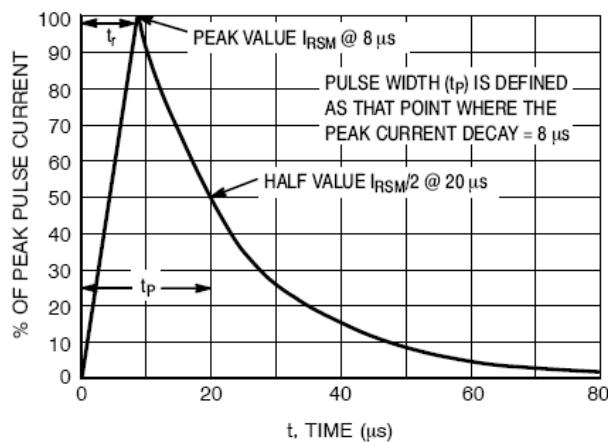

**Figure 3. 8\*20 μs Pulse Waveform**

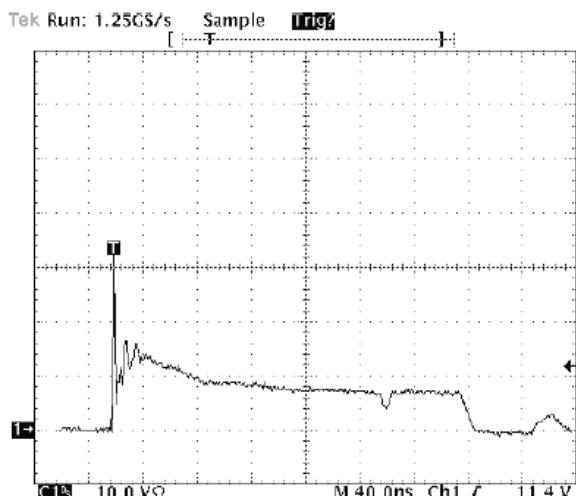

**Figure 4. Positive 8kV contact per IEC 61000-4-2-LESD8D12T5G**

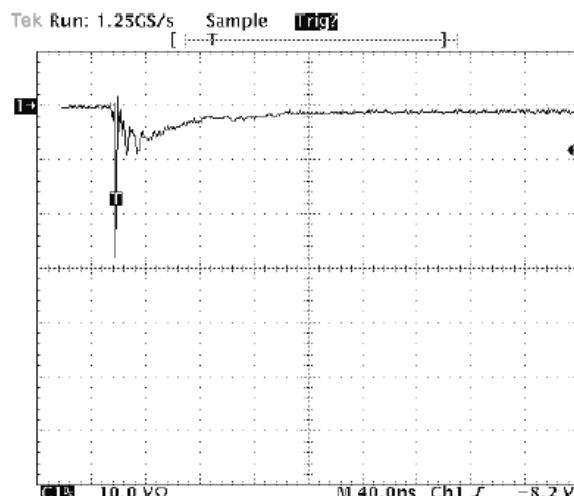


**Fig 5. Negative 8kV contact per IEC 61000-4-2-LESD8D12T5G**


# LESD8D12T5G , S-LESD8D12T5G

## OUTLINE AND DIMENSIONS

SOD882

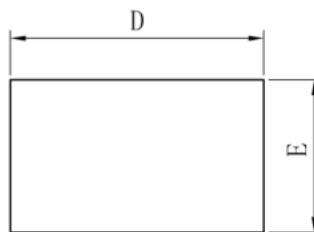


TOP VIEW

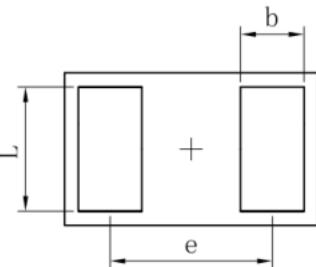

BOTTOM VIEW


| SOD882               |           |      |      |
|----------------------|-----------|------|------|
| Dim                  | Min       | Typ  | Max  |
| D                    | 0.95      | 1.00 | 1.05 |
| E                    | 0.55      | 0.60 | 0.65 |
| e                    | -         | 0.64 | -    |
| L                    | 0.44      | 0.49 | 0.54 |
| b                    | 0.20      | 0.25 | 0.30 |
| A                    | 0.43      | 0.48 | 0.53 |
| A1                   | 0         | -    | 0.05 |
| A3                   | 0.127REF. |      |      |
| All Dimensions in mm |           |      |      |

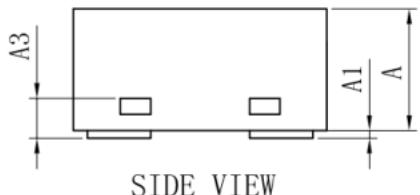

SIDE VIEW

## SOLDERING FOOTPRINT

SOD882

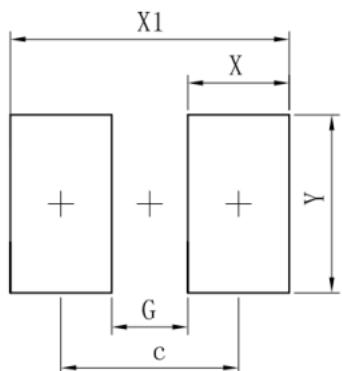

| Dimensions | (mm) |
|------------|------|
| c          | 0.70 |
| G          | 0.30 |
| X          | 0.40 |
| X1         | 1.10 |
| Y          | 0.70 |

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for ESD Suppressors / TVS Diodes category:***

***Click to view products by Leshan manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD105-B1-02EL](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#)  
[MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#)