

# Surface Mount Schottky Power Rectifier

Pb-Free package is available

The LMBR0530T1G uses the Schottky Barrier principle with a large area metal-to-silicon power diode. Ideally suited for low voltage, high frequency rectification or as free wheeling and polarity protection diodes in surface mount applications where compact size and weight are critical to the system. This package also provides an easy to work with alternative to leadless 34 package style. These state-of-the-art devices have the following features:

### Features

- Guardring for Stress Protection
- Low Forward Voltage
- 125°C Operating Junction Temperature
- Epoxy Meets UL 94, V-0 @ 0.125 in
- Package Designed for Optimal Automated Board Assembly
- Pb-Free Packages are Available

### Mechanical Characteristics

- Reel Options: LMBR0530T1G = 3,000 per 7 in reel/8 mm tape  
LMBR0530T3G = 10,000 per 13 in reel/8 mm tape
- Device Marking: B3
- Polarity Designator: Cathode Band
- Weight: 11.7 mg (approximately)
- Case: Epoxy, Molded
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds

### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	30	V
Average Rectified Forward Current (Rated $V_R$ , $T_L = 100^\circ\text{C}$ )	$I_{F(AV)}$	0.5	A
Non-Repetitive Peak Surge Current (Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 Hz)	$I_{FSM}$	5.5	A
Storage Temperature Range	$T_{stg}$	-65 to +150	°C
Operating Junction Temperature	$T_J$	-65 to +125	°C
Voltage Rate of Change (Rated $V_R$ )	dv/dt	1000	V/ $\mu\text{s}$
ESD Rating: Machine Model = C Human Body Model = 3B		> 400 > 8000	V

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

## LMBR0530T1G



SOD-123

### ORDERING INFORMATION

Device	Package	Shipping†
LMBR0530T1G	SOD-123 (Pb-Free)	3000/Tape & Reel
LMBR0530T3G	SOD-123 (Pb-Free)	10,000/Tape & Reel

**LMBR0530T1G**

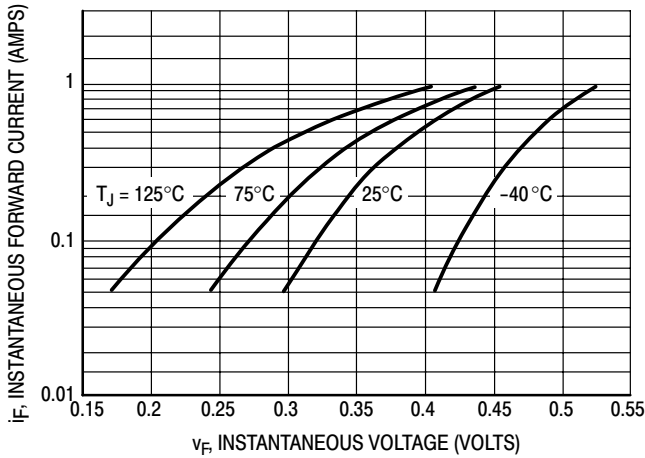
**THERMAL CHARACTERISTICS**

Rating	Symbol	Value	Unit
Thermal Resistance – Junction-to-Ambient (Note 1)	$R_{\theta JA}$	206	$^{\circ}C/W$
Thermal Resistance – Junction-to-Lead	$R_{\theta JL}$	150	$^{\circ}C/W$

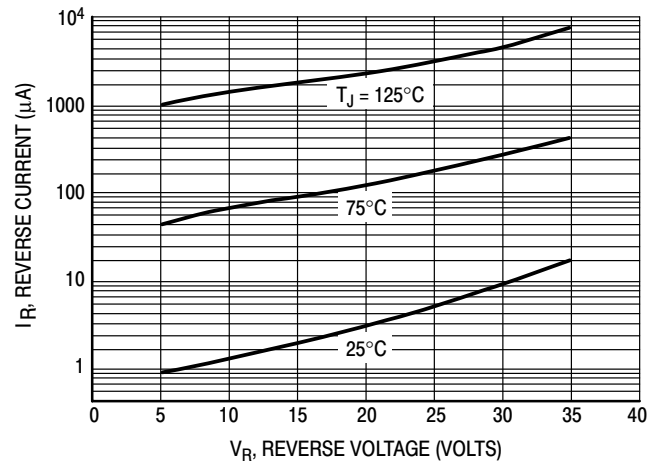
**ELECTRICAL CHARACTERISTICS**

Minimum Reverse Breakdown Voltage ( $i_R = 130 \mu A$ )	$V_{(BR)R}$	30	V
Maximum Instantaneous Forward Voltage (Note 2) ( $i_F = 0.1$ Amps, $T_J = 25^{\circ}C$ ) ( $i_F = 0.5$ Amps, $T_J = 25^{\circ}C$ )	$V_F$	0.375 0.45	V
Maximum Instantaneous Reverse Current (Note 2) (Rated DC Voltage, $T_C = 25^{\circ}C$ ) ( $V_R = 15$ V, $T_C = 25^{\circ}C$ )	$I_R$	130 20	$\mu A$

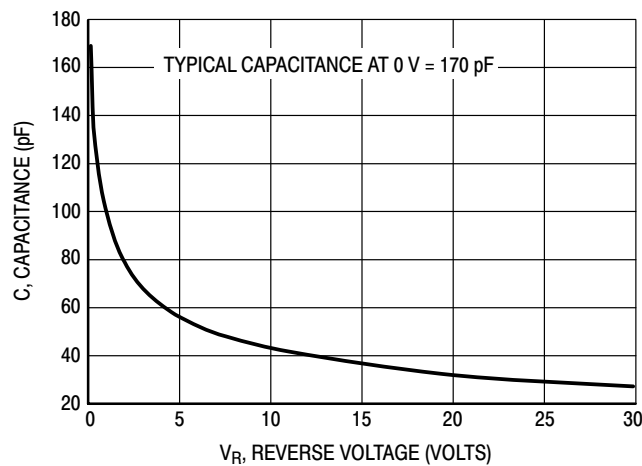
- 1 inch square pad size (1 x 0.5 inch for each lead) on FR4 board.
- Pulse Test: Pulse Width = 300  $\mu s$ , Duty Cycle  $\leq 2\%$ .



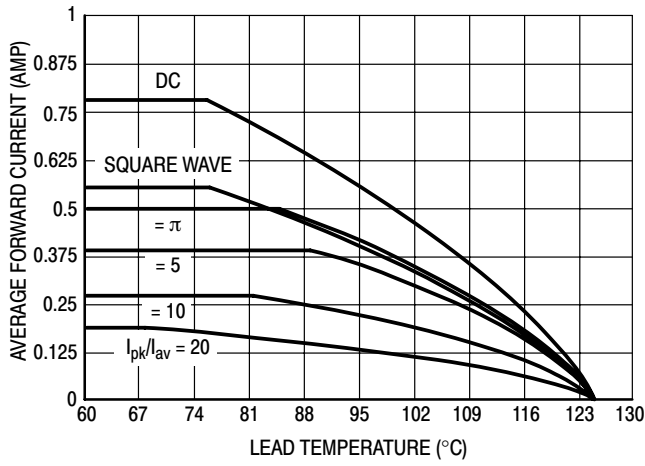
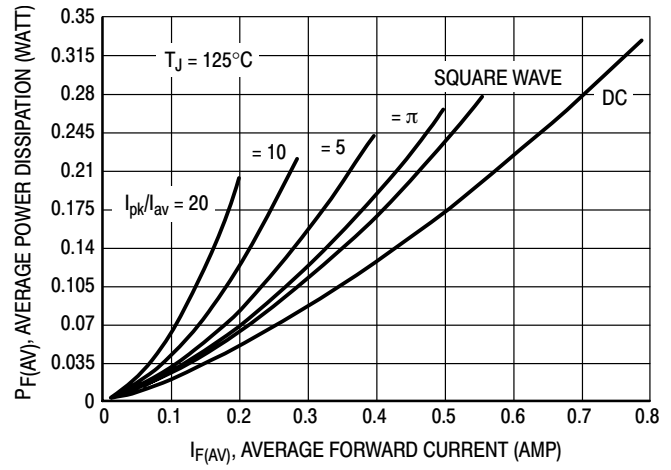
**Figure 1. Typical Forward Voltage**

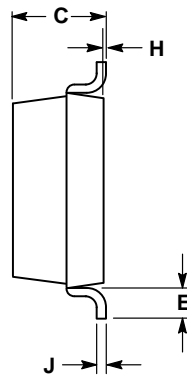
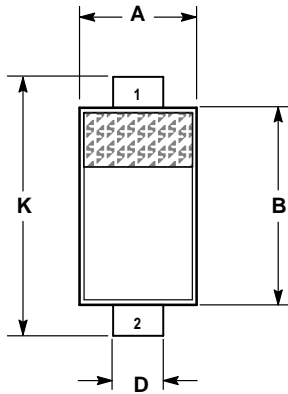


**Figure 2. Typical Reverse Current**



**Figure 3. Typical Capacitance**

**LMBR0530T1G**

**Figure 4. Current Derating (Lead)**

**Figure 5. Power Dissipation**

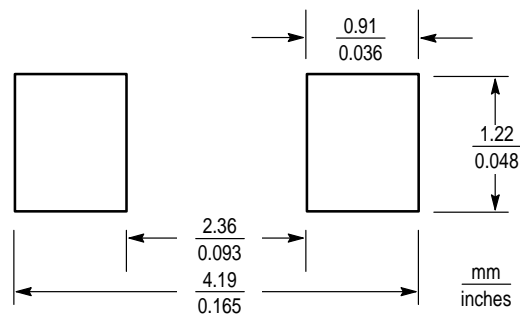
**LMBR0530T1G**
**PACKAGE DIMENSIONS**
**SOD-123**

**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.055	0.071	1.40	1.80
B	0.100	0.112	2.55	2.85
C	0.037	0.053	0.95	1.35
D	0.020	0.028	0.50	0.70
E	0.004	—	0.25	—
H	0.000	0.004	0.00	0.10
J	—	0.006	—	0.15
K	0.140	0.152	3.55	3.85

**STYLE 1:**

- PIN 1. CATHODE
- PIN 2. ANODE

**RECOMMENDED FOOTPRINT FOR SOD-123**

**SOD-123**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [Leshan](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS 3010S-02LRH E6327](#)  
[BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#)  
[SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#)  
[MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [BAS 70-02L E6327](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK32A-](#)  
[TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#)  
[ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [BAT54-](#)  
[13-F](#) [ACDBA340-HF](#) [ACDBA260LR-HF](#)