

Darlington Transistors

PNP Silicon

We declare that the material of product compliance with RoHS requirements.

LMBTA63LT1G
LMBTA64LT1G

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	V_{CES}	-30	Vdc
Collector–Base Voltage	V_{CBO}	-30	Vdc
Emitter–Base Voltage	V_{EBO}	-10	Vdc
Collector Current – Continuous	I_C	-500	mAdc

DEVICE MARKING

LMBTA63LT1G = 2U; LMBTA64LT1G = 2V

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board, ⁽¹⁾ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	225	mW
		1.8	mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	$^\circ\text{C/W}$
Total Device Dissipation Alumina Substrate, ⁽²⁾ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	300	mW
		2.4	mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Junction and Storage Temperature	T_J, T_{stg}	-55 to +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector–Emitter Breakdown Voltage ($I_C = -100 \mu\text{Adc}$)	$V_{(BR)CEO}$	-30	-	Vdc
Collector Cutoff Current ($V_{CB} = -30 \text{ Vdc}$)	I_{CBO}	-	-100	nAdc
Emitter Cutoff Current ($V_{EB} = -10 \text{ Vdc}$)	I_{EBO}	-	-100	nAdc



ON CHARACTERISTICS

DC Current Gain ⁽³⁾ ($I_C = -10 \text{ mAdc}, V_{CE} = -5.0 \text{ Vdc}$) ($I_C = -10 \text{ mAdc}, V_{CE} = -5.0 \text{ Vdc}$) ($I_C = -100 \text{ mAdc}, V_{CE} = -5.0 \text{ Vdc}$) ($I_C = -100 \text{ mAdc}, V_{CE} = -5.0 \text{ Vdc}$)	LMBTA63LT1G LMBTA64LT1G LMBTA63LT1G LMBTA64LT1G	h_{FE}	5,000 10,000 10,000 20,000	- - - -	- - - -
Collector–Emitter Saturation Voltage ($I_C = -100 \text{ mAdc}, I_B = -0.1 \text{ mAdc}$)		$V_{CE(sat)}$	-	-1.5	Vdc
Base–Emitter On Voltage ($I_C = -100 \text{ mAdc}, V_{CE} = -5.0 \text{ Vdc}$)		$V_{BE(on)}$	-	-2.0	Vdc

SMALL-SIGNAL CHARACTERISTICS

Current–Gain – Bandwidth Product ($I_C = -10 \text{ mAdc}, V_{CE} = -5.0 \text{ Vdc}, f = 100 \text{ MHz}$)	f_T	125	-	MHz
---------------------------------------------------------------------------------------------------------------	-------	-----	---	-----

- FR-5 = 1.0 x 0.75 x 0.062 in.
- Alumina = 0.4 x 0.3 x 0.024 in. 99.5% alumina.
- Pulse Test: Pulse Width $\leq 300 \mu\text{s}$, Duty Cycle $\leq 2.0\%$.

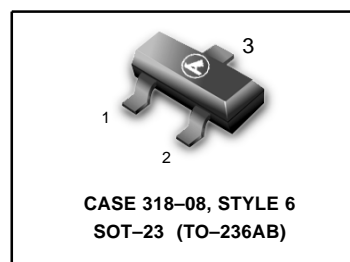

LMBTA63LT1G LMBTA64LT1G

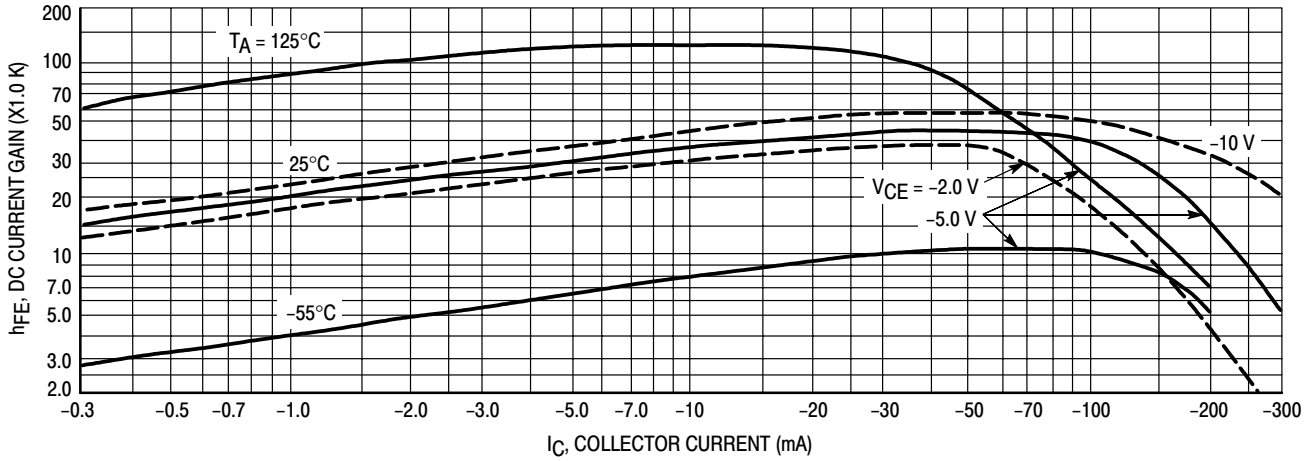


Figure 1. DC Current Gain

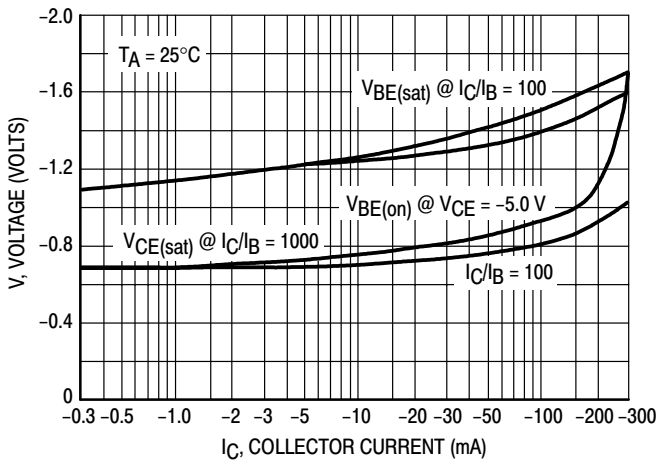


Figure 3. "On" Voltage

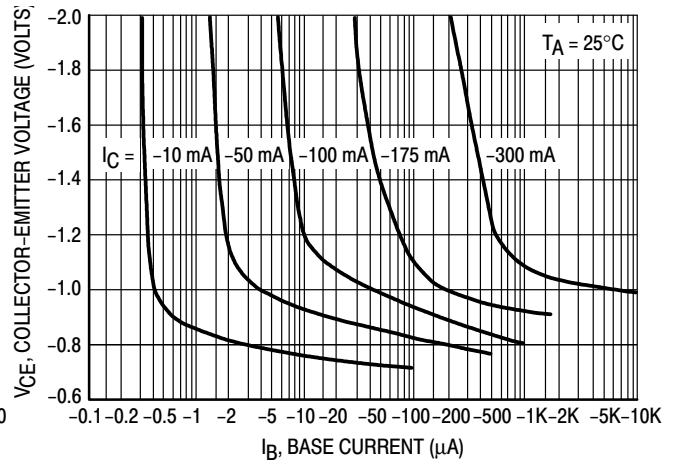


Figure 2. Collector Saturation Region


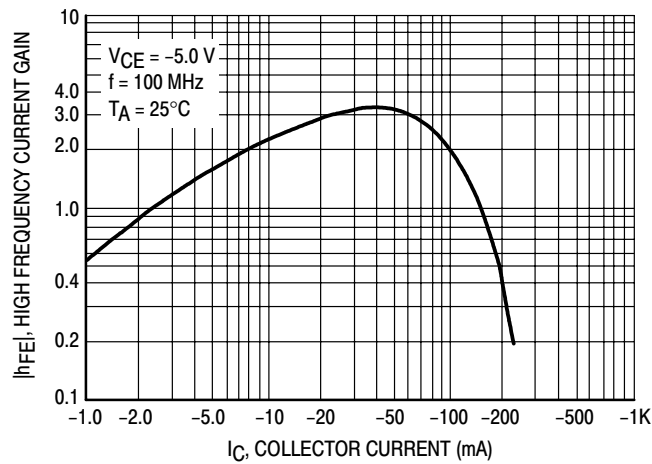



Figure 4. High Frequency Current Gain

LMBTA63LT1G LMBTA64LT1G
SOT-23
NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M,1982
2. CONTROLLING DIMENSION: INCH.

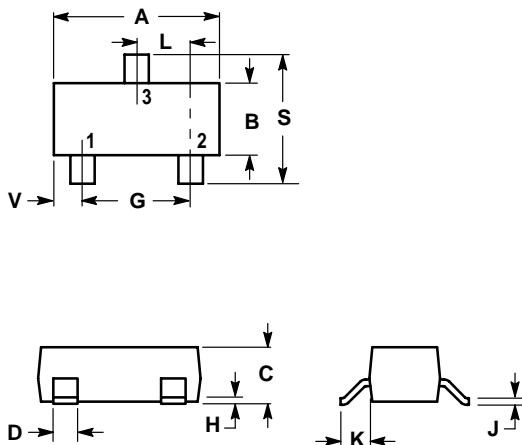

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.1102	0.1197	2.80	3.04
B	0.0472	0.0551	1.20	1.40
C	0.0350	0.0440	0.89	1.11
D	0.0150	0.0200	0.37	0.50
G	0.0701	0.0807	1.78	2.04
H	0.0005	0.0040	0.013	0.100
J	0.0034	0.0070	0.085	0.177
K	0.0140	0.0285	0.35	0.69
L	0.0350	0.0401	0.89	1.02
S	0.0830	0.1039	2.10	2.64
V	0.0177	0.0236	0.45	0.60

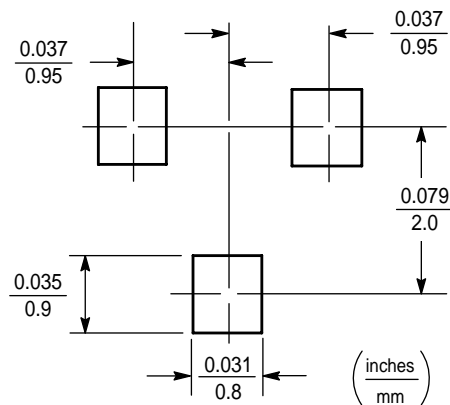

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Darlington Transistors](#) category:

Click to view products by [Leshan](#) manufacturer:

Other Similar products are found below :

[281287X](#) [BDV64B](#) [SBSP52T1G](#) [LB1205-L-E](#) [2N6053](#) [MPSA63](#) [2N6667](#) [NTE256](#) [TIP120](#) [MJ11028](#) [TIP140](#) [TIP127L-BP](#) [2N6383](#)
[ULN2803](#) [ULN2803](#) [HT62083ARWZ](#) [XL2803AG](#) [2SB1560](#) [2SB852KT146B](#) [2SD2560](#) [TIP112TU](#) [BCV27](#) [MMBTA13-TP](#) [MMBTA14-](#)
[TP](#) [MMSTA28T146](#) [NTE2557](#) [NJVNJD35N04T4G](#) [CP527-2N6299-CT5](#) [CP127-2N6301-CT5](#) [MPSA29-D26Z](#) [FJB102TM](#) [FMMT38C](#)
[BCV29](#) [BCV47](#) [FMMT734](#) [BCV46E6327HTSA1](#) [BSP61H6327XTSA1](#) [BU941ZPFI](#) [FZT600](#) [FZT605](#) [FZT705](#) [2SB1316TL](#) [NTE2350](#)
[NTE245](#) [NTE2649](#) [NTE98](#) [ULN2003ADR2G](#) [NTE2344](#) [NTE2349](#) [NTE2405](#)