


LN3406DT2AG

N-Channel 30V (D-S) MOSFET




1. FEATURES

- Low RDS(on) trench technology
- Fast Switching Speed
- Low thermal impedance
- We declare that the material of product are Halogen Free and compliance with RoHS requirements.

2.APPLICATIONS

- White LED boost converters
- Automotive Systems
- DC-DC Converters

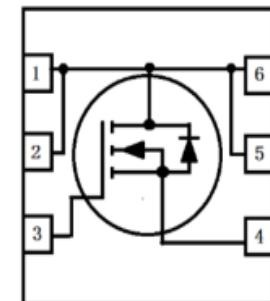

3. DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
LN3406DT2AG	N6S	4000/Tape&Reel

4. MAXIMUM RATINGS(Ta = 25°C unless otherwise stated)

Parameter	Symbol	Limits	Unit
Drain-to-Source Voltage	VDSS	30	V
Gate-to-Source Voltage	VGS	±8	V
Continuous Drain Current(Note 1)	TA =25°C	10	A
	TA =70°C	8.1	A
Pulsed Drain Current (Note 2)	IDM	40	A
Maximum Power Dissipation(Note 1)	TA =25°C	2.1	W
	TA =70°C	1.3	
Operating Junction and Storage Temperature Range	TJ/Tstg	-55 ~+150	°C

5. THERMAL CHARACTERISTICS

Parameter	Symbol	Limits	Unit
Maximum Junction-to-Ambient(Note 1)	t ≤10s	62.5	°C/W
	Steady State	110	

1.Surface mounted on "1.5 x 1.5" FR4 board using 1 sq in pad, 2 oz Cu.





2.Pulse width limited by maximum junction temperature

6. ELECTRICAL CHARACTERISTICS





Characteristic	Symbol	Min.	Typ.	Max.	Unit
Static					
Drain-Source Breakdown Voltage (VGS =0V, ID =250μA)	V(BR)DSS	30	-	-	V
Gate-Source Threshold Voltage (VDS =VGS , ID =250μA)	VGS(th)	0.4	-	1.3	V
Gate Leakage Current (VDS =0V, VGS =±8V)	IGSS	-	-	±100	nA
Zero Gate Voltage Drain Current (VDS = 24 V, VGS = 0 V) (VDS = 24 V, VGS = 0 V, TJ = 55°C)	IDSS	-	-	1 25	μA
Drain-Source On-Resistance (VGS =4.5V, ID = 8A) (VGS =2.5V, ID = 6.8A)	RDS(ON)	-	-	13.5 20	mΩ
Diode Forward Voltage (IS = 1.7 A, VGS = 0 V)	VSD	-	0.68	-	V
DYNAMIC					
Total Gate Charge	(VDS =15V, VGS =4.5V, ID =8A)	Qg	-	24	-
Gate-Source Charge		Qgs	-	5	-
Gate-Drain Charge		Qgd	-	6.8	-
Turn-On Delay Time	(VDS =15V, RL = 1.9Ω, ID=8A,VGEN =4.5V, RGEN =6 Ω)	td(on)	-	19	-
Turn-On Rise Time		tr	-	25	-
Turn-Off Delay Time		td(off)	-	105	-
Turn-Off Fall Time		tf	-	33	-
Input Capacitance	(VDS =15V, VGS =0V,f=1MHz)	Ciss	-	2141	-
Output Capacitance		Coss	-	229	-
Reverse Transfer Capacitance		Crss	-	205	-

3. Pulse test; pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$


7.ELECTRICAL CHARACTERISTICS CURVES

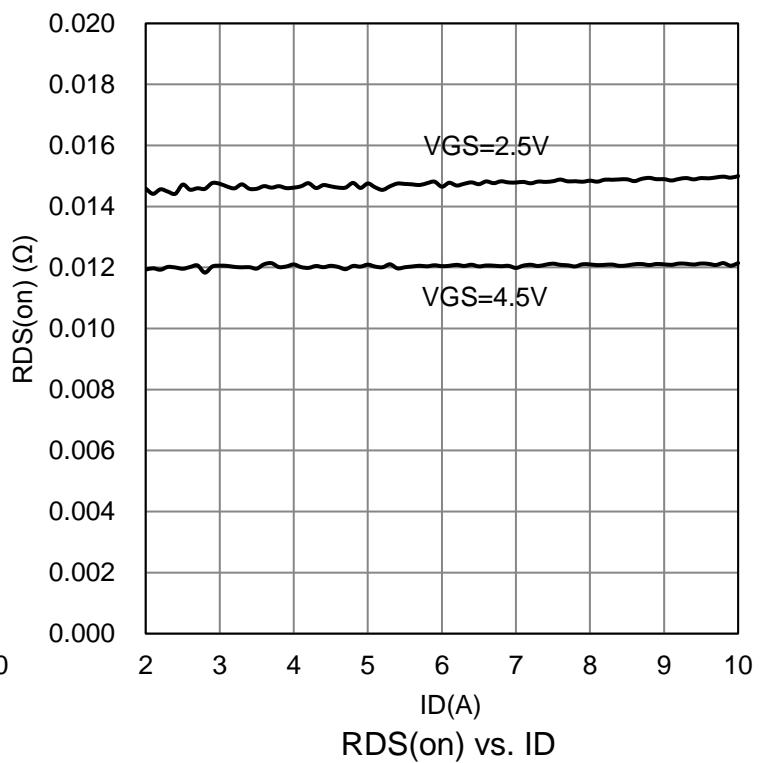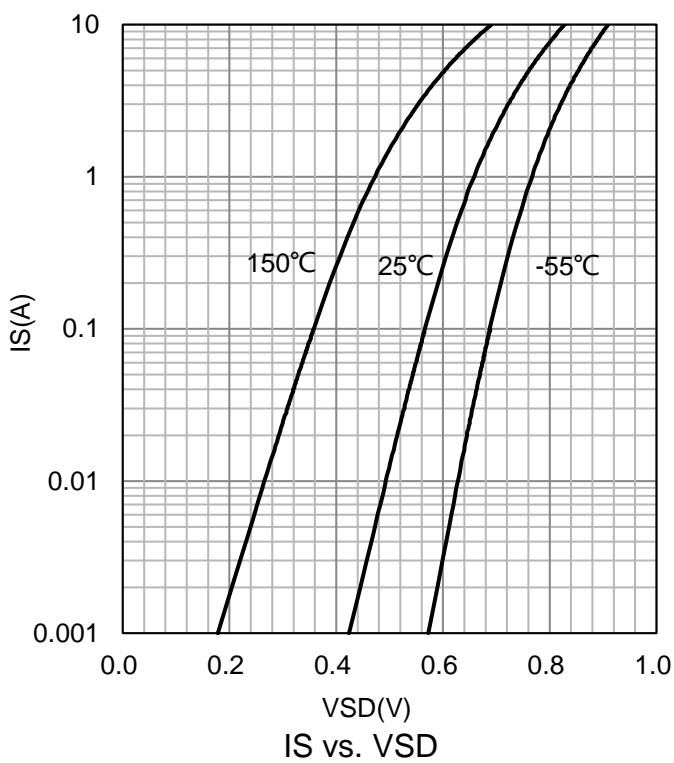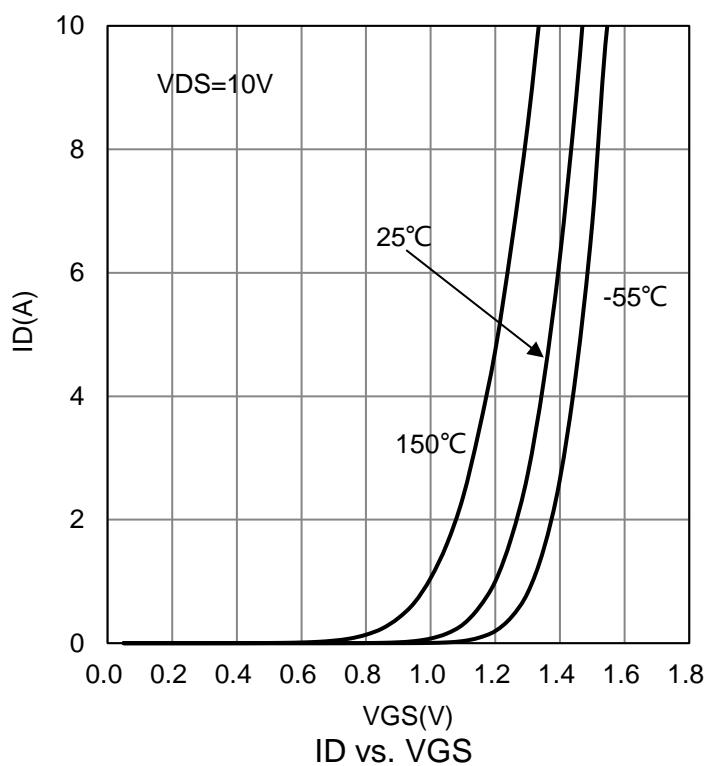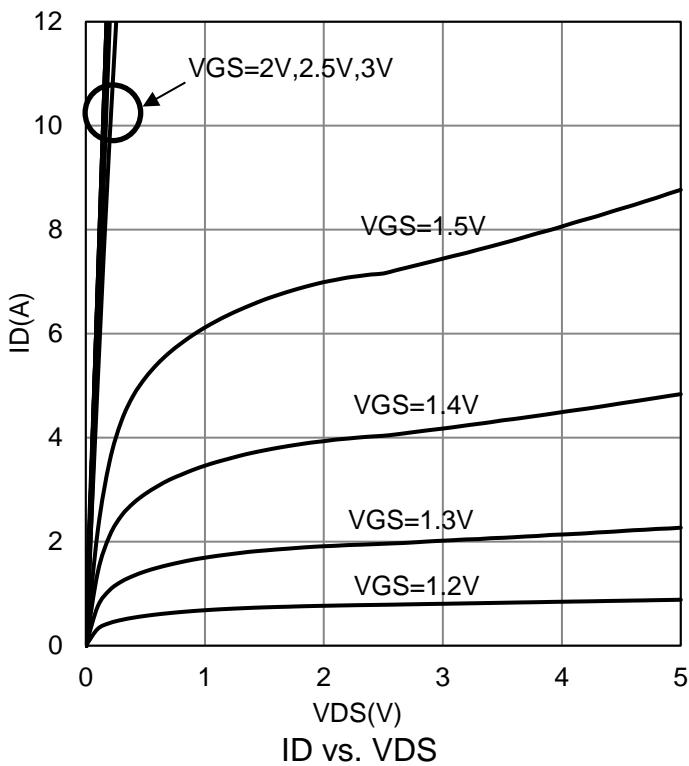


7.ELECTRICAL CHARACTERISTICS CURVES(Con.)

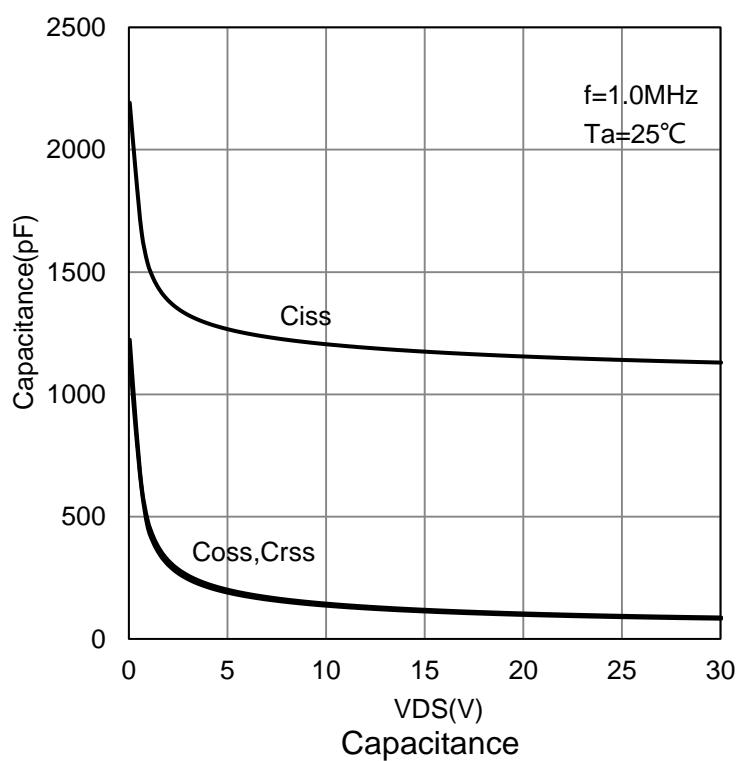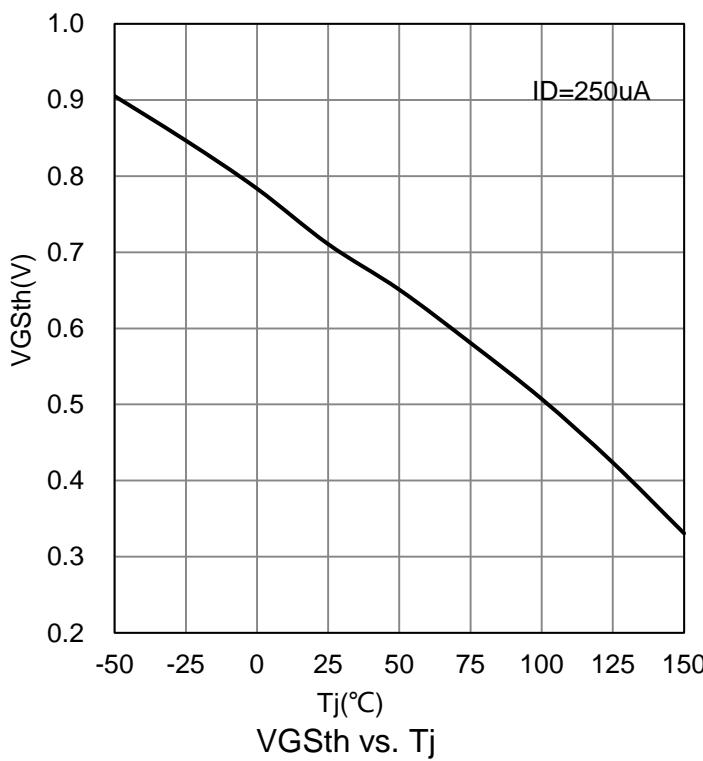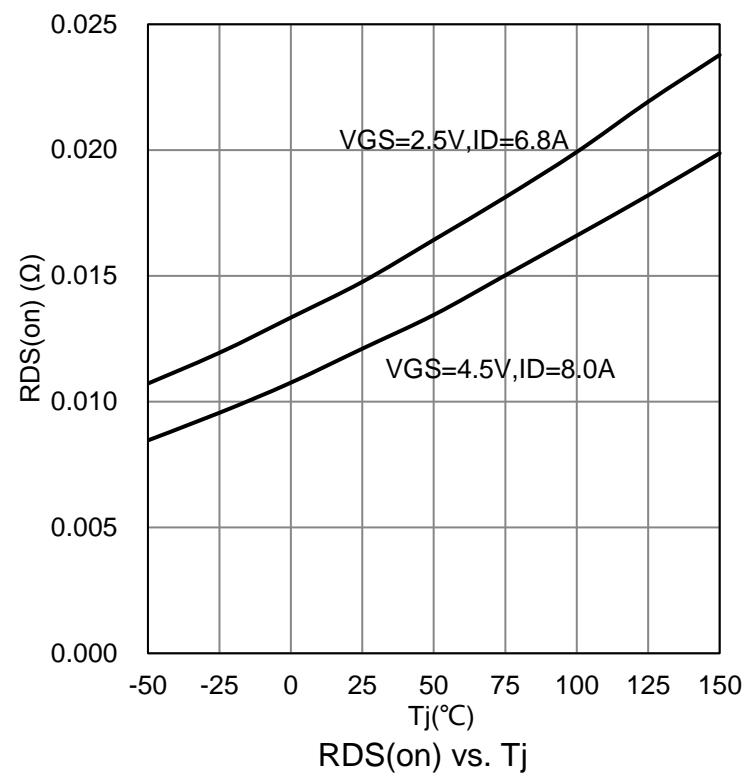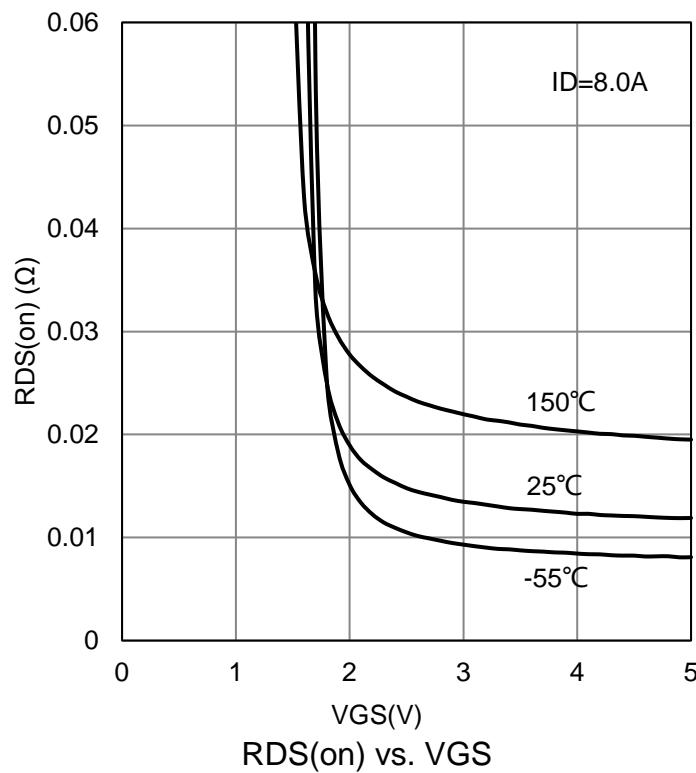


7. ELECTRICAL CHARACTERISTICS CURVES(Con.)

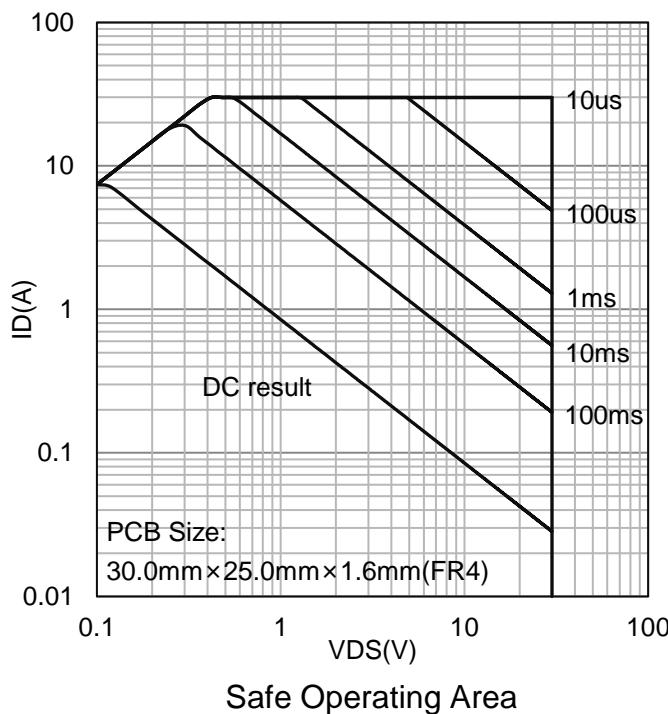

Safe Operating Area

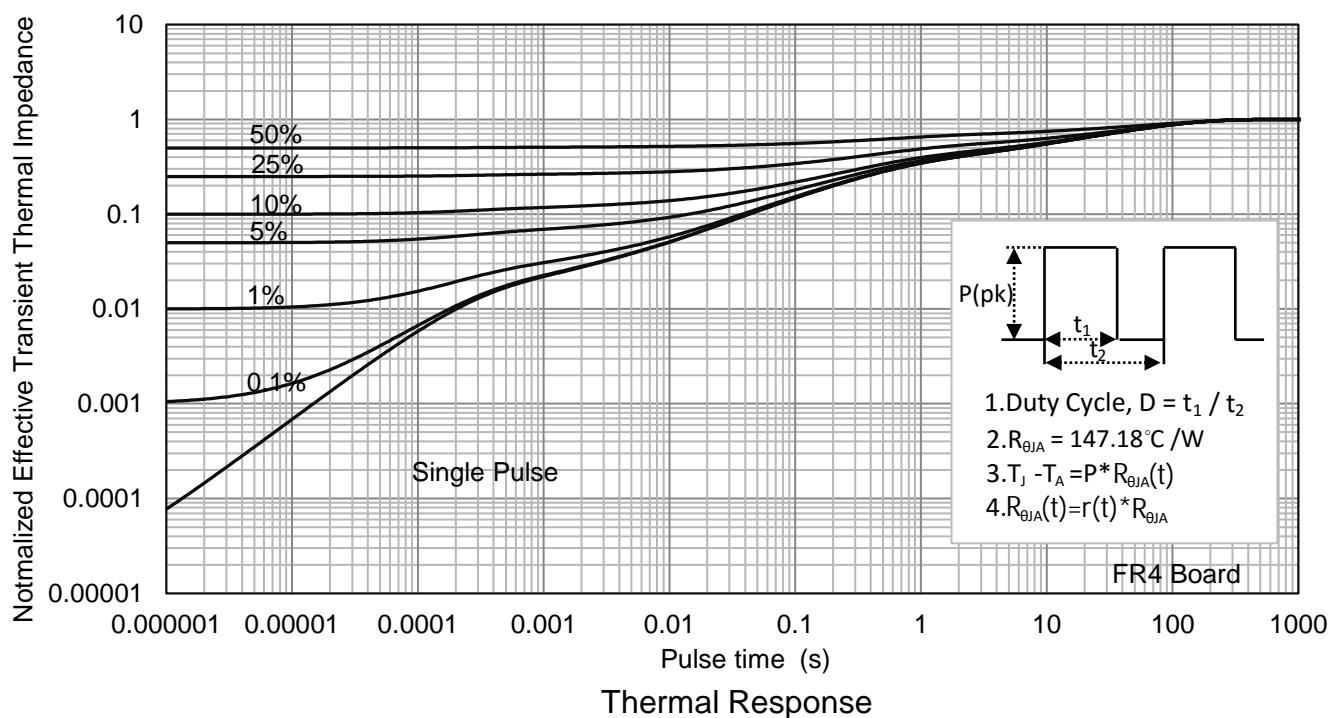


8.OUTLINE AND DIMENSIONS

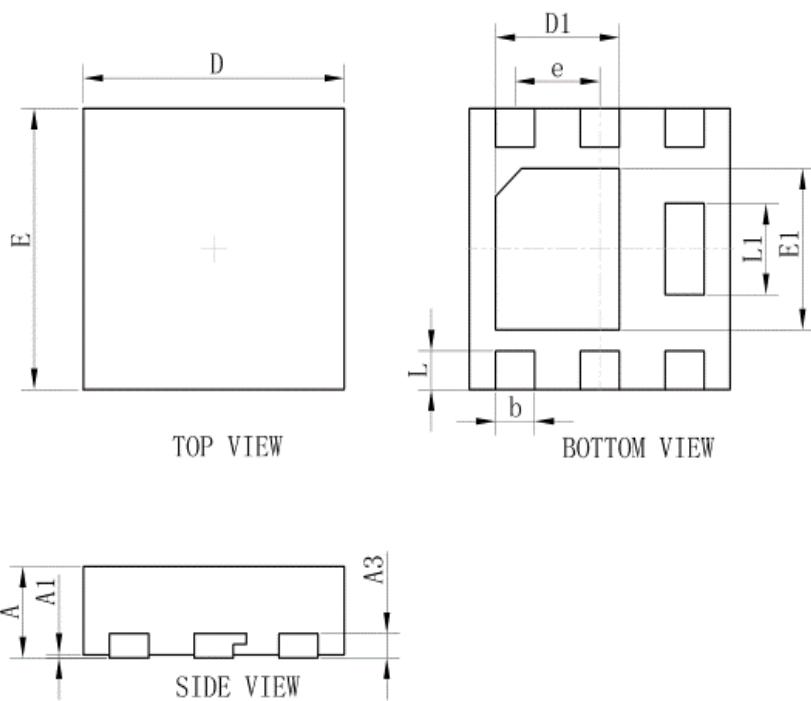

DFN2020-6S			
DIM	MIN	NOR	MAX
A	0.60	0.65	0.70
A1	0.01	0.03	0.05
b	0.25	0.30	0.35
D	1.95	2.00	2.05
E	1.95	2.00	2.05
e	0.65TYP.		
L	0.23	0.28	0.33
L1	0.60	0.65	0.65
D1	0.90	0.95	1.00
E1	1.10	1.15	1.20
A3	0.152REF		
All Dimensions in mm			

9.SOLDERING FOOTPRINT

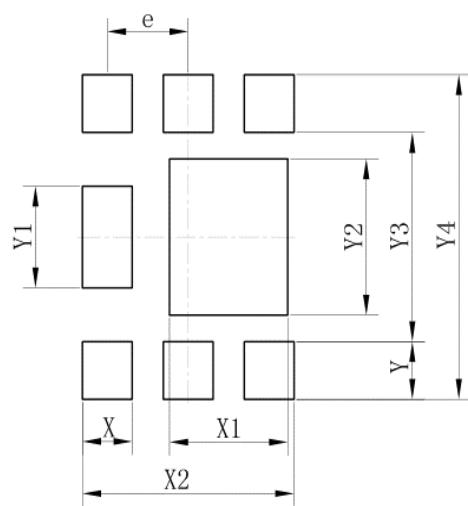

DFN2020-6S	
Dim	(mm)
X	0.40
X1	0.95
X2	1.70
e	0.65
Y	0.43
Y1	0.75
Y2	1.15
Y3	1.54
Y4	2.39



DISCLAIMER

- Before you use our Products, you are requested to carefully read this document and fully understand its contents. LRC shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any LRC's Products against warning, caution or note contained in this document.
- All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using LRC's Products, please confirm the latest information with a LRC sales representative.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by Leshan manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [NTNS3A92PZT5G](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#)
[AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#)
[IPS70R2K0CEAKMA1](#) [BSF024N03LT3 G](#) [PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#)
[EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#)
[DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [IPSA70R950CEAKMA1](#) [IPSA70R2K0CEAKMA1](#) [STU5N65M6](#)
[C3M0021120D](#)