

LN7910DT1WG

N-Channel Power Trench MOSFET

1. FEATURES

- Advanced Package and Silicon combination for low RDS(on) and high efficiency.
- We declare that the material of product compliance with RoHS requirements and Halogen Free.

2. APPLICATIONS

- DC-DC Conversion

3. DEVICE MARKING AND RESISTOR VALUES



Device	Marking	Shipping
LN7910DT1WG	LN7910	3000/Tape&Reel

4. MAXIMUM RATINGS(Ta = 25°C)

Parameter		Symbol	Limits	Unit
Drain-to-Source Voltage		VDS	150	V
Gate-to-Source Voltage		VGS	±20	V
Continuous Drain Current	TC=25°C	ID	60	A
	TC=75°C		53	A
	TA=25°C		12.4	A
	TA=75°C		11	A
Pulsed Drain Current		IDM	48	A
Avalanche Current(L=0.1mH)		IAS	28	A
Avalanche Energy(L=0.1mH)		EAS	39.2	mJ
Power Dissipation	TC=25°C	PD	104	W
	TA=25°C		2.5	
Operating Junction and Storage Temperature Range		Tj/Tstg	-55~+150	°C

5. THERMAL CHARACTERISTICS





Parameter	Symbol	Max	Unit
Junction-to-Ambient	RθJA	50	°C/W
Junction-to-Case	RθJC	1.2	

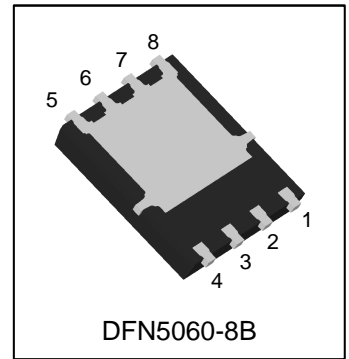





6. ELECTRICAL CHARACTERISTICS (Ta= 25°C)

Characteristic	Symbol	Min.	Typ.	Max.	Unit
STATIC					
Drain to Source Breakdown Voltage (VGS = 0V, ID = 250μA)	BVDSS	150	-	-	V
Drain-to-Source Leakage Current (VDS = 120V, VGS = 0V)	IDSS	-	-	1	uA
Gate-Body leakage current (VDS = 0V, VGS = ±20V)	IGSS	-	-	±100	nA
Gate Threshold Voltage (VDS = VGS, ID = 250μA)	VGS(th)	2	3	4	V
Drain-to-Source On-Resistance (VGS = 10 V, ID = 15 A) (VGS = 6 V, ID = 7 A)	RDS(ON)	- -	9.5 11.5	11.5 15	mΩ
DYNAMIC					
Total Gate Charge	Qg	-	42	-	nC
Gate to Source Charge	Qgs	-	13.7	-	
Gate to Drain Charge	Qgd	-	5.7	-	
Turn-on Delay Time	td(on)	-	30	-	nS
Rise Time	tr	-	30	-	
Turn-Off Delay Time	td(off)	-	72	-	
Fall Time	tf	-	37	-	
Input Capacitance	Ciss	-	3407	-	pF
Output Capacitance	Coss	-	256	-	
Reverse Transfer Capacitance	Crss	-	8	-	
Diode Forward Voltage (VGS = 0 V, IS = 20 A)	VSD	-	0.8	1.2	V
Gate Resistance (VDS=0V, VGS=0V, f=1.0MHz)	Rg	-	2.8	-	Ω

7. ELECTRICAL CHARACTERISTICS CURVES

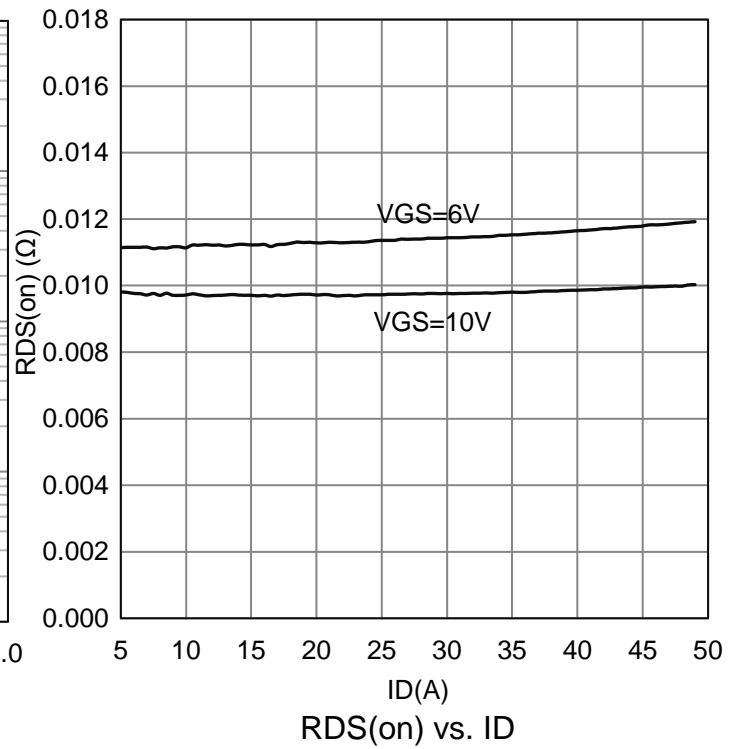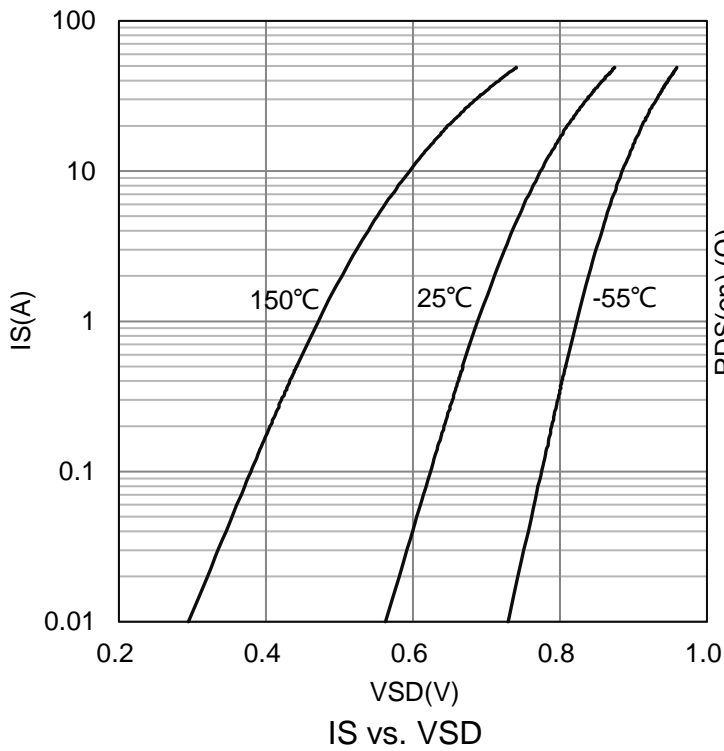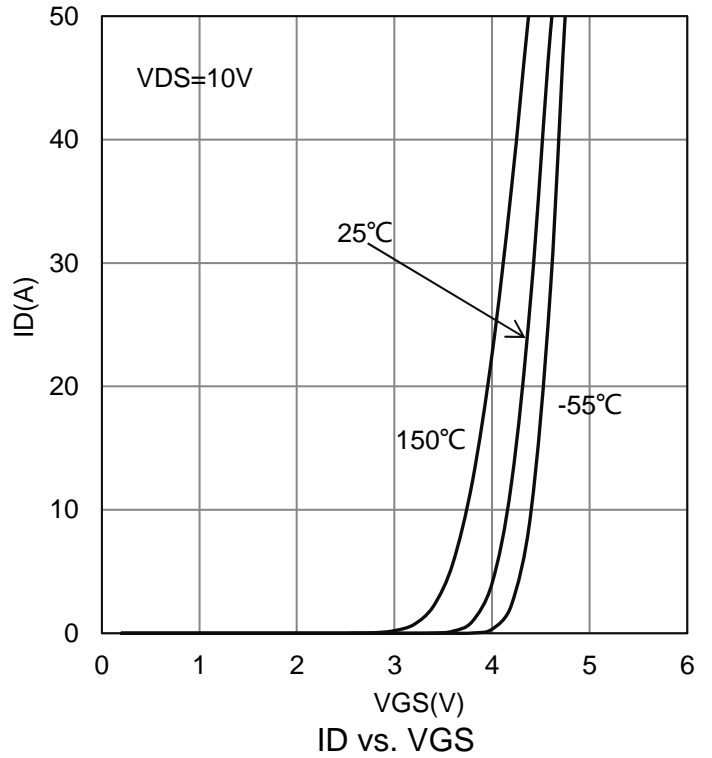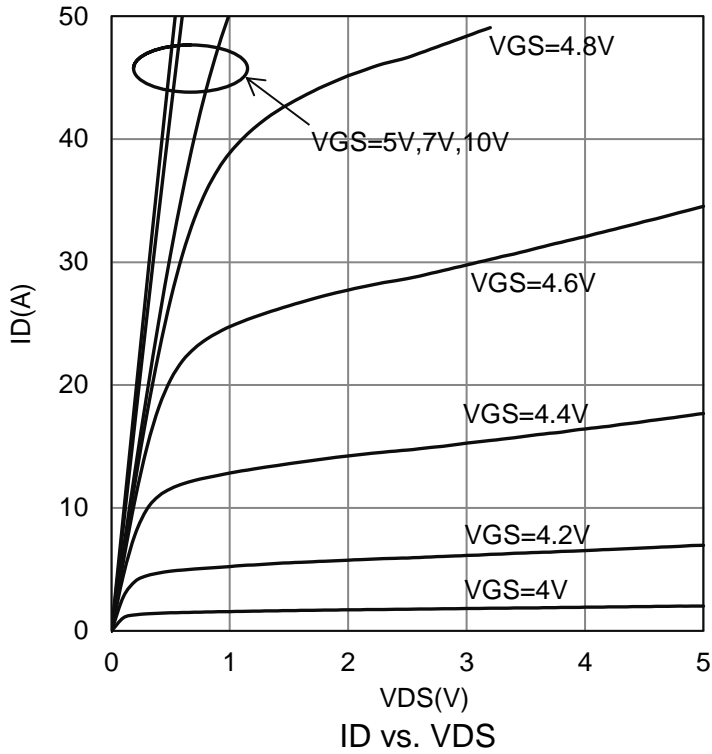

7. ELECTRICAL CHARACTERISTICS CURVES(Con.)

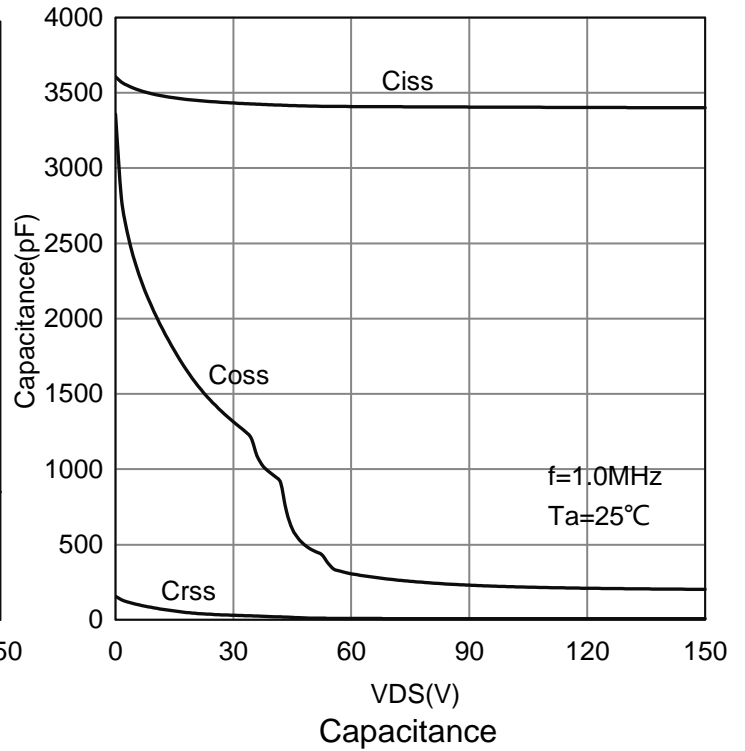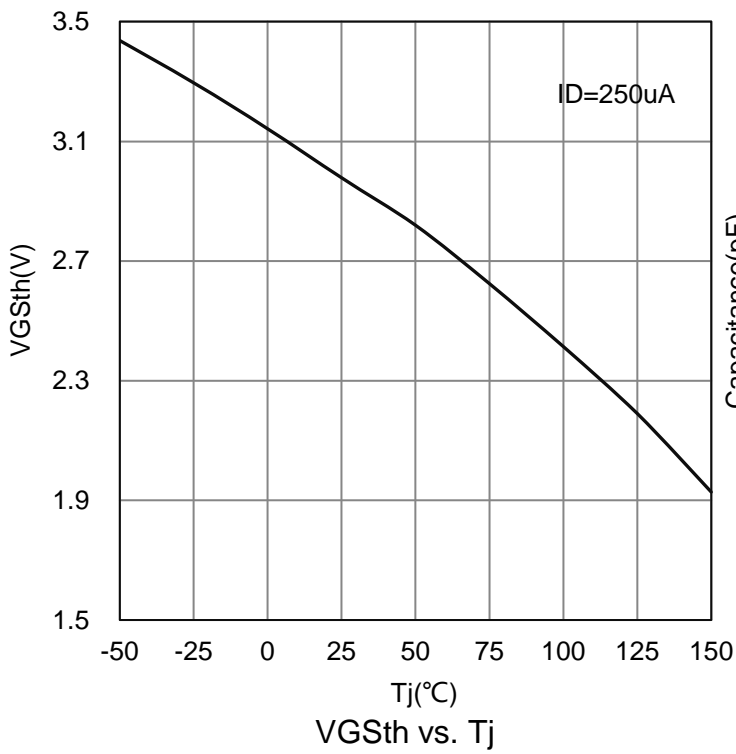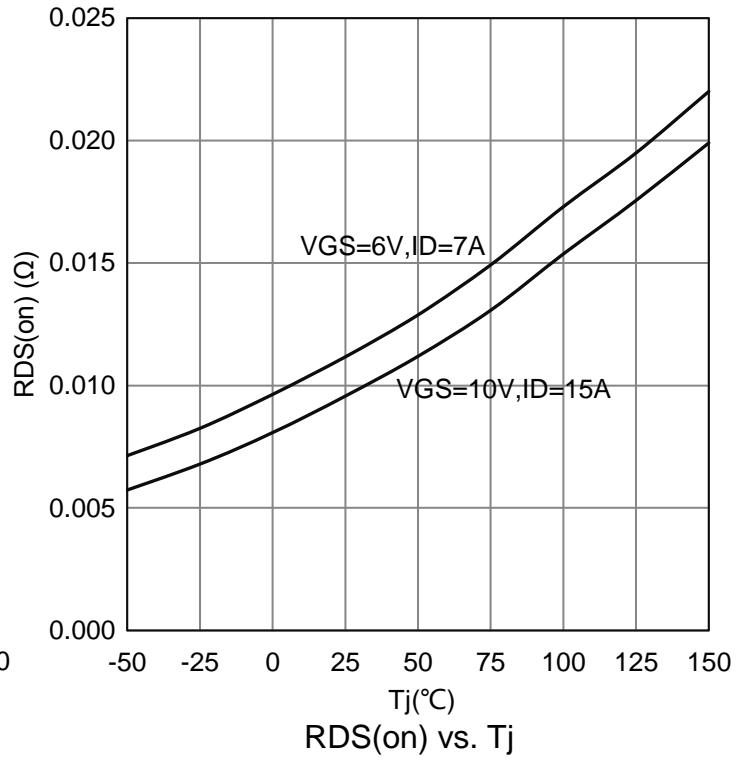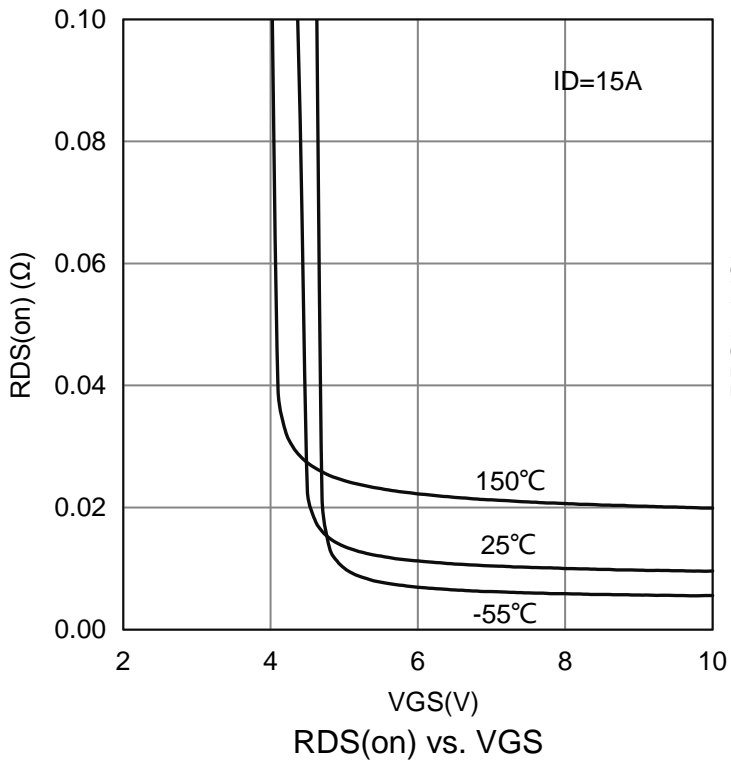

DISCLAIMER

- Before you use our Products, you are requested to carefully read this document and fully understand its contents. LRC shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any LRC's Products against warning, caution or note contained in this document.
- All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using LRC's Products, please confirm the latest information with a LRC sales representative.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [Leshan](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#)
[US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#)
[IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1_T0_00201](#) [PJMF380N65E1_T0_00201](#)
[PJMF280N60E1_T0_00201](#) [PJMF600N65E1_T0_00201](#) [PJMF900N65E1_T0_00201](#) [PJMF900N60E1_T0_00201](#)