

## Series3-Terminal 0.1A Positive Voltage Regulators

# LR78LXXA/B

### DESCRIPTION

The LRC LR78LXX series is monolithic fixed voltage regulator integrated circuit. They are suitable for applications that required supply current up to 100mA.


### FEATURES

- \*Output current up to 100mA
- \*Fixed output voltage of 5V ,9V,12V,15V available
- \*Thermal overload shutdown protection
- \*Short circuit current limiting
- \*We declare that material of product compliance with ROHS requirements.

### ORDERING INFORMATION

\*LR78LXXA: SOT89

\*LR78LXXB: TO-92

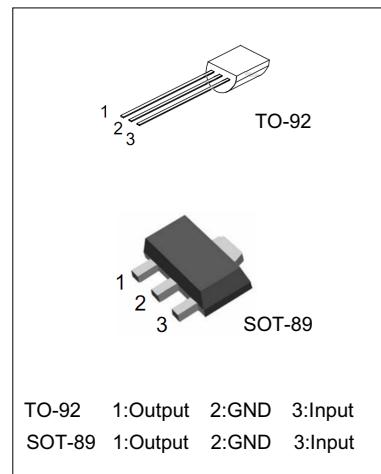


### ABSOLUTE MAXIMUM RATINGS

(Operating temperature range applies unless otherwise specified)

PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Input voltage (for $V_o=5\sim 9V$ ) (for $V_o=12\sim 24V$ )	$V_I$		30 35	V
Output Current	$I_O$		100	mA
Power Dissipation TO-92 SOT-89	PD		625 500	mW
Operating Junction Temperature	$T_J$	-40	+150	°C
Operating Ambient Temperature	$T_{OPR}$	-40	+125	°C
Storage Temperature Range	$T_{STG}$	-55	+150	°C

ESD: HBM 2000V

### APPLICATION CIRCUIT

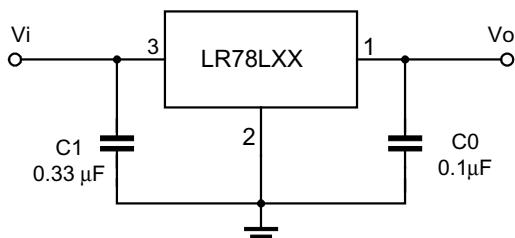

Note 1: To specify an output voltage, substitute voltage value for "XX"

Note 2: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

**LR78L05 ELECTRICAL CHARACTERISTICS**
 $(VI=10V, Io=40mA, -55^{\circ}C < T_j < 125^{\circ}C, C_1=0.33\mu F, Co=0.1\mu F, \text{unless otherwise specified})$ (Note 3)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP.	MAX	UNIT
Output Voltage	Vo	T <sub>j</sub> =25°C	4.80	5.0	5.20	V
		7V<=Vi<=20V, Io=1mA-40mA	4.75		5.25	V
		7V<=Vi<=V <sub>MAX</sub> , Io=1mA-70mA	4.75		5.25	V (Note 2)
Load Regulation	Vo	T <sub>j</sub> =25°C, Io=1mA-100mA		11	60	mV
		T <sub>j</sub> =25°C, Io=1mA-40mA		5.0	30	mV
Line regulation	Vo	7V<=Vi<=20V, T <sub>j</sub> =25°C		8	150	mV
		8V<=Vi<=20V, T <sub>j</sub> =25°C		6	100	mV
Quiescent Current	I <sub>q</sub>	V <sub>IN</sub> =10V, Io=0mA, T <sub>j</sub> =25°C		2.0	5.5	mA
Quiescent Current Change	ΔI <sub>q</sub>	8V<=Vi<=20V			1.5	mA
	ΔI <sub>q</sub>	1mA<=Io<=40mA			0.1	mA
Output Noise Voltage	V <sub>N</sub>	10Hz<=f<=100kHz		40		uV
Ripple Rejection	RR	8V<=Vi<=20V, f=120Hz, T <sub>j</sub> =25°C	40	49		dB
Dropout Voltage	V <sub>d</sub>	T <sub>j</sub> =25°C		1.7		V

**LR78L06 ELECTRICAL CHARACTERISTICS**
 $(VI=12V, Io=40mA, -55^{\circ}C < T_j < 125^{\circ}C, C_1=0.33\mu F, Co=0.1\mu F, \text{unless otherwise specified})$ (Note 3)

Characteristic	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output Voltage	Vo	T <sub>j</sub> =25°C	5.75	6.0	6.25	V
		8.5V≤Vi≤20V, Io=1mA~40mA	5.7		6.3	V
		Io=1mA~70mA	5.7		6.3	V (note 2)
Load Regulation	ΔVo	T <sub>j</sub> =25°C, Io=1mA~100mA		18	60	mV
		T <sub>j</sub> =25°C, Io=1mA~40mA		12	30	mV
Line regulation	ΔVo	8.5V≤Vi≤20V, T <sub>j</sub> =25°C		12	150	mV
		9V≤Vi≤20V, T <sub>j</sub> =25°C		6	100	mV
Quiescent Current	I <sub>q</sub>	V <sub>IN</sub> =12V, IO=0mA, T <sub>j</sub> =25°C		2.0	5.5	mA
Quiescent Current Change	ΔI <sub>q</sub>	9V≤Vi≤20V			1.5	mA
	ΔI <sub>q</sub>	1mA≤Io≤40mA			0.1	mA
Output Noise Voltage	V <sub>N</sub>	10Hz≤f≤100kHz, T <sub>j</sub> =25°		50		μV
Temperature coefficient of Vo	ΔVo/ΔT	Io=5mA		0.75		mV/°C
Ripple Rejection	RR	9V≤Vi≤20V, f=120Hz, T <sub>j</sub> =25°	38	46		dB
Dropout Voltage	V <sub>d</sub>	T <sub>j</sub> =25°C		1.7		V

Note 3: The Maximum steady state usable output current is dependent on input voltage, heat sinking, lead length of the package and copper pattern of PCB. The data above represent pulse test conditions with junction temperatures specified at the initiation of test.

Note 4: Power dissipation<0.5W

**LR78L08 ELECTRICAL CHARACTERISTICS**

( $V_I=14V$ ,  $I_O=40mA$ ,  $-55^{\circ}C < T_j < 125^{\circ}C$ ,  $C_1=0.33\mu F$ ,  $C_0=0.1\mu F$ , unless otherwise specified)(Note 3)

Characteristic	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output Voltage	Vo	$T_j=25^{\circ}C$	7.7	8.0	8.3	V
		$10.5V \leq V_I \leq 23V, I_O=1mA-40mA$	7.6		8.4	V
		$I_O=1mA-70mA$	7.6		8.4	V (note2)
Load Regulation	$\Delta Vo$	$T_j=25^{\circ}C, I_O=1mA-100mA$		24	80	mV
		$T_j=25^{\circ}C, I_O=1mA-40mA$		16	40	mV
Line regulation	$\Delta Vo$	$10.5V \leq V_I \leq 23V, T_j=25^{\circ}C$		16	175	mV
		$11V \leq V_I \leq 23V, T_j=25^{\circ}C$		8	125	mV
Quiescent Current	$I_q$	$V_{IN}=14V, I_O=0mA, T_j=25^{\circ}C$		2.0	5.5	mA
Quiescent Current Change	$\Delta I_q$	$11V \leq V_I \leq 23V$			1.5	mA
	$\Delta I_q$	$1mA \leq I_O \leq 40mA$			0.1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100kHz, T_j=25^{\circ}C$		60		$\mu V$
Temperature coefficient of $Vo$	$\Delta Vo/\Delta T$	$I_O=5mA$		0.8		$mV/{}^{\circ}C$
Ripple Rejection	RR	$12V \leq V_I \leq 23V, f=120Hz, T_j=25^{\circ}C$	36	45		dB
Dropout Voltage	$V_d$			1.7		V

**LR78L09 ELECTRICAL CHARACTERISTICS**

( $V_I=15V, I_O=40mA, -55^{\circ}C < T_j < 125^{\circ}C, C_1=0.33\mu F, C_0=0.1\mu F$ ,unless otherwise specified)(Note 3)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	AX	UNIT
Output Voltage	Vo	$T_j=25^{\circ}C$	8.64	9.0	36	V
		$11.5V \leq V_I \leq 24V, I_O=1mA-40mA$	8.55		9.45	V
		$11.5V \leq V_I \leq V_{MAX}, I_O=1mA-70mA$	8.55		9.45	V (Note 2)
Load Regulation	Vo	$T_j=25^{\circ}C, I_O=1mA-100mA$		20	90	mV
		$T_j=25^{\circ}C, I_O=1mA-40mA$		10	45	mV
Line regulation	Vo	$11.5V \leq V_I \leq 24V, T_j=25^{\circ}C$		90	200	mV
		$13V \leq V_I \leq 24V, T_j=25^{\circ}C$		100	150	mV
Quiescent Current	$I_q$	$V_{IN}=15V, I_O=0mA, T_j=25^{\circ}C$		2.0	5.5	mA
Quiescent Current Change	$\Delta I_q$	$13V \leq V_I \leq 24V$			1.5	mA
	$\Delta I_q$	$1mA \leq I_O \leq 40mA$			0.1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100kHz$		49		UV
Ripple Rejection	RR	$12V \leq V_I \leq 23V, f=120Hz, T_j=25^{\circ}C$	36	44		dB
Dropout Voltage	$V_d$	$T_j=25^{\circ}C$		1.7		V

**LR78L12 ELECTRICAL CHARACTERISTICS**

(VI=19V, I<sub>O</sub>=40mA,-55°C < T<sub>j</sub> < 125°C, C<sub>1</sub>=0.33uF, C<sub>0</sub>=0.1uF, unless otherwise specified)(Note 3)

Characteristic	Symbol	Test conditions		TYP	MAX	UNIT
Output Voltage	V <sub>O</sub>	T <sub>j</sub> =25°C	11.5	12	12.6	V
		14.5V≤V <sub>I</sub> ≤27V,I <sub>O</sub> =1mA~40mA	11.4		12.6	V
		I <sub>O</sub> =1mA~70mA	11.4		12.6	V (note 2)
Load Regulation	ΔV <sub>O</sub>	T <sub>j</sub> =25°C, I <sub>O</sub> =1mA~100mA		36	100	mV
		T <sub>j</sub> =25°C, I <sub>O</sub> =1mA~40mA		24	50	mV
Line regulation	ΔV <sub>O</sub>	14.5V≤V <sub>I</sub> ≤27V,T <sub>j</sub> =25°C		24	250	mV
		16V≤V <sub>I</sub> ≤27V,T <sub>j</sub> =25°C		12	200	mV
Quiescent Current	I <sub>Q</sub>	VI=19V, IO=0mA,Tj=25°C		2.0	5.5	mA
Quiescent Current Change	ΔI <sub>Q</sub>	16V≤V <sub>I</sub> ≤27V			1.5	mA
	ΔI <sub>Q</sub>	1mA≤I <sub>O</sub> ≤40mA			0.1	mA
Output Noise Voltage	V <sub>N</sub>	10Hz≤f≤100kHz, T <sub>j</sub> =25°C		80		μV
Temperature coefficient of V <sub>O</sub>	ΔV <sub>O</sub> /ΔT	I <sub>O</sub> =5mA		1.0		mV/°C
Ripple Rejection	RR	15V≤V <sub>I</sub> ≤25V,f=120Hz,T <sub>j</sub> =25°C	36	42		dB
Dropout Voltage	V <sub>d</sub>			1.7		V

**LR78L15 ELECTRICAL CHARACTERISTICS**

(VI=23V,I<sub>O</sub>=40mA,-55°C < T<sub>j</sub> < 125°C,C<sub>1</sub>=0.33uF,C<sub>0</sub>=0.1uF,unless otherwise specified)(Note 3)

Characteristic	Symbol	Test conditions		TYP	MAX	UNIT
Output Voltage	V <sub>O</sub>	T <sub>j</sub> =25°C	14.4	15	15.6	V
		17.5V≤V <sub>I</sub> ≤30V,I <sub>O</sub> =1mA~40mA	14.25		15.75	V
		I <sub>O</sub> =1mA~70mA	14.25		15.75	V (note 2)
Load Regulation	ΔV <sub>O</sub>	T <sub>j</sub> =25°C,I <sub>O</sub> =1mA~100mA		45	150	mV
		T <sub>j</sub> =25°C,I <sub>O</sub> =1mA~40mA		30	75	mV
Line regulation	ΔV <sub>O</sub>	17.5V≤V <sub>I</sub> ≤30V,T <sub>j</sub> =25°C		30	300	mV
		20V≤V <sub>I</sub> ≤30V,T <sub>j</sub> =25°C		15	250	mV
Quiescent Current	I <sub>Q</sub>	VI=23V,II <sub>O</sub> =0mA,Tj=25°C		2.2	6.0	mA
Quiescent Current Change	ΔI <sub>Q</sub>	20V≤V <sub>I</sub> ≤30V Δ			1.5	mA
	I <sub>Q</sub>	1mA≤I <sub>O</sub> ≤40mA			0.1	mA
Output Noise Voltage	V <sub>N</sub>	10Hz≤f≤100kHz, T <sub>j</sub> =25°C		90		μV
Temperature coefficient of V <sub>O</sub>	ΔV <sub>O</sub> /ΔT	I <sub>O</sub> =5mA		1.3		mV/°C
Ripple Rejection	RR	18.5V≤V <sub>I</sub> ≤28.5V,f=120Hz,T <sub>j</sub> =25°C	33	39		dB
Dropout Voltage	V <sub>d</sub>			1.7		V

## ELECTRICAL CHARACTERISTICS CURVES

Fig.1 LR78L05 Output Voltage vs Ambient Temperature

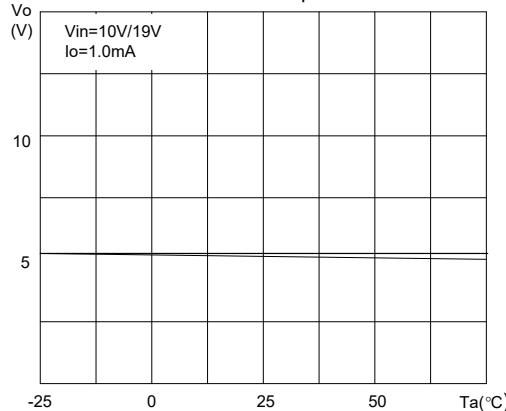


Fig.2 LR78L05 Quiescent Current vs Output Current

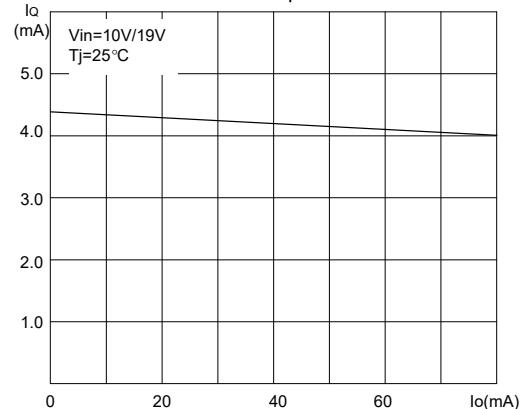


Fig.3 LR78L05 Quiescent Current vs Input

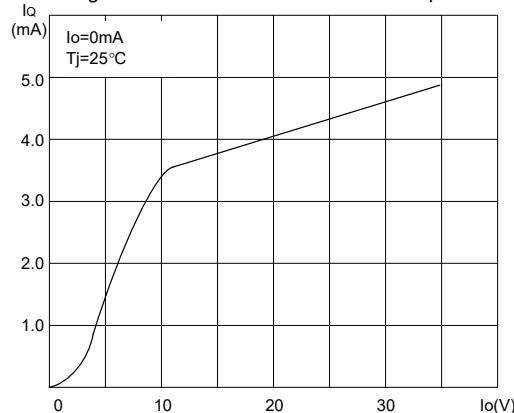


Fig.4 LR78L05 Thermal Shutdown

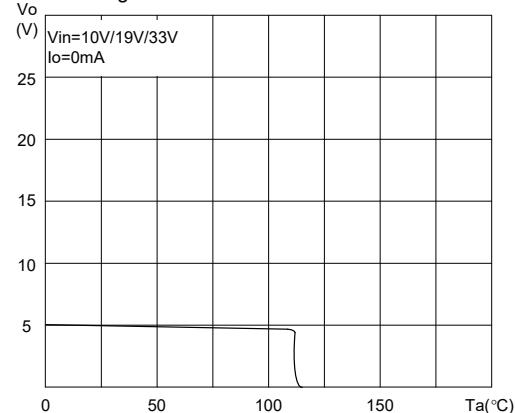


Fig.5 LR78L05 Output Characteristics



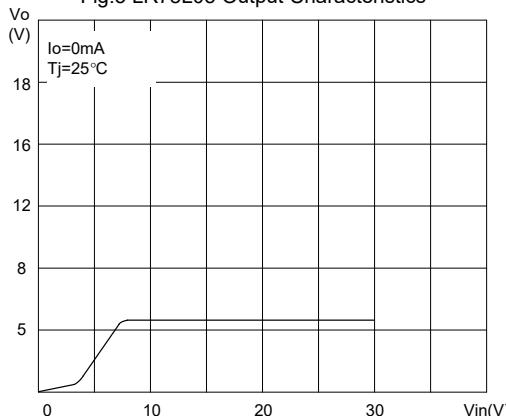


Fig.6 LR78L05 Dropout Characteristics

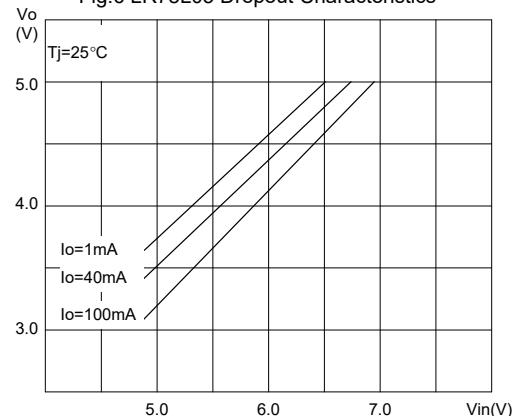

### TO-92 PACKAGE OUTLINE DIMENSIONS

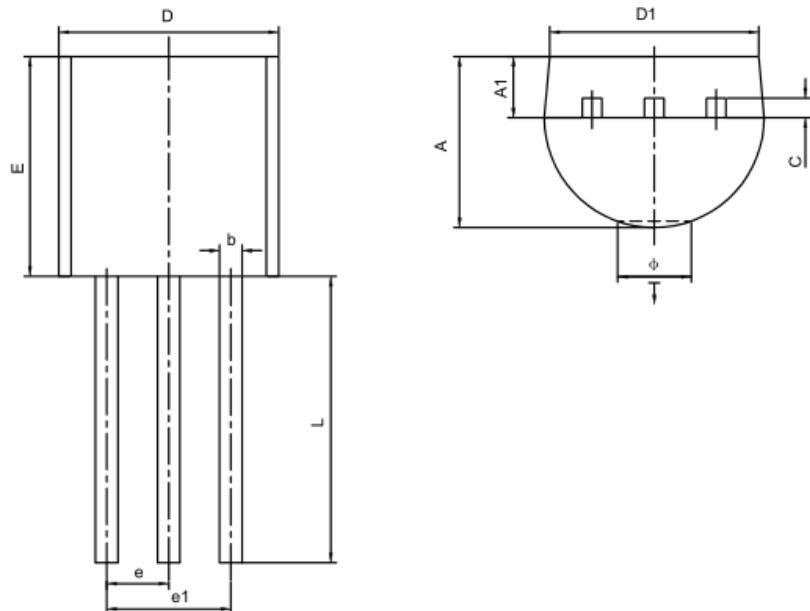


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.400	4.700	0.173	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270TYP		0.050TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Ø		1.600		0.063
↓	0.000	0.380	0.000	0.015

### SHIPPING INFORMATION


1. Bag: 1000 Units/ Bag 10 Bag/ Box(240mm\*170mm\*96mm)  
4 Box/ Chest(365mm\*270mm\*210mm)
2. Tape: 2000 Units/ Box 10 Box/ Chest

### MARKING




## Package Outline Dimension

SOT89-3

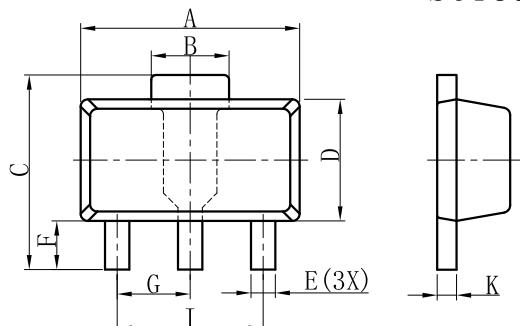

SOT89-3			
DIM	MIN	NOR	MAX
A	4.30	4.50	4.70
B	1.40	1.60	1.80
C	3.90	4.00	4.25
D	2.30	2.50	2.70
E	0.40	0.50	0.58
F	0.90	1.00	1.20
G	1.50 BSC		
I	3.00 BSC		
J	1.40	1.50	1.60
K	0.34	0.40	0.50

All Dimensions in mm

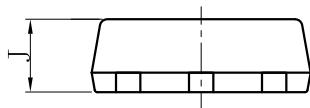


### GENERAL NOTES

- Top package surface finish  $Ra0.4 \pm 0.2\mu m$
- Bottom package surface finish  $Ra0.7 \pm 0.2\mu m$
- Side package surface finish  $Ra0.4 \pm 0.2\mu m$
- Protrusion or Gate Burrs shall not exceed 0.10mm per side.

## Suggested Pad layout

SOT89-3

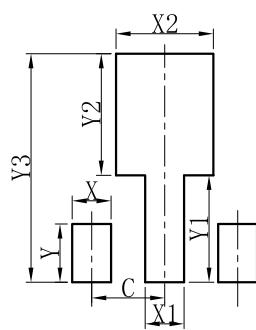


SOT89-3	
DIM	(mm)
X	0.80
Y	1.20
X1	0.80
Y1	2.20
X2	2.00
Y2	2.50
C	1.50
Y3	4.70

## SHIPPING INFORMATION

Tape: 1000 Units/ Reel(7 inch)  
 7 Reel/ Box(226mm\*206mm\*230mm)  
 2 Box/Chest(435mm\*235mm\*247mm)

## MARKING



## DISCLAIMER

- Curve guarantee in the specification. The curve of test items with electric parameter is used as quality guarantee. The curve of test items without electric parameter is used as reference only.
- Before you use our Products for new Project, you are requested to carefully read this document and fully understand its contents. LRC shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of any LRC's Products against warning, caution or note contained in this document.
- All information contained in this document is current as of the issuing date and subject to change without any prior notice. Before purchasing or using LRC's Products, please confirm the latest information with a LRC sales representative.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Linear Voltage Regulators](#) category:***

***Click to view products by [Leshan manufacturer](#):***

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [636416C](#)  
[714954EB](#) [LV5680P-E](#) [L78M15CV-DG](#) [L79M05T-E](#) [MIC5283-5.0YML-T5](#) [TLS202A1MBVHTSA1](#) [L78LR05D-MA-E](#) [NCV317MBTG](#)  
[NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [MP2018GZD-5-Z](#) [MP2018GZD-33-Z](#) [AT55EL50ESE](#)  
[APL5934DKAI-TRG](#) [CL9193A15L5M](#) [CL9036A30F4M](#) [CL9036A18F4M](#) [CL9036A25F4M](#) [CL9036A28F4M](#) [CL9036A33F4M](#)  
[CL9906A18F4N](#) [CL9906A30F4N](#) [CL9908A30F4M](#) [CL9908A33F4M](#) [CL9908A18F4M](#) [CL9908A28F4M](#) [TL431ACM/TR](#) [TL431AIM/TR](#)  
[LM78L05ACM/TR](#) [HT7812ARMZ](#) [HT7805ARMZ](#) [HXY6206I-3.0](#) [HXY6206I-3.3](#) [XC6206P252MR](#) [XC6206P282MR](#) [XC6206P302MR](#)  
[XC6206P332MR](#) [CJ6211B12F](#)