

Series3-Terminal 0.1A Positive Voltage Regulators

LR78LXXA/B

DESCRIPTION

The LRC LR78LXX series is monolithic fixed voltage regulator integrated circuit. They are suitable for applications that required supply current up to 100mA.


FEATURES

- *Output current up to 100mA
- *Fixed output voltage of 5V ,9V,12V,15V available
- *Thermal overload shutdown protection
- *Short circuit current limiting
- *We declare that material of product compliance with ROHS requirements.

ORDERING INFORMATION

*LR78LXXA: SOT89

*LR78LXXB: TO-92

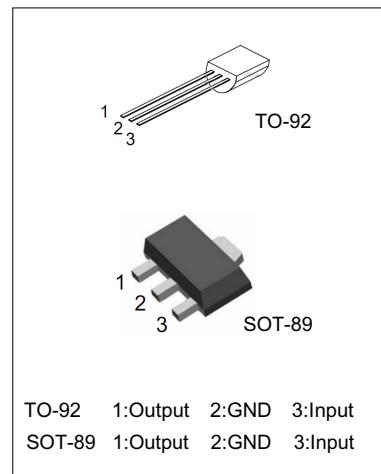


ABSOLUTE MAXIMUM RATINGS

(Operating temperature range applies unless otherwise specified)

PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Input voltage (for $V_o=5\sim 9V$) (for $V_o=12\sim 24V$)	V_I		30 35	V
Output Current	I_O		100	mA
Power Dissipation TO-92 SOT-89	PD		625 500	mW
Operating Junction Temperature	T_J	-40	+150	°C
Operating Ambient Temperature	T_{OPR}	-40	+125	°C
Storage Temperature Range	T_{STG}	-55	+150	°C

ESD: HBM 2000V

APPLICATION CIRCUIT

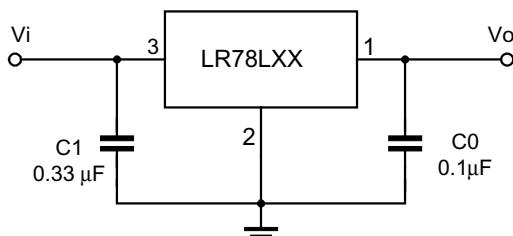

Note 1: To specify an output voltage, substitute voltage value for "XX"

Note 2: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

LR78L05 ELECTRICAL CHARACTERISTICS
 $(VI=10V, Io=40mA, -55^{\circ}C < T_j < 125^{\circ}C, C1=0.33\mu F, Co=0.1\mu F, \text{unless otherwise specified})$ (Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP.	MAX	UNIT
Output Voltage	Vo	Tj=25°C	4.80	5.0	5.20	V
		7V<=Vi<=20V, Io=1mA-40mA	4.75		5.25	V
		7V<=Vi<=VMAX, Io=1mA-70mA	4.75		5.25	V (Note 2)
Load Regulation	Vo	Tj=25°C, Io=1mA-100mA		11	60	mV
		Tj=25°C, Io=1mA-40mA		5.0	30	mV
Line regulation	Vo	7V<=Vi<=20V, Tj=25°C		8	150	mV
		8V<=Vi<=20V, Tj=25°C		6	100	mV
Quiescent Current	Iq	ViN=10V, Io=0mA, Tj=25°C		2.0	5.5	mA
Quiescent Current Change	ΔIq	8V<=Vi<=20V			1.5	mA
	ΔIq	1mA<=Vi<=40mA			0.1	mA
Output Noise Voltage	VN	10Hz<=f<=100kHz		40		uV
Ripple Rejection	RR	8V<=Vi<=20V, f=120Hz, Tj=25°C	40	49		dB
Dropout Voltage	Vd	Tj=25°C		1.7		V

LR78L09 ELECTRICAL CHARACTERISTICS
 $(VI=15V, Io=40mA, -55^{\circ}C < T_j < 125^{\circ}C, C1=0.33\mu F, Co=0.1\mu F, \text{unless otherwise specified})$ (Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP.	AX	UNIT
Output Voltage	Vo	Tj=25°C	8.64	9.0	9.36	V
		11.5V<=Vi<=24V, Io=1mA-40mA	8.55		9.45	V
		11.5V<=Vi<=VMAX, Io=1mA-70mA	8.55		9.45	V (Note 2)
Load Regulation	Vo	Tj=25°C, Io=1mA-100mA		20	90	mV
		Tj=25°C, Io=1mA-40mA		10	45	mV
Line regulation	Vo	11.5V<=Vi<=24V, Tj=25°C		90	200	mV
		13V<=Vi<=24V, Tj=25°C		100	150	mV
Quiescent Current	Iq	ViN=15V, Io=0mA, Tj=25°C		2.0	5.5	mA
Quiescent Current Change	ΔIq	13V<=Vi<=24V			1.5	mA
	ΔIq	1mA<=Vi<=40mA			0.1	mA
Output Noise Voltage	VN	10Hz<=f<=100kHz		49		UV
Ripple Rejection	RR	12V<=Vi<=23V, f=120Hz, Tj=25°C	36	44		dB
Dropout Voltage	Vd	Tj=25°C		1.7		V

Note 1: The Maximum steady state usable output current is dependent on input voltage, heat sinking, lead length of the package and copper pattern of PCB. The data above represent pulse test conditions with junction temperatures specified at the initiation of test.

Note 2: Power dissipation<0.5W

LR78L12 ELECTRICAL CHARACTERISTICS

($V_I=19V$, $I_O=40mA$, $-55^{\circ}C < T_j < 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)(Note 1)

Characteristic	Symbol	Test conditions		TYP	MAX	UNIT
Output Voltage	V_O	$T_j=25^{\circ}C$	11.5	12	12.6	V
		$14.5V \leq V_I \leq 27V, I_O=1mA \sim 40mA$	11.4		12.6	V
		$I_O=1mA \sim 70mA$	11.4		12.6	V (note 2)
Load Regulation	ΔV_O	$T_j=25^{\circ}C, I_O=1mA \sim 100mA$		36	100	mV
		$T_j=25^{\circ}C, I_O=1mA \sim 40mA$		24	50	mV
Line regulation	ΔV_O	$14.5V \leq V_I \leq 27V, T_j=25^{\circ}C$		24	250	mV
		$16V \leq V_I \leq 27V, T_j=25^{\circ}C$		12	200	mV
Quiescent Current	I_Q	$I_O=0mA, T_j=25^{\circ}C$		2.0	5.5	mA
Quiescent Current Change	ΔI_Q	$16V \leq V_I \leq 27V$			1.5	mA
	ΔI_Q	$1mA \leq V_I \leq 40mA$			0.1	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz, T_j=25^{\circ}C$		80		μV
Temperature coefficient of V_O	$\Delta V_O/\Delta T$	$I_O=5mA$		1.0		$mV/^{\circ}C$
Ripple Rejection	RR	$15V \leq V_I \leq 25V, f=120Hz, T_j=25^{\circ}C$	36	42		dB
Dropout Voltage	V_d			1.7		V

LR78L15 ELECTRICAL CHARACTERISTICS

($V_I=23V$, $I_O=40mA$, $-55^{\circ}C < T_j < 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)(Note 1)

Characteristic	Symbol	Test conditions		TYP	MAX	UNIT
Output Voltage	V_O	$T_j=25^{\circ}C$	14.4	15	15.6	V
		$17.5V \leq V_I \leq 30V, I_O=1mA \sim 40mA$	14.25		15.75	V
		$I_O=1mA \sim 70mA$	14.25		15.75	V (note 2)
Load Regulation	ΔV_O	$T_j=25^{\circ}C, I_O=1mA \sim 100mA$		45	150	mV
		$T_j=25^{\circ}C, I_O=1mA \sim 40mA$		30	75	mV
Line regulation	ΔV_O	$17.5V \leq V_I \leq 30V, T_j=25^{\circ}C$		30	300	mV
		$20V \leq V_I \leq 30V, T_j=25^{\circ}C$		15	250	mV
Quiescent Current	I_Q	$I_O=0mA, T_j=25^{\circ}C$		2.2	6.0	mA
Quiescent Current Change	ΔI_Q	$20V \leq V_I \leq 30V$			1.5	mA
	ΔI_Q	$1mA \leq V_I \leq 40mA$			0.1	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz, T_j=25^{\circ}C$		90		μV
Temperature coefficient of V_O	$\Delta V_O/\Delta T$	$I_O=5mA$		1.3		$mV/^{\circ}C$
Ripple Rejection	RR	$18.5V \leq V_I \leq 28.5V, f=120Hz, T_j=25^{\circ}C$	33	39		dB
Dropout Voltage	V_d			1.7		V

ELECTRICAL CHARACTERISTICS CURVES

Fig.1 LR78L05 Output Voltage vs Ambient Temperature

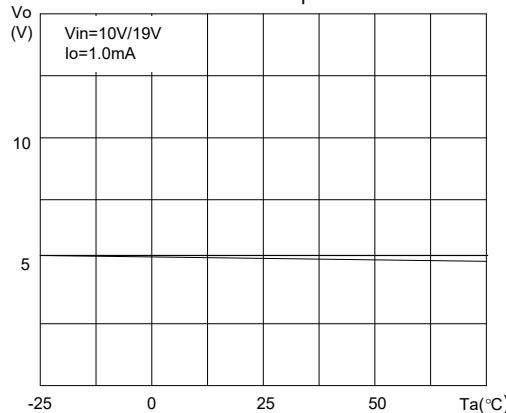


Fig.2 LR78L05 Quiescent Current vs Output Current

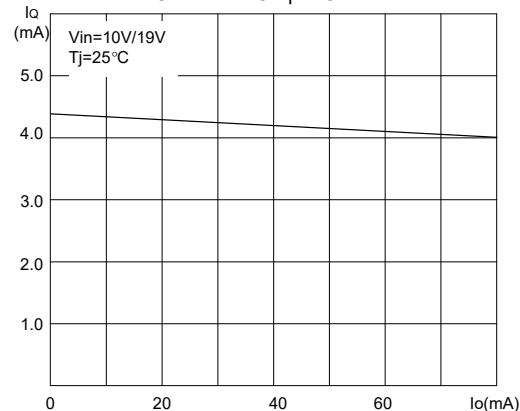


Fig.3 LR78L05 Quiescent Current vs Input

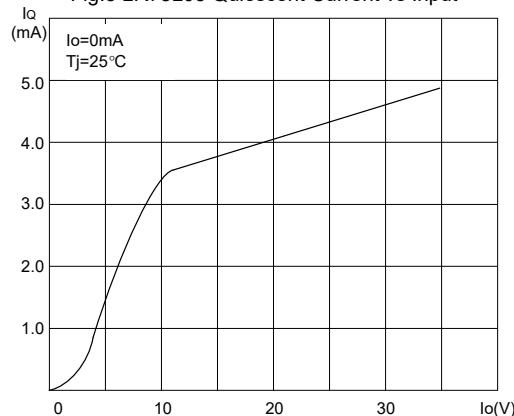


Fig.4 LR78L05 Thermal Shutdown

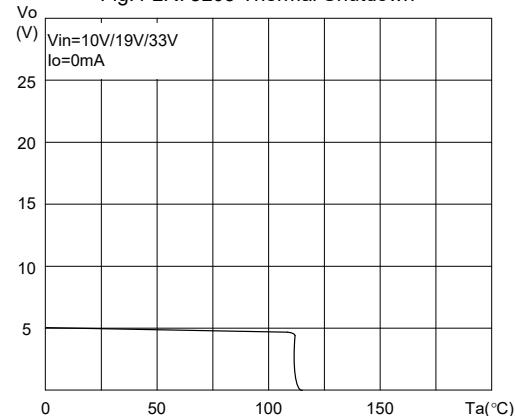


Fig.5 LR78L05 Output Characteristics



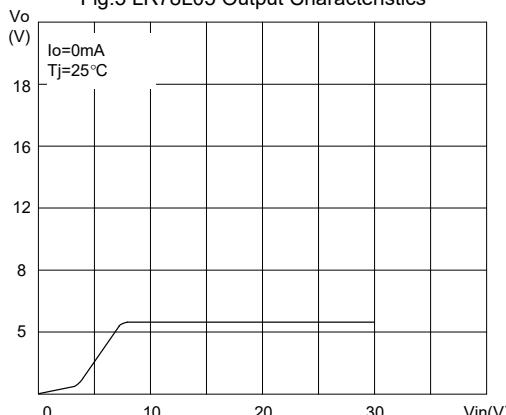


Fig.6 LR78L05 Dropout Characteristics

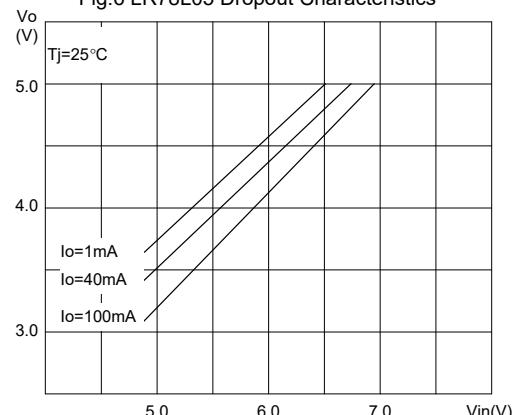

TO-92 PACKAGE OUTLINE DIMENSIONS

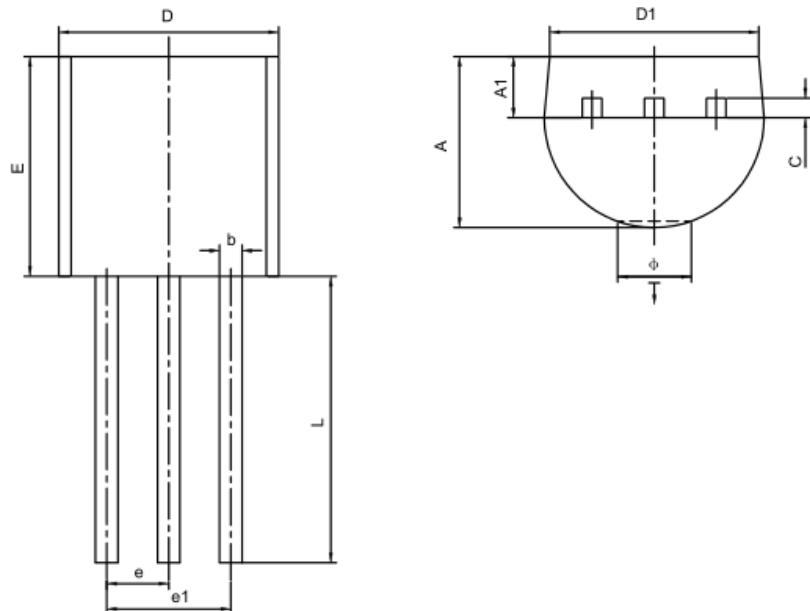


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.400	4.700	0.173	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270TYP		0.050TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Ø		1.600		0.063
↓	0.000	0.380	0.000	0.015

SHIPPING INFORMATION


1. Bag: 1000 Units/ Bag 10 Bag/ Box(240mm*170mm*96mm)
4 Box/ Chest(365mm*270mm*210mm)
2. Tape: 2000 Units/ Box 10 Box/ Chest

MARKING




Package Outline Dimension

SOT89-3

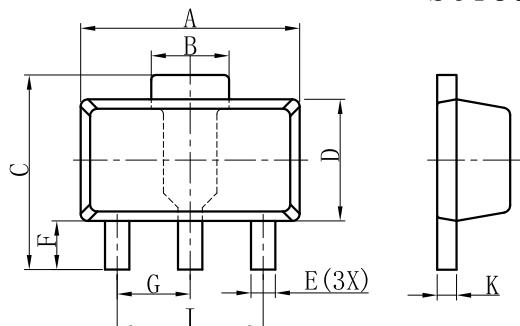

SOT89-3			
DIM	MIN	NOR	MAX
A	4.30	4.50	4.70
B	1.40	1.60	1.80
C	3.90	4.00	4.25
D	2.30	2.50	2.70
E	0.40	0.50	0.58
F	0.90	1.00	1.20
G	1.50 BSC		
I	3.00 BSC		
J	1.40	1.50	1.60
K	0.34	0.40	0.50

All Dimensions in mm

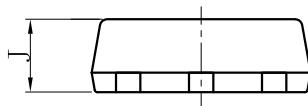


GENERAL NOTES

- Top package surface finish $Ra0.4 \pm 0.2\mu m$
- Bottom package surface finish $Ra0.7 \pm 0.2\mu m$
- Side package surface finish $Ra0.4 \pm 0.2\mu m$
- Protrusion or Gate Burrs shall not exceed 0.10mm per side.

Suggested Pad layout

SOT89-3

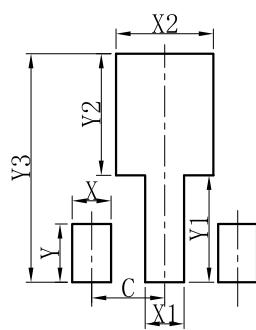


SOT89-3	
DIM	(mm)
X	0.80
Y	1.20
X1	0.80
Y1	2.20
X2	2.00
Y2	2.50
C	1.50
Y3	4.70

SHIPPING INFORMATION

Tape: 1000 Units/ Reel(7 inch)
 7 Reel/ Box(226mm*206mm*230mm)
 2 Box/Chest(435mm*235mm*247mm)

MARKING



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [Leshan manufacturer](#):

Other Similar products are found below :

[LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [714954EB](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [ZTS6538SE](#) [UA78L09CLP](#) [UA78L09CLPR](#) [CAT6221-PPTD-GT3](#) [MC78M09CDTRK](#) [NCV51190MNTAG](#) [78M05](#) [HT7150-1](#) [UM1540DB-18](#) [XC6234H281VR-G](#) [WL2834CA-6/TR](#) [TPL730F33-5TR](#) [TLS850F1TA V50](#) [TPS549B22RVFR](#) [UM1540DB-33](#) [WL9200P3-50B](#) [WL9100P3-33B](#) [WL9005D4-33](#) [XC6219B152MR](#) [WL2855K33-3/TR](#) [PJ54BM33SE](#) [PJ9500M25SA](#) [MD7218E33PC1](#) [H7533-2PR](#) [SK7812AU](#) [SD1A30](#) [78L33](#) [TP78L33T3](#) [L78L33ACUTR](#) [SK6513ST3A-50](#) [SK6054D4-09](#) [SK6054D4-18](#) [SK6054D4-11](#) [SK6054D4-10](#) [LM79L12F](#)