



LRB551V-30T1G

S-LRB551V-30T1G

Schottky Barrier Diode

1. FEATURES

- We declare that the material of product compliance with RoHS requirements and Halogen Free.
- S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.
- Ultra low VF(VF=0.45V Typ. at 0.5A)
- High reliability

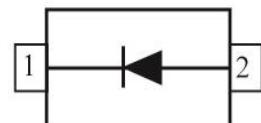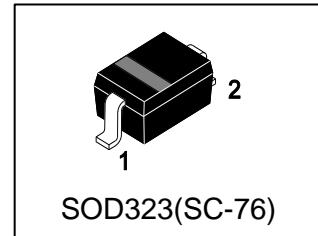

2. APPLICATIONS

- High-frequency rectification and Switching regulators

3. DEVICE MARKING AND ORDERING INFORMATION

| Device | Marking | Shipping |
|---------------|---------|-----------------|
| LRB551V-30T1G | D | 3000/Tape&Reel |
| LRB551V-30T3G | D | 10000/Tape&Reel |

4. MAXIMUM RATINGS(Ta = 25°C)

| Parameter | Symbol | Limits | Unit |
|----------------------------|--------|--------|------|
| Peak Reverse Voltage | VRM | 30 | V |
| DC Reverse Voltage | VR | 20 | V |
| Mean Rectifying Current | IO | 0.5 | A |
| Peak Forward Surge Current | IFMS | 2 | A |

5. THERMAL CHARACTERISTICS




| Parameter | Symbol | Limits | Unit |
|---|---------------------|-------------|-------------|
| Total Device Dissipation, FR-5 Board (Note 1) @ TA = 25°C Derate above 25°C | PD | 200 1.57 | mW mW/°C |
| Thermal Resistance, Junction-to-Ambient(Note 1) | R _{θJA} | 635 | °C/W |
| Junction and Storage temperature | T _{J,Tstg} | -40 ~ +125 | °C |

1. FR-5 = 1.0×0.75×0.062 in.


6. ELECTRICAL CHARACTERISTICS (Ta= 25°C)

| Characteristic | Symbol | Min. | Typ. | Max. | Unit |
|---|--------|------|------|--------------|------|
| Forward voltage (IF=100mA) (IF=500mA) | VF | - | - | 0.36 0.54 | V |
| Reverse Current(VR=20V) | IR | - | - | 100 | μA |

7. ELECTRICAL CHARACTERISTICS CURVES

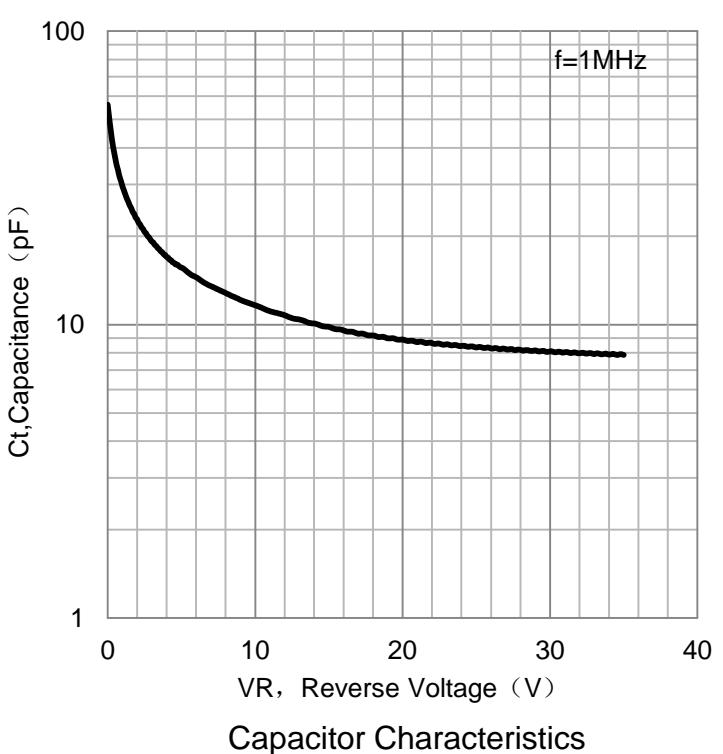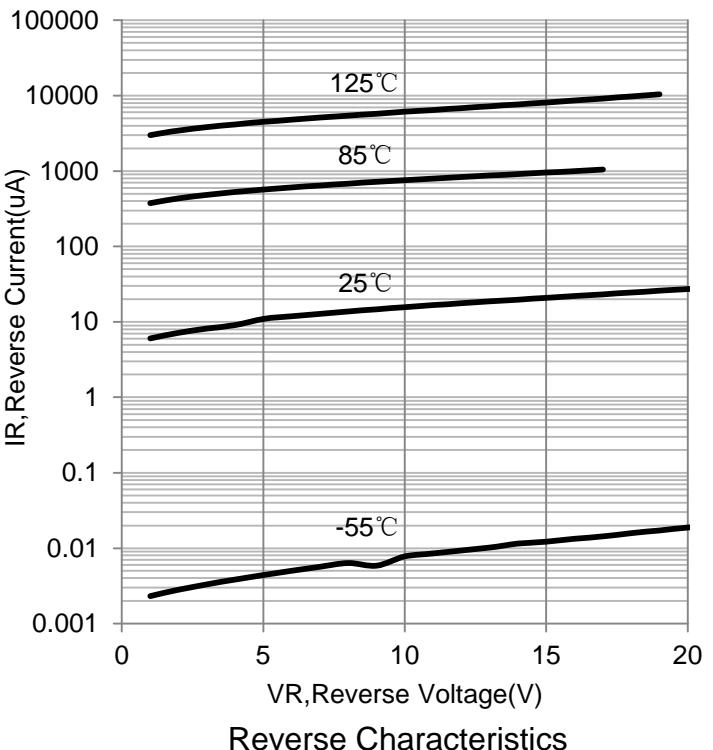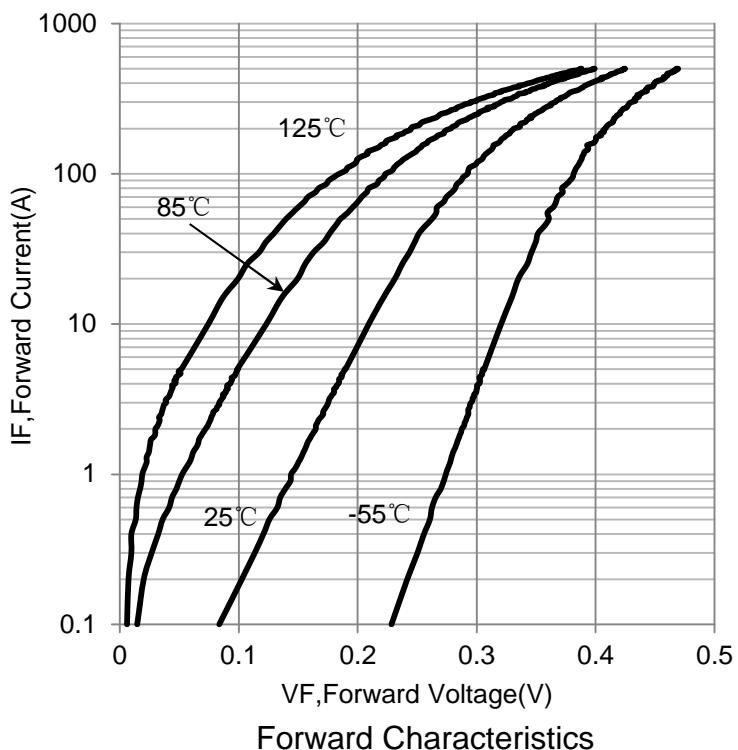

8.OUTLINE AND DIMENSIONS

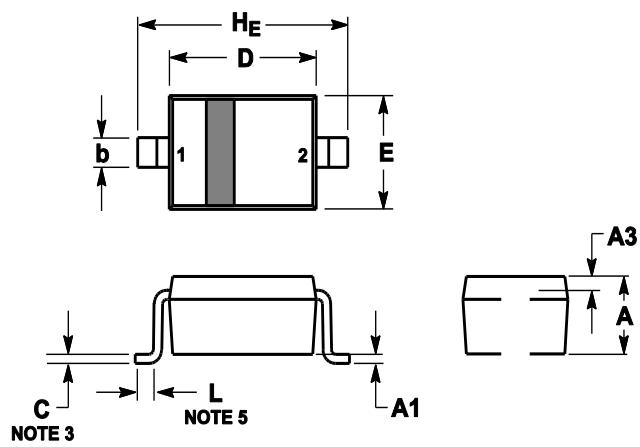


Notes:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.

| DIM | MILLIMETERS | | | INCHES | | |
|-----|-------------|------|-------|----------|-------|-------|
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | 0.8 | 0.9 | 1 | 0.031 | 0.035 | 0.04 |
| A1 | 0 | 0.05 | 0.1 | 0 | 0.002 | 0.004 |
| A3 | 0.15REF | | | 0.006REF | | |
| b | 0.25 | 0.32 | 0.4 | 0.01 | 0.012 | 0.016 |
| C | 0.089 | 0.12 | 0.177 | 0.003 | 0.005 | 0.007 |
| D | 1.6 | 1.7 | 1.8 | 0.062 | 0.066 | 0.07 |
| E | 1.15 | 1.25 | 1.35 | 0.045 | 0.049 | 0.053 |
| L | 0.08 | | | 0.003 | | |
| H_E | 2.3 | 2.5 | 2.7 | 0.09 | 0.098 | 0.105 |

9.SOLDERING FOOTPRINT

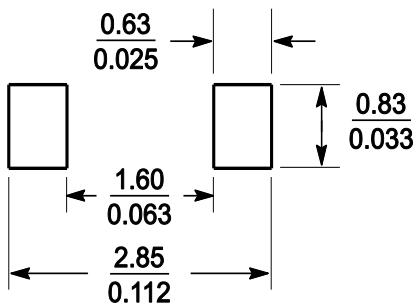

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by Leshan manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS 3010S-02LRH E6327](#)
[BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#)
[SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#)
[MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [BAS 70-02L E6327](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK32A-](#)
[TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#) [NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#)
[CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#)
[CDBQC0530L-HF](#) [BAT54-13-F](#) [ACDBA340-HF](#)