


S-SMDJ*** A Series

SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR
VOLTAGE 5 TO 250 Volts, 3000 Watt Peak Pulse Power

1. FEATURES

- We declare that the material of product compliance with RoHS requirements and Halogen Free.
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications in order to optimize board space
- Low profile package
- Built-in strain relief
- Glass passivated junction
- Low inductance
- Excellent clamping capability
- Repetition Rate (duty cycle): 0.01%
- High temperature soldering guaranteed:
260°C/10 seconds,
- Weight: 0.26g
- S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.

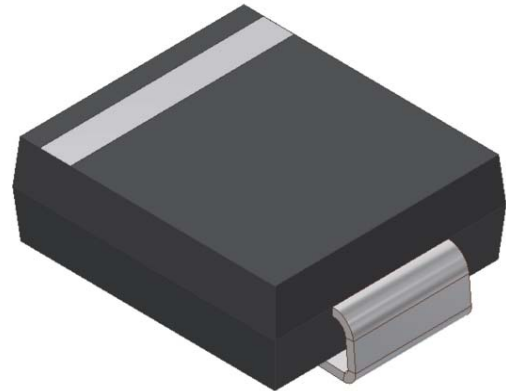

2. MECHANICAL DATA

Case: JEDEC DO-214AB (SMC)

Terminals: Plated leads, solderable per MIL-STD-202, Method 208

Polarity: With Color band denoted cathode

Mounting Position: Any

3. MAXIMUM RATINGS (Ta = 25°C)

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

RATING	Symbol	VALUE	UNITS
Peak Power Dissipation at $T_A=25^\circ\text{C}$, $T_P=1\text{ms}$ (Note 1)	P_{PPM}	Minimum 3000	Watts
Steady State Power Dissipation at $T_L=75^\circ\text{C}$ (Note 2)	$P_{M(AV)}$	6.5	Watts
Peak Forward Surge Current, 8.3ms Single Half Sine-Wave Superimposed on Rated Load, (JEDEC Method)(Note 3)	I_{FSM}	300	A
Typical thermal resistance (Note 2)	R θ JA	80	°C/W
	R θ JC	20	
Operating Temperature Range	TJ	-55 to +150	°C
Storage Temperature Range	TSTG	-55 to +150	°C

NOTES:

1. Non-repetitive current pulse, per Fig. 3 and derated above $T_A=25^\circ\text{C}$ per Fig. 2.
2. Mounted on 0.31 x 0.31" (8.0 x 8.0mm) copper pads to each terminal.
3. 8.3ms single half sine-wave, duty cycle= 4 pulses per minu

S-SMDJ*** A Series

Uni-Directional Part Number	Device marking code	Reverse Stand-off Voltage VRWM (V)	Breakdown Voltage VBR (V) Min. @IT	Breakdown Voltage VBR (V) Max. @IT	Test Current IT (mA)	Maximum Clamping Voltage @IPP VC (V)	Peak Pulse Current Ipp (A)	Reverse Leakage @VRWM IR (uA)
S-SMDJ5.0A	SMDJ5.0A	5.00	6.40	7.00	10.00	9.20	326.1	800
S-SMDJ6.0A	SMDJ6.0A	6.00	6.67	7.37	10.00	10.30	291.3	800
S-SMDJ6.5A	SMDJ6.5A	6.50	7.22	7.98	10.00	11.20	267.9	500
S-SMDJ7.0A	SMDJ7.0A	7.00	7.78	8.60	10.00	12.00	250.0	200
S-SMDJ7.5A	SMDJ7.5A	7.50	8.33	9.21	1.00	12.90	232.6	100
S-SMDJ8.0A	SMDJ8.0A	8.00	8.89	9.83	1.00	13.60	220.6	50
S-SMDJ8.5A	SMDJ8.5A	8.50	9.44	10.40	1.00	14.40	208.3	20
S-SMDJ9.0A	SMDJ9.0A	9.00	10.00	11.10	1.00	15.40	194.8	10
S-SMDJ10A	SMDJ10A	10.00	11.10	12.30	1.00	17.00	176.5	1
S-SMDJ11A	SMDJ11A	11.00	12.20	13.50	1.00	18.20	164.8	1
S-SMDJ12A	SMDJ12A	12.00	13.30	14.70	1.00	19.90	150.8	1
S-SMDJ13A	SMDJ13A	13.00	14.40	15.90	1.00	21.50	139.5	1
S-SMDJ14A	SMDJ14A	14.00	15.60	17.20	1.00	23.20	129.3	1
S-SMDJ15A	SMDJ15A	15.00	16.70	18.50	1.00	24.40	123.0	1
S-SMDJ16A	SMDJ16A	16.00	17.80	19.70	1.00	26.00	115.4	1
S-SMDJ17A	SMDJ17A	17.00	18.90	20.90	1.00	27.60	108.7	1
S-SMDJ18A	SMDJ18A	18.00	20.00	22.10	1.00	29.20	102.7	1
S-SMDJ20A	SMDJ20A	20.00	22.20	24.50	1.00	32.40	92.6	1
S-SMDJ22A	SMDJ22A	22.00	24.40	26.90	1.00	35.50	84.5	1
S-SMDJ24A	SMDJ24A	24.00	26.70	29.50	1.00	38.90	77.1	1
S-SMDJ26A	SMDJ26A	26.00	28.90	31.90	1.00	42.10	71.3	1
S-SMDJ28A	SMDJ28A	28.00	31.10	34.40	1.00	45.40	66.1	1
S-SMDJ30A	SMDJ30A	30.00	33.30	36.80	1.00	48.40	62.0	1
S-SMDJ33A	SMDJ33A	33.00	36.70	40.60	1.00	53.30	56.3	1
S-SMDJ36A	SMDJ36A	36.00	40.00	44.20	1.00	58.10	51.6	1
S-SMDJ40A	SMDJ40A	40.00	44.40	49.10	1.00	64.50	46.5	1
S-SMDJ43A	SMDJ43A	43.00	47.80	52.80	1.00	69.40	43.2	1
S-SMDJ45A	SMDJ45A	45.00	50.00	55.30	1.00	72.70	41.3	1
S-SMDJ48A	SMDJ48A	48.00	53.30	58.90	1.00	77.40	38.8	1
S-SMDJ51A	SMDJ51A	51.00	56.70	62.70	1.00	82.40	36.4	1
S-SMDJ54A	SMDJ54A	54.00	60.00	66.30	1.00	87.10	34.4	1
S-SMDJ58A	SMDJ58A	58.00	64.40	71.20	1.00	93.60	32.1	1
S-SMDJ60A	SMDJ60A	60.00	66.70	73.70	1.00	96.80	31.0	1
S-SMDJ64A	SMDJ64A	64.00	71.10	78.60	1.00	103.00	29.1	1
S-SMDJ70A	SMDJ70A	70.00	77.80	86.00	1.00	113.00	26.5	1
S-SMDJ75A	SMDJ75A	75.00	83.30	92.10	1.00	121.00	24.8	1
S-SMDJ78A	SMDJ78A	78.00	86.70	95.80	1.00	126.00	23.8	1
S-SMDJ85A	SMDJ85A	85.00	94.40	104.00	1.00	137.00	21.9	1
S-SMDJ90A	SMDJ90A	90.00	100.00	111.00	1.00	146.00	20.5	1
S-SMDJ100A	SMDJ100A	100.00	111.00	123.00	1.00	162.00	18.5	1
S-SMDJ110A	SMDJ110A	110.00	122.00	135.00	1.00	177.00	16.9	1
S-SMDJ120A	SMDJ120A	120.00	133.00	147.00	1.00	193.00	15.5	1
S-SMDJ130A	SMDJ130A	130.00	144.00	159.00	1.00	209.00	14.4	1
S-SMDJ150A	SMDJ150A	150.00	167.00	185.00	1.00	243.00	12.3	1
S-SMDJ160A	SMDJ160A	160.00	178.00	197.00	1.00	259.00	11.6	1
S-SMDJ170A	SMDJ170A	170.00	189.00	209.00	1.00	275.00	10.9	1
S-SMDJ180A	SMDJ180A	180.00	198.00	221.00	1.00	291.00	10.3	1
S-SMDJ190A	SMDJ190A	190.00	209.00	233.00	1.00	307.00	9.8	1
S-SMDJ200A	SMDJ200A	200.00	220.00	246.00	1.00	324.00	9.3	1
S-SMDJ220A	SMDJ220A	220.00	246.00	272.00	1.00	356.00	8.4	1
S-SMDJ250A	SMDJ250A	250.00	279.00	309.00	1.00	405.00	7.4	1

5. ELECTRICAL CHARACTERISTICS CURVES

Fig. 1-Peak Pulse Power Rating Curve

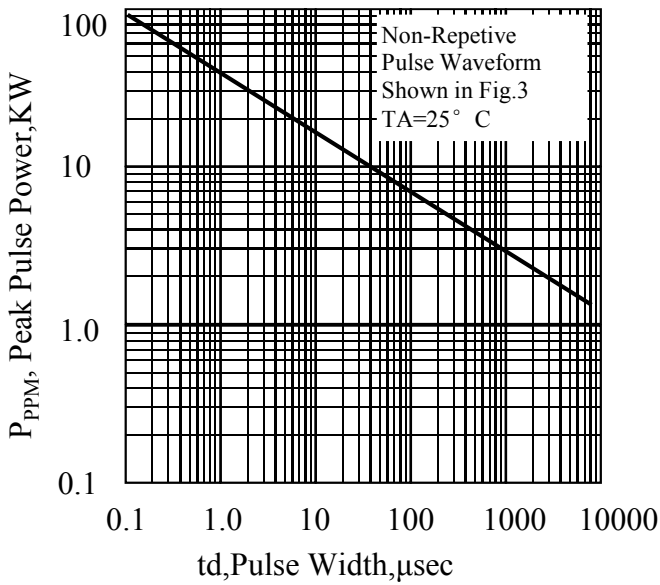


Fig. 2-Pulse Derating Curve

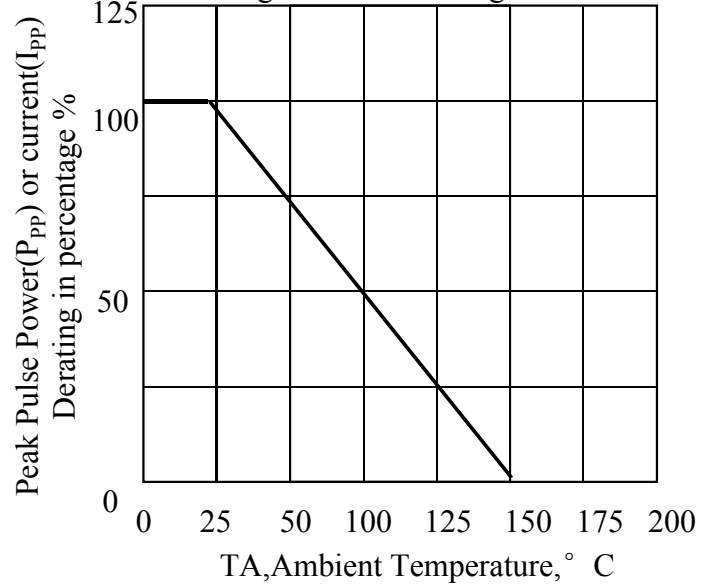


Fig. 3-Pulse Waveform

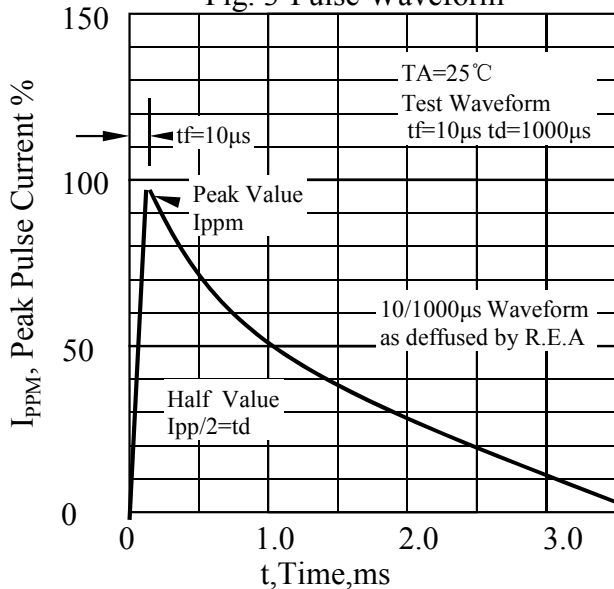


Fig. 4-Typical Junction Capacitance



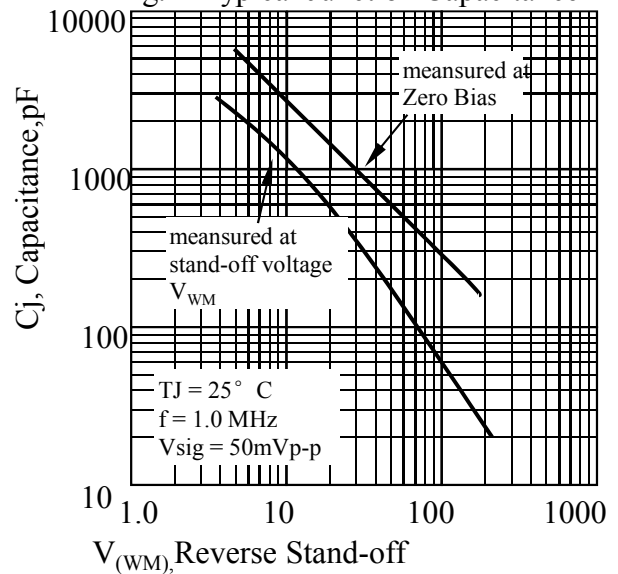


Fig. 5 - Maximum Non-repetitive Peak Forward Surge Current

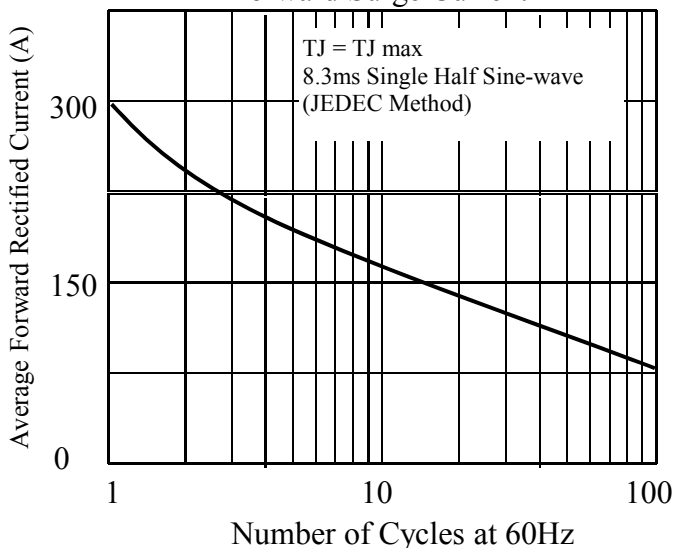


6. OUTLINE AND DIMENSIONS

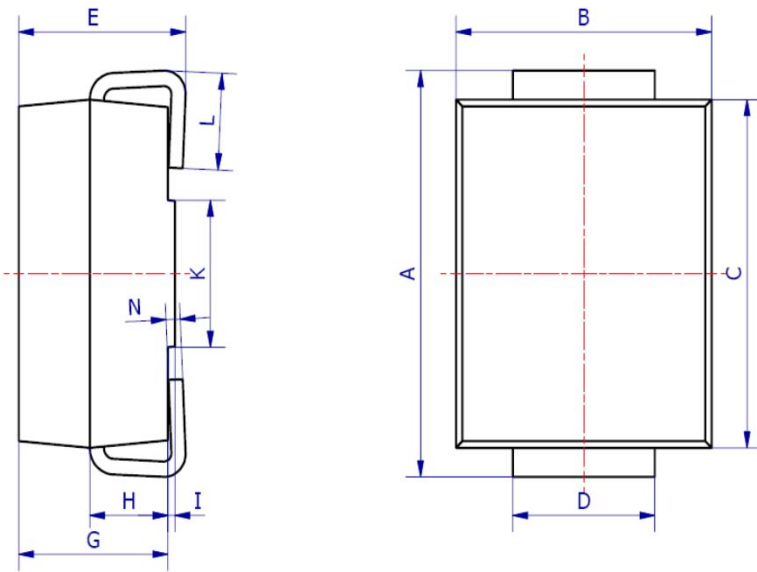

SMC			
DIM	Min	Max	Typ.
A	7.70	8.30	8.00
B	5.85	6.25	6.05
C	6.65	7.05	6.85
D	2.80	3.20	3.00
E	2.45	2.85	2.65
G	2.10	2.50	2.30
H	1.00	1.40	1.20
I	0.05	0.15	0.10
K	4.30	4.70	4.50
L	1.00	1.50	1.25
N	0.10	0.30	0.20
All Dimensions in mm			

7. SOLDERING FOOTPRINT

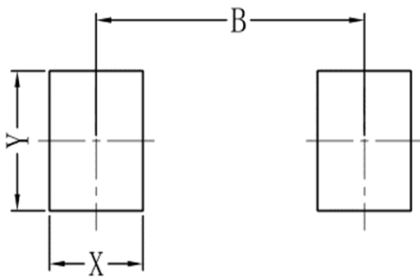

SMC	
DIM	(mm)
X	1.60
Y	3.30
B	6.60

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Leshan](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)
[ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)