

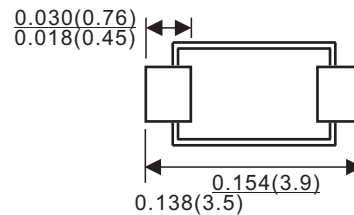




SOD-123FL

Features

- ◇ Batch process design, excellent power dissipation offers better reverse leakage current and thermal resistance.
- ◇ Low profile surface mounted application in order to optimize board space.
- ◇ Tiny plastic SMD package.
- ◇ High current capability.
- ◇ High surge capability.
- ◇ Glass passivated chip junction.

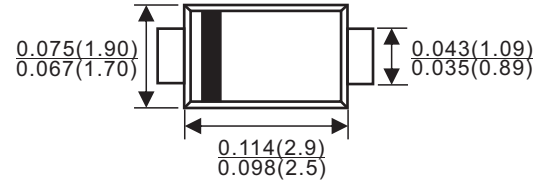

Dimensions in inches and (millimeters)

Mechanical data

- ◇ Case : Molded plastic, SOD-123FL
- ◇ Polarity : Indicated by cathode band
- ◇ Mounting Position : Any
- ◇ Weight : Approximated 0.01gram

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Maximum ratings

		A1	A2	A3	A4	A5	A6	A7	UNITS
Device marking code		LGEA1	LGEA2	LGEA3	LGEA4	LGEA5	LGEA6	LGEA7	
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current @ $T_A=75$	$I_{(AV)}$	1.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I_{FSM}	25							A
Maximum instantaneous forward voltage @ $I_{FM}=1.0A$ (Note 1)	V_F	1.1							V
Maximum DC reverse current @ $T_A=25$ at rated DC blocking voltage @ $T_A=125$	I_R	5.0 50							μA
Typical junction capacitance measured at $f=1MHz, V_R=4.0V$	C_J	15							p F
Typical thermal resistance junction to lead	$R_{\theta JL}$	20							/W
Operating temperature range	T_j	- 55 --- + 150							
Storage temperature range	T_{STG}	- 55 --- + 150							

 NOTE1.Pulse test: pulse width 300 μ sec,duty cycle 2%.

Rating and characteristic curves (A1 THRU A7)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

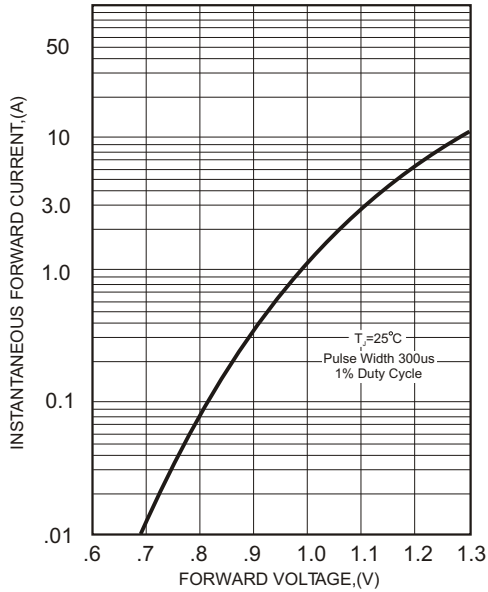


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

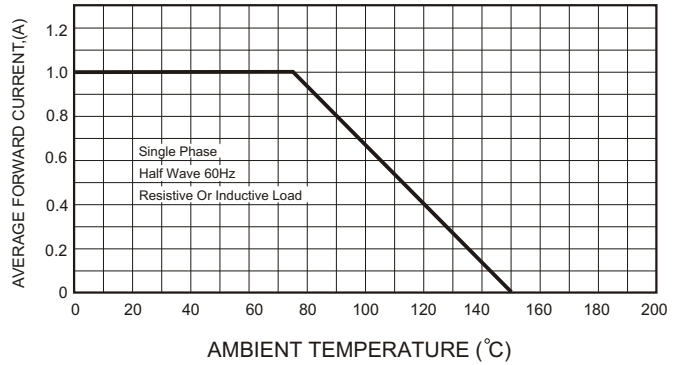


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

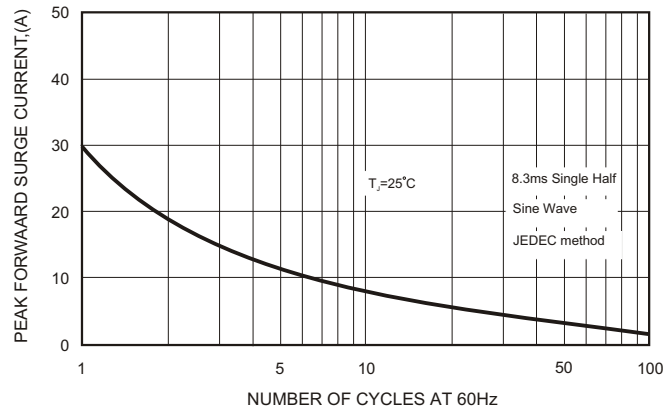


FIG.3 - TYPICAL REVERSE CHARACTERISTICS


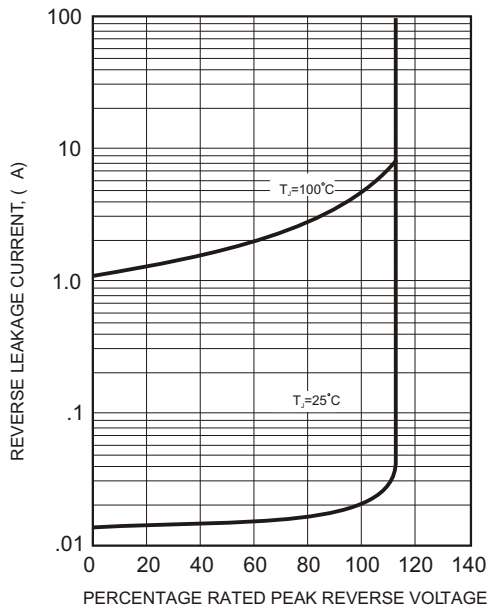


FIG.5-TYPICAL JUNCTION CAPACITANCE

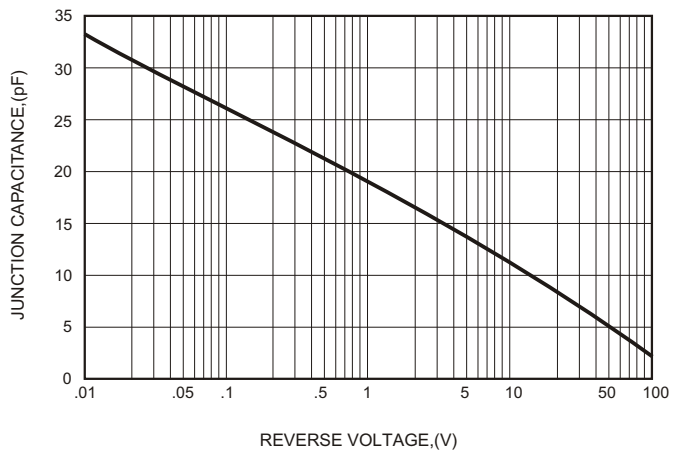

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
SOD-123FL	3000/REEL	90000	40X20X22	5.00	4.00

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [LGE manufacturer:](#)

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#) [1SS400CST2RA](#)
[SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#) [1SS226-TP](#) [RFUH20TB3S](#)
[D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-GS18](#) [053684A](#)
[SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV199E6433HTMA1](#) [BAS28-7](#)
[BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#)
[BAV99HDW-13](#) [NTE6250](#) [NTE582-4](#) [NTE582-6](#) [MMDB30-E28X](#)