

## SOT-23




### Features

- ◇ Low turn-on voltage
- ◇ Fast switching
- ◇ PN junction guard Ring for transient

### Mechanical Data

- ◇ Case: SOT-23, Molded plastic
- ◇ Weight: 0.008 grams

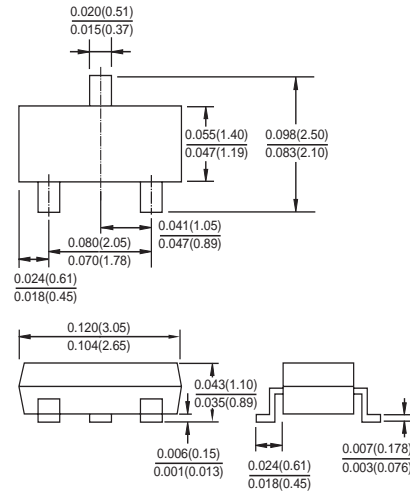

### Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise specified

Type Number	Symbol	BAS70	Units
Peak Repetitive Reverse Voltage	VRRM	70	V
Working Peak Reverse Voltage	VRWM		
DC Blocking Voltage	VR		
RMS Reverse Voltage	VR(RMS)	49	V
Forward Continuous Current (Note 1)	IF	70	mA
Non-Repetitive Peak Forward Surge Current @ $t \leq 1.0\text{s}$	IFSM	100	mA
Power Dissipation (Note 1)	Pd	200	mW
Thermal Resistance Junction to Ambient Air (Note 1)	$R_{\theta JA}$	625	K/W
Operating Junction Temperature Range	$T_J$	-55 to +125	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150	$^\circ\text{C}$

### Electrical Characteristics

Type Number	Symbol	Min	Max	Units
Reverse Breakdown Voltage (Note 2), $I_R=10\mu\text{A}$	V(BR)	70		
Reverse Leakage Current $t_p < 300\mu\text{s}$ , $V_R=50\text{V}$	$I_R$	-	100	nA
Forward Voltage Drop $t_p=300\mu\text{s}$ , $I_F=1.0\text{mA}$ $t_p < 300\mu\text{s}$ , $I_F=15\text{mA}$	$V_F$	-	410 1000	mV
Junction Capacitance $V_R=0$ , $f=1.0\text{MHz}$	$C_j$	-	2.0	pF
Reverse Recovery Time (Note 3)	trr	-	5.0	nS

- Notes:
1. Valid Provided that Terminals are Kept at Ambient Temperature.
  2. Test Period < 3000 $\mu\text{s}$ .
  3. Reverse Recovery Test Conditions:  $I_F=I_R=10\text{mA}$ ,  $I_{rr}=1.0\text{mA}$ ,  $R_L=100\Omega$ .

## RATINGS AND CHARACTERISTIC CURVES (BAS70 / -04 / -05 / -06)

FIG.1- POWER DERATING CURVE

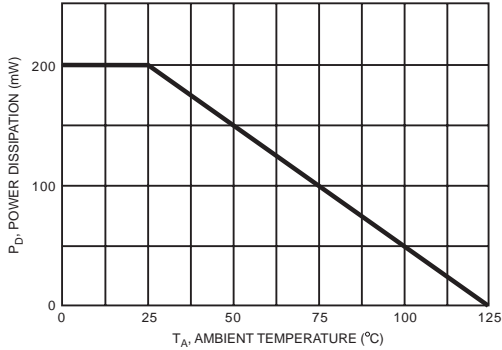


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

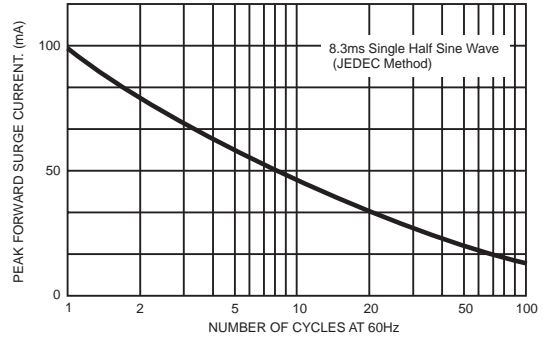


FIG.3- TYPICAL FORWARD CHARACTERISTICS

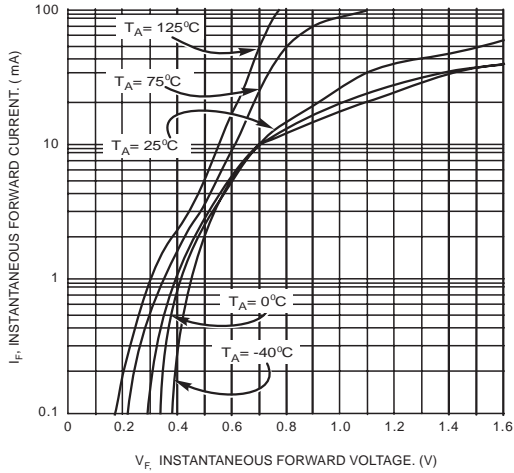


FIG.4- TYPICAL REVERSE CHARACTERISTICS

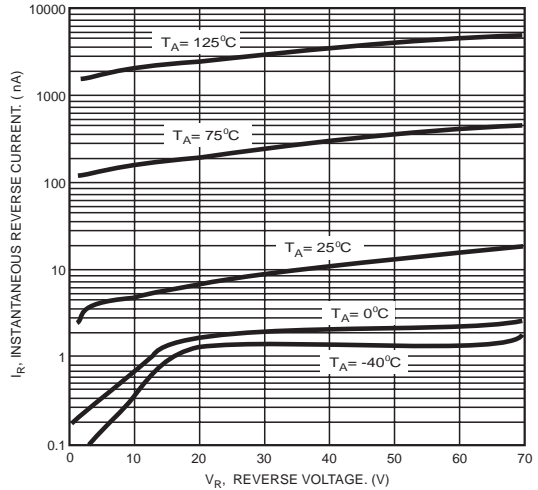


FIG.5- TYPICAL TOTAL CAPACITANCE VS REVERSE VOLTAGE


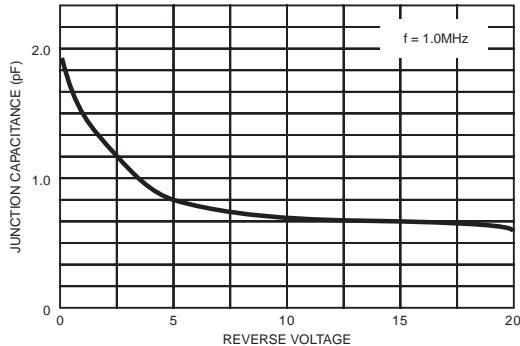


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

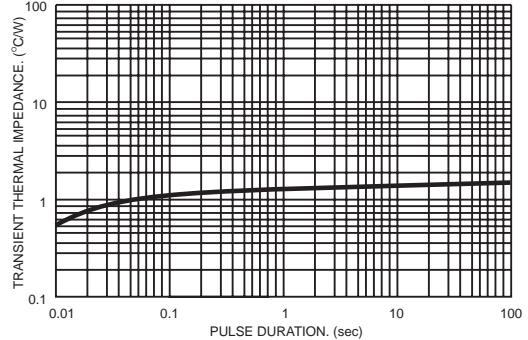

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
SOT-23	3000/REEL	90000	40X20X22	5.00	4.00

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [LGE](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#)  
[BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#)  
[NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#)  
[CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [JANTX1N5712-1](#) [SB007-03C-TB-E](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#)  
[NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#)  
[ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [10BQ060-M3/5BT](#)  
[NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#) [1N5819T-G](#) [B0530WSQ-7-F](#)