

DB-1		
Dim	Min	Max
A	8.20	8.60
B	6.10	6.50
C	2.35	2.65
E	0.15	0.35
F	5.40	6.00
I	0.35	0.65
J	8.40	9.00
K	4.80	5.20
L	7.65	8.15
All Dimensions in mm		

FEATURES

- Rating to 1000V PRVP
- Surge overload rating to 30 Amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- Lead solderable per MIL-STD-202 method 208
- Glass passivated chip junctions
- Plastic material has UL flammability classification 94V-0

Maximum Ratings (@T_A = 25°C unless otherwise specified)

Characteristic	Symbol	DB101	DB102	DB103	DB104	DB105	DB106	DB107	UNITS
Peak Repetitive Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
RMS Reverse Voltage	V _{RMS}	35	75	140	280	420	560	700	V
DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward Output current @T _A =40°C	I _{F(AV)}	1.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I _{FSM}	30							A
I ² t Rating for fusing @T _j =25°C	I ² t	3.7							A ² S

Thermal Characteristics

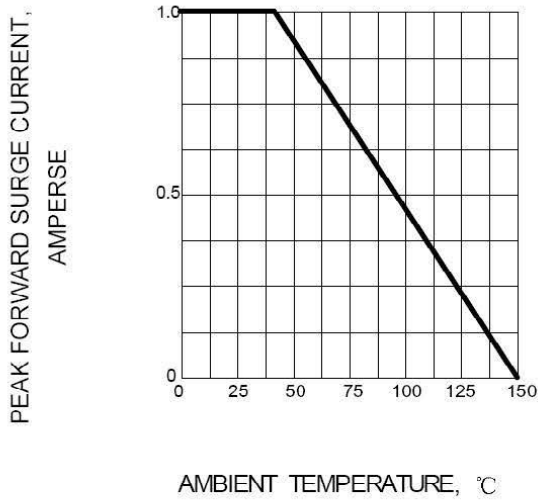
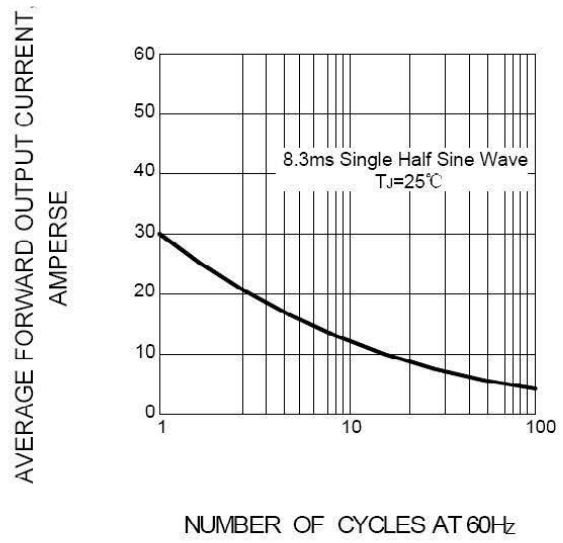
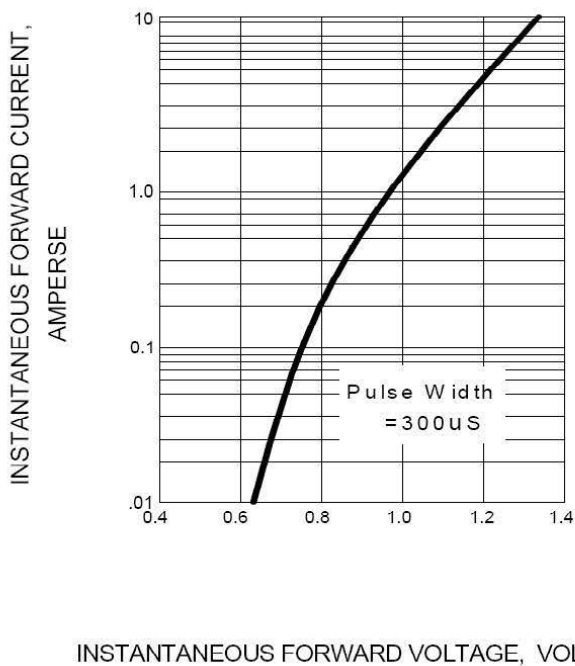
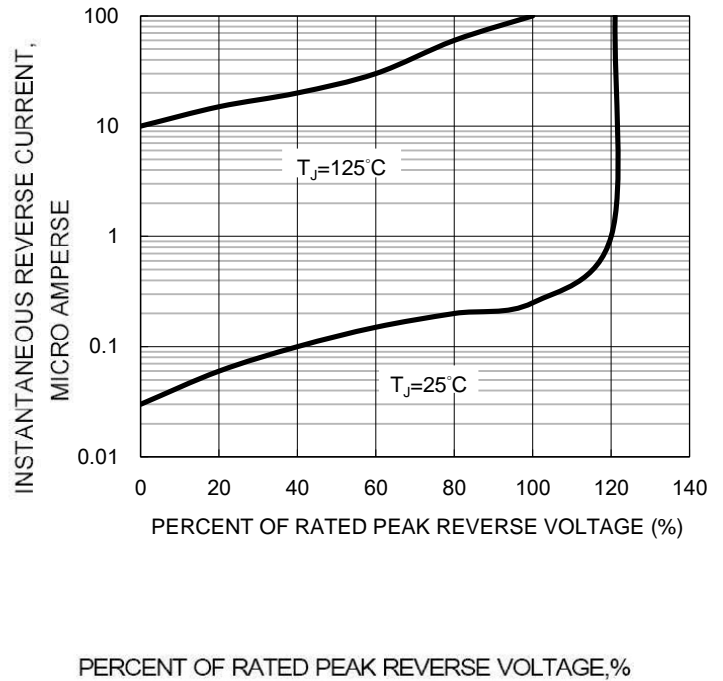
Characteristic	Symbol	DB101	DB102	DB103	DB104	DB105	DB106	DB107	UNITS
Typical thermal resistance per leg (Note1)	R _{θJA}	66							°C/W
	R _{θJC}	28							
	R _{θJL}	27							
Operating junction temperature range	T _J	- 55 ---- + 150							°C
Storage temperature range	T _{STG}	- 55 ---- + 150							°C

Electrical Characteristics (@T_A = 25°C unless otherwise specified)

Characteristic	Symbol	DB101	DB102	DB103	DB104	DB105	DB106	DB107	UNITS
Maximum instantaneous forward voltage at 1.0 A	V _F	1.1							V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =100°C	I _R	5							μ A
		0.5							mA

Note:

1. Device mounted on PCB with 10 mm x 20 mm x 0.1mm copper pad areas

FIG.1 – TYPICAL FORWARD CURRENT DERATING CURVE

FIG.2 – MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

FIG.3 – TYPICAL FORWARD CHARACTERISTIC

FIG.4 – TYPICAL REVERSE CHARACTERISTIC


Device	Package	Shipping
DB101-DB107	DB-1	50unit/pipe

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [LGE manufacturer:](#)

Other Similar products are found below :

[MMBD3004S-13-F](#) [1N3611](#) [NTE156A](#) [NTE6244](#) [1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [1N4449](#) [1N456A](#) [1N914BTR](#)
[D291S45T](#) [BAS 16-02L E6327](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#)
[IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [SMMSD4148T3G](#) [BYW95B/A52A](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [BAV70HDW-7](#)
[BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [1SS388-TP](#) [BAV99TQ-13-F](#) [BAV99HDW-13](#) [1N4004](#)
[MMDB30-E28X](#) [LS4148](#) [IDV15E65D2](#) [W0503RH200S0L](#) [M0268SJ200NLF](#) [M0268RJ200NLF](#) [S3MBF](#) [US1J](#) [DAN217U-TP](#) [SHV-06JNS-](#)
[Q](#) [IDW30C65D1](#) [IDW80C65D1](#) [VS-HFA30TA60CSR-M3](#) [M1MA152WAT1](#) [MMSD71RKT1G](#)