



**SMC/DO-214AB**

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal-Silicon Junction
- For surface mount applications
- Guard ring for over voltage protection
- High forward surge current capability
- Super Low forward voltage
- High temperature soldering guaranteed: 260°C/10 seconds at terminals

## MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-750 method 2026
- Mounting position: Surface Mounted
- Weight: 0.007 ounce, 0.25 grams

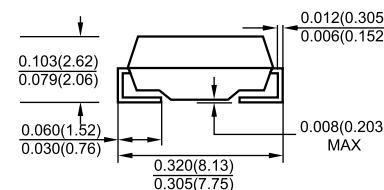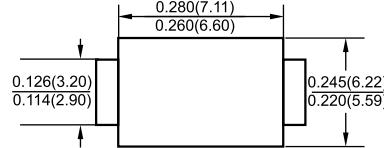

Dimensions in inches and (millimeters)



## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%


	SYMBOLS	ES5A	ES5B	ES5D	ES5G	ES5J	ES5K	ES5M	UNIT
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	720	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current	I <sub>(AV)</sub>				5.0				Amp
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I <sub>FSM</sub>				150				Amps
Maximum Instantaneous Forward Voltage at 5.0A (Note 1)	V <sub>F</sub>		0.95		1.25		1.68		Volts
Maximum DC Reverse Current at rated DC Blocking Voltage	T <sub>A</sub> = 25°C	I <sub>R</sub>			5				u A
	T <sub>A</sub> = 100°C				100				
Maximum reverse recovery time(Note 2)	T <sub>rr</sub>			35					ns
Operating Temperature Range	T <sub>J</sub>			-55 to +150					°C
Storage Temperature Range	T <sub>STG</sub>			-55 to +150					°C

**Notes:**


1. Pulse test: 300μs pulse width, 1% duty cycle
2. Test conditions : IF=0.5A,IR=1.0A,IRR=0.25A

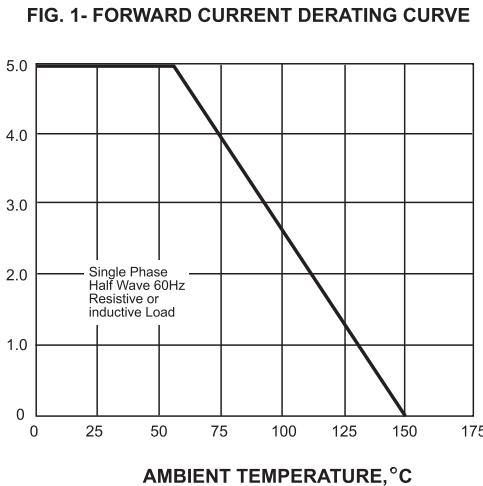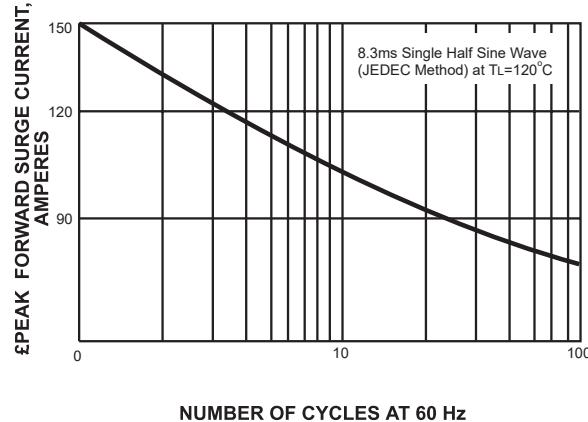AVERAGE FORWARD RECTIFIED CURRENT,  
AMPERES

**FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

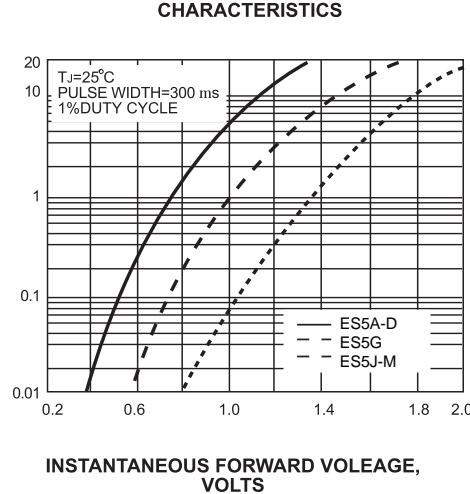
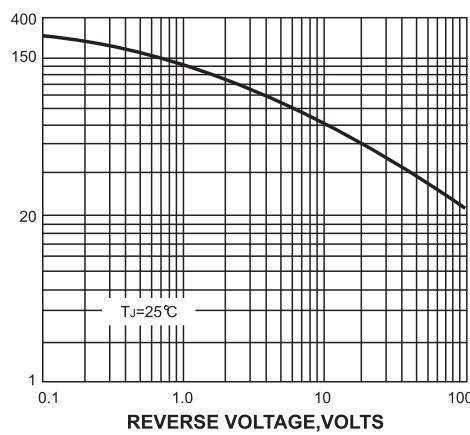
INSTANTANEOUS FORWARD CURRENT, AMPERES

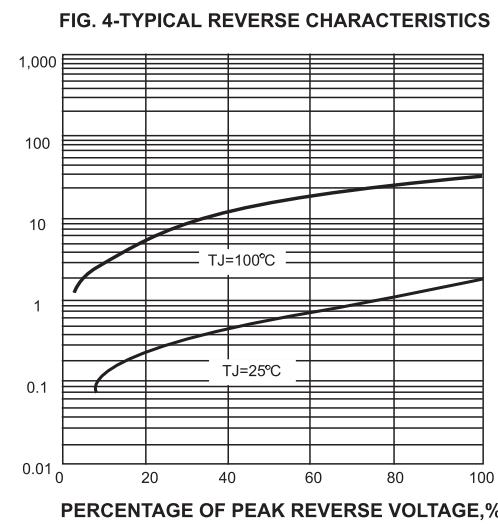


INSTANTANEOUS REVERSE CURRENT, MICROAMPERES



JUNCTION CAPACITANCE, pF



TRANSIENT THERMAL IMPEDANCE, °C/W

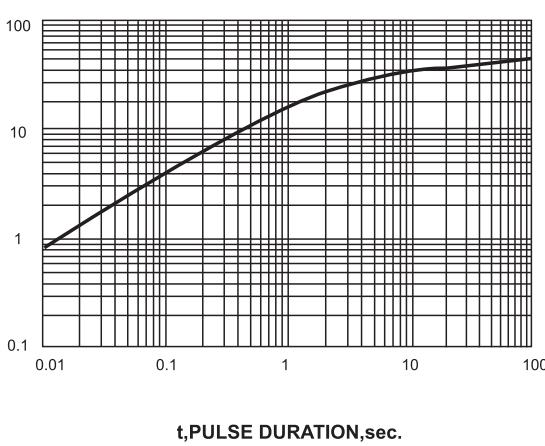

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Rectifiers category:***

***Click to view products by LGE manufacturer:***

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [1N4002G](#) [1N4005-TR](#) [UFS120Je3/TR13](#) [JANS1N6640US](#) [481235F](#)  
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T110HF60](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS12\(T5L,TEMQ\)](#) [ACGRB207-HF](#)  
[CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [85HFR60](#) [40HFR60](#) [70HF120](#) [85HFR80](#)  
[D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SDHD5K](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE6358](#)  
[NTE5850](#) [NTE5819](#) [NTE5837](#) [NTE5892](#) [NTE5900](#) [NTE5911](#) [NTE5915](#) [NTE5921](#) [NTE6104](#)