



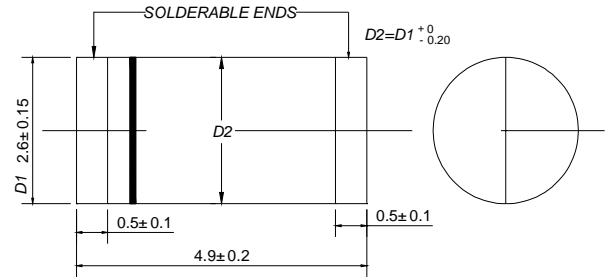
VOLTAGE RANGE: 50 --- 1600 V

CURRENT: 1.0 A

DO - 213AB

Features

- ✧ Plastic package has underwriters laboratories flammability classification 94V-0
- ✧ Glass passivated chip junction
- ✧ For surface mount applications
- ✧ High temperature metallurgically bonded construction
- ✧ Cavity-free glass passivated junction
- ✧ High temperature soldering guaranteed:450 °C/5 seconds at terminals.Complete device sub-mersible temperature of 265 °C for 10 seconds in solder bath



Dimensions in millimeters

Mechanical Data

- ✧ Case: JEDEC DO-213AB,molded plastic
- ✧ Polarity: Color band denotes cathode
- ✧ Weight: 0.0046 ounces, 0.116 grams
- ✧ Mounting position: Any

Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

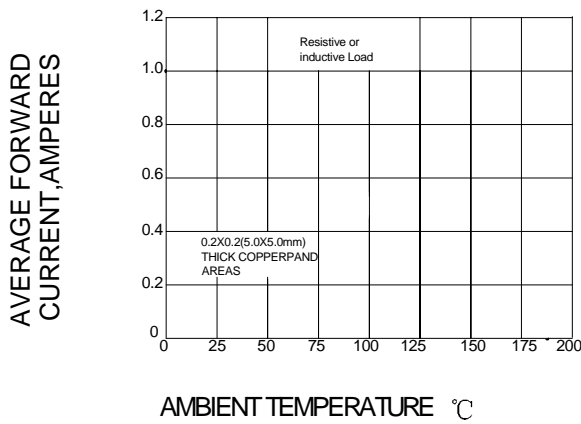
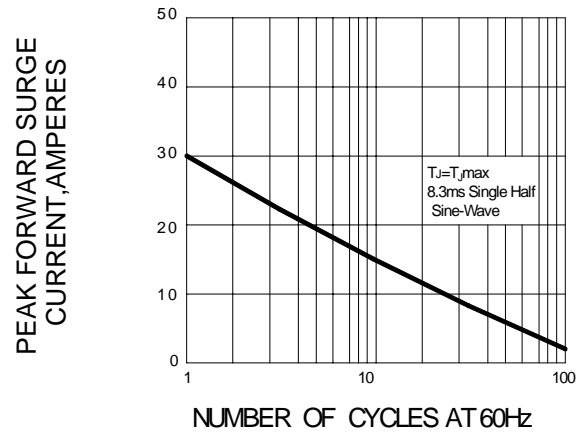
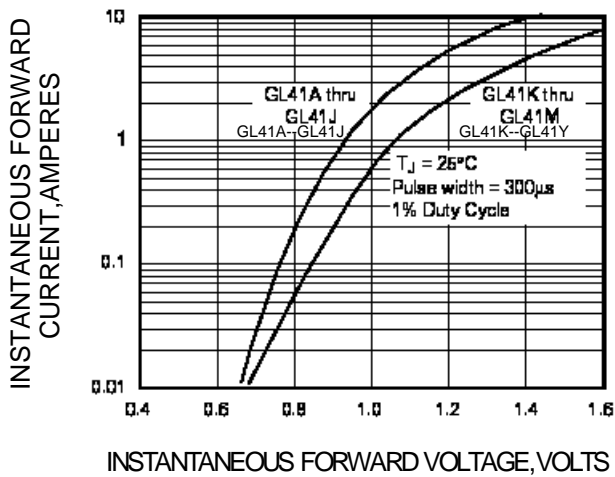
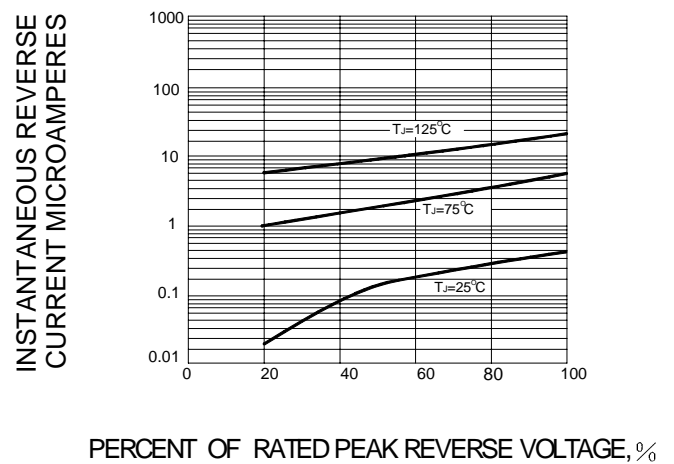
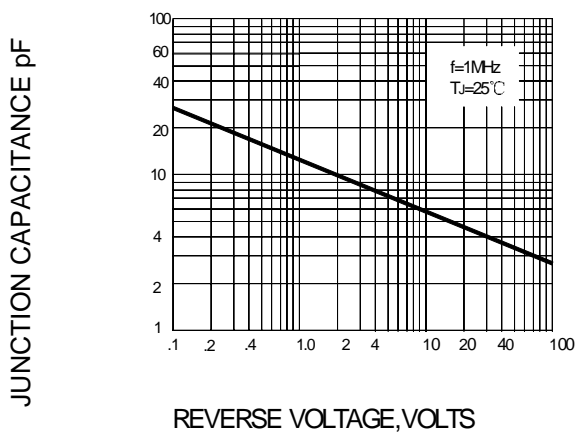
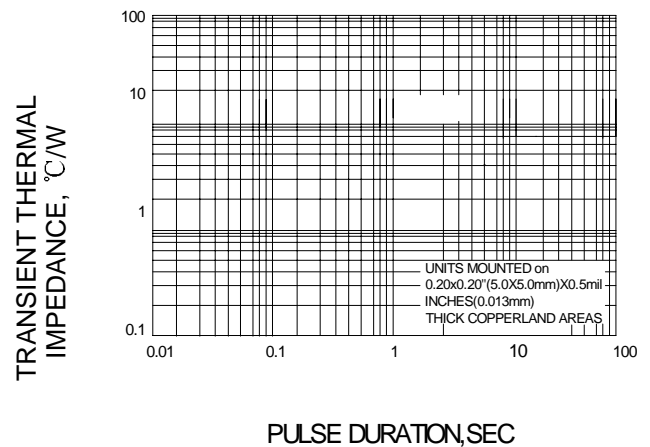
Single phase,half wave,60 Hz,resistive or inductive load. For capacitive load,derate current by 20%.

		GL 41A	GL 41B	GL 41D	GL 41G	GL 41J	GL 41K	GL 41M	GL 41T	GL 41Y	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	1300	1600	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	910	1120	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	1300	1600	V
Maximum average forward rectified current (see FIG.1)	$I_{(AV)}$	1.0									A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30									A
Maximum instantaneous forward voltage @1.0A	V_F	1.1			1.2						V
Maximum reverse current @ $T_A=25^{\circ}C$ at rated DC blocking voltage @ $T_A=125^{\circ}C$	I_R					10					μA
Typical junction capacitance (Note1)	C_j					8.0					pF
Typical thermal resistance (Note 2)	$R_{\theta JA}$					75					$^{\circ}C/W$
Operating junction temperature range	T_j					- 55 ---- +175					$^{\circ}C$
Storage temperature range	T_{STG}					- 55 ---- +175					$^{\circ}C$

NOTE: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Thermal resistance from junction to ambient, 0.24×0.24"(6.0×6.0mm) copper pads to each terminal.

Ratings AND Characteristic Curves

FIG.1 – FORWARD DERATING CURVE

FIG.2 PEAK FORWARD SURGE CURRENT

FIG.3 – TYPICAL FORWARD CHARACTERISTICS

FIG.4 – TYPICAL REVERSE CHARACTERISTICS

FIG.5-TYPICAL JUNCTION CAPACITANCE

FIG.6-TRANSIENT THERMAL IMPEDANCE


PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
DO-213AB	5000/REEL	80000	36.0X35.8X36.5	18.00	16.00

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):

Click to view products by [LGE manufacturer](#):

Other Similar products are found below :

[MMBD3004S-13-F](#) [1N3611](#) [NTE156A](#) [NTE6244](#) [1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [1N4449](#) [1N456A](#) [1N914BTR](#)
[D291S45T](#) [BAS 16-02L E6327](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#)
[MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [SMMSD4148T3G](#) [BYW95B/A52A](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#)
[BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [1SS388-TP](#) [BAV99TQ-13-F](#)
[BAV99HDW-13](#) [1N4004](#) [MMDB30-E28X](#) [LS4148](#) [IDV15E65D2](#) [W0503RH200S0L](#) [M0268SJ200NLF](#) [M0268RJ200NLF](#) [S3MBF](#) [US1J](#)
[DAN217U-TP](#) [SHV-06JNS-Q](#) [IDW30C65D1](#) [IDW80C65D1](#) [VS-HFA30TA60CSR-M3](#) [M1MA152WAT1](#)