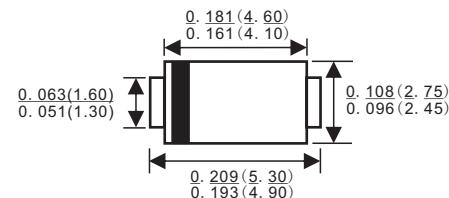



VOLTAGE RANGE: 50 ---- 1000V
CURRENT: 1.0 A

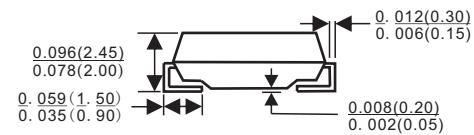
Features

- ◊ For surface mounted applications
- ◊ Low leakage
- ◊ Low forward voltage drop
- ◊ High current capability
- ◊ Easily cleaned with Alcohol,Isopropnol and similar solvents
- ◊ The plastic material carries U/L recognition 94V-0

SMA/DO-214AC


Mechanical Data

- ◊ Case: JEDEC DO-214AC,molded plastic
- ◊ Terminals: Solder plated, solderable per MIL- STD-202,Method 208
- ◊ Polarity: Color band denotes cathode end
- ◊ Weight: 0.002 ounces, 0.064 grams
- ◊ Mounting position: Any



Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

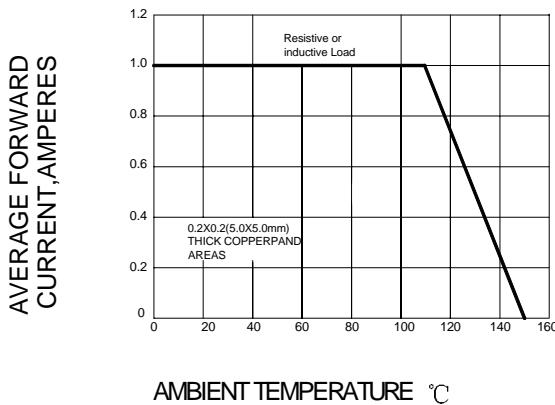
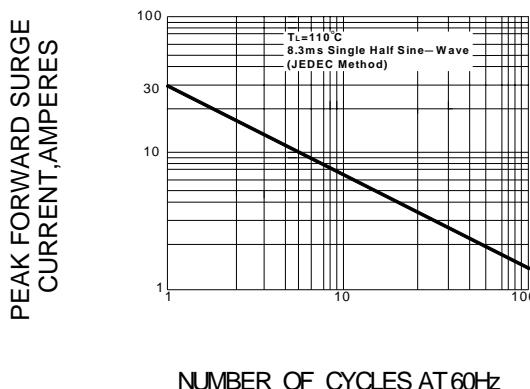
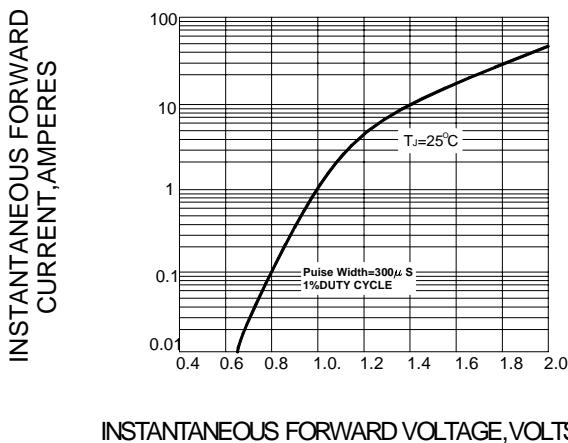
Single phase,half wave,60 Hz,resistive or inductive load. For capacitive load,derate by 20%.

		GS1A	GS1B	GS1D	GS1G	GS1J	GS1K	GS1M	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current @ $T_L=110^\circ\text{C}$	$I_{(AV)}$	1.0						A	
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load $T_J=125^\circ\text{C}$	I_{FSM}	30						A	
Maximum instantaneous forward voltage at 1.0 A	V_F	1.1						V	
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=100^\circ\text{C}$	I_R	5.0 50						μA	
Typical junction capacitance (Note1)	C_J	15						pF	
Typical thermal resistance (Note2)	$R_{\theta JA}$	75						$^\circ\text{C}/\text{W}$	
Operating temperature range	T_J	- 55 --- + 150						$^\circ\text{C}$	
Storage temperature range	T_{STG}	- 55 --- + 150						$^\circ\text{C}$	

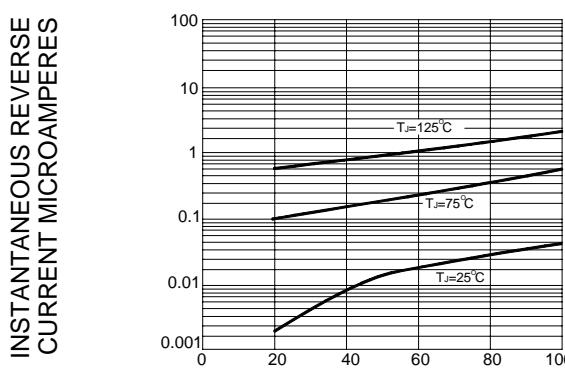
NOTE: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Thermal resistance from junction to ambient

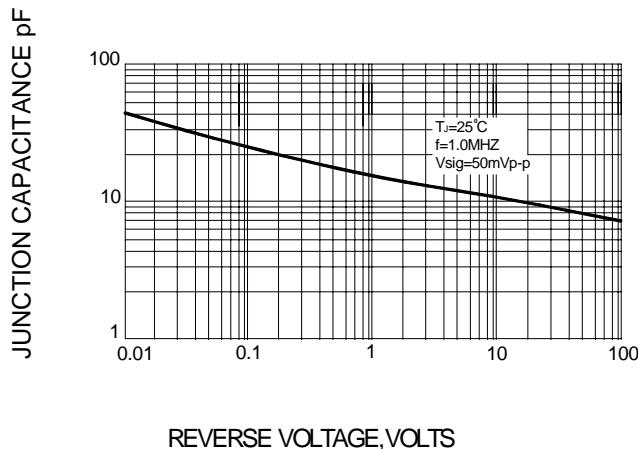
Ratings AND Characteristic Curves

FIG.1 – FORWARD DERATING CURVE

FIG.2 PEAK FORWARD SURGE CURRENT

FIG.3 – TYPICAL FORWARD CHARACTERISTICS


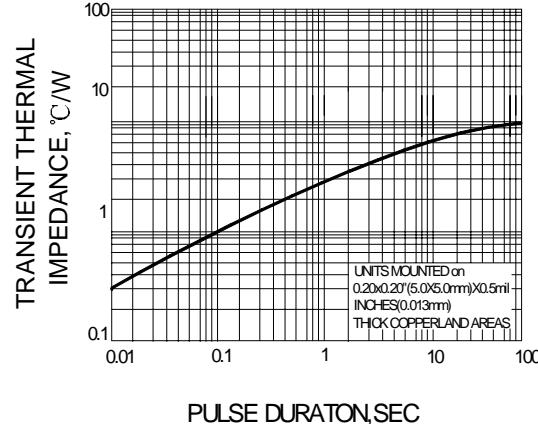
INSTANTANEOUS FORWARD VOLTAGE, VOLTS

FIG.4 – TYPICAL REVERSE CHARACTERISTICS


PERCENT OF RATED PEAK REVERSE VOLTAGE, %

FIG.5-TYPICAL JUNCTION CAPACITANCE


REVERSE VOLTAGE, VOLTS

FIG.6-TRANSIENT THERMAL IMPEDANCE


PULSE DURATION, SEC

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
SMA	5000/REEL	80000	36X30.6X31	12.00	11.00

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by LGE manufacturer:

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [DSE010-TR-E](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#)
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [FC903-TR-E](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#)
[1SS226-TP](#) [RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-GS18](#) [053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV199E6433HTMA1](#)
[BAS28-7](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#)
[NTE6250](#) [NTE582-4](#) [NTE582-6](#)