



## Features

- ◇ Trench Schottky Barrier technology
- ◇ Ultra low forward voltage drop
- ◇ Low power loss,high efficiency
- ◇ Excellent low reverse leakages
- ◇ Excellent high temperature stability
- ◇ High current capability
- ◇ High forward surge capability
- ◇ Lead free finish ,Rohs and WEEE compliant.

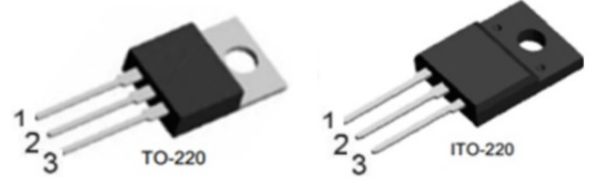


## Applications

- ◇ Switching diode
- ◇ Switching mode power supply(SMPS)
- ◇ DC/DC converter
- ◇ LED lighting
- ◇ Adapter for notebook and game station

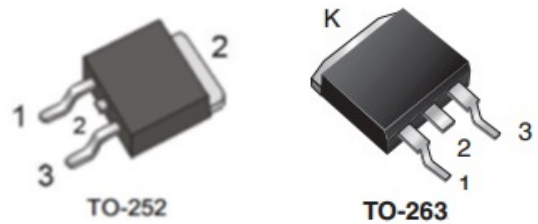

## Mechanical Data

- ◇ Moisture Sensitivity: MSL Level 1,per J-STD-020
- ◇ Terminals:Matte Tin Finish.  
Solderable per MIL-STD-202 Method 208
- ◇ Case Material: Molded Plastic;  
Molding compound meet UL Flammability Classification Rating 94V-0
- ◇ Case:JEDEC TO-220AB,ITO-220AB,TO-252,TO-263



## MAXIMUM RATING

Ratings at 25°C ambient temperature unless otherwise specified.

PARAMETER	SYMBOL	VALUE	UNITS	
Maximum repetitive peak reverse voltage	$V_{RRM}$	100	V	
Maximum RMS voltage	$V_{RWS}$	70	V	
Maximum DC blocking voltage	$V_{DC}$	100	V	
Maximum average forward rectified current	$I_{F(AV)}$	30	A	
per device Per diode		15		
Peak forward surge current 8.3ms half-sine-wave	$I_{FSM}$	250	A	
$I^2t$ Rating for Fusing( $t < 8.3ms$ )	$I^2t$	259	$A^2s$	
Typical Thermal Resistance	TO-220AB	$R_{\theta JA}$	23	$^{\circ}C/W$
		$R_{\theta JC}$	2.5	$^{\circ}C/W$
		$R_{\theta JL}$	3.0	$^{\circ}C/W$
	ITO-220AB	$R_{\theta JC}$	4.5	$^{\circ}C/W$
	TO-252	$R_{\theta JC}$	2.5	$^{\circ}C/W$
TO-263	$R_{\theta JC}$	2.5	$^{\circ}C/W$	
Typical junction capacitance: $V_R=4.0v, f=1MHz$	$C_J$	620	pF	
Junction temperature	$T_J$	150	$^{\circ}C$	
Storage temperature range	$T_{STG}$	-55~150	$^{\circ}C$	



**MBR30100LCT/MBRF30100LCT**  
**MBR30100LDT/MB30100LMT**

Low VF Trench Schottky Rectifiers



**ELELTRICAL CHARACTERISTICS**

PARAMETER	TEST CONDITIONS	SYMBOL	VALUE			UNITS	
			Min	Typ	Max		
Breakdown voltage per diode(min)	IR=0.5mA	V <sub>BR</sub>	100	-	-	V	
Instantaneous forward voltage	IF=15A per Ige	TA= 25°C	VF	-	0.70	0.72	V
		TA= 100°C	VF	-	0.68	-	V
		TA= 125°C	VF	-	0.67	-	V
	IF=5A per Ige	TA= 25°C	VF	-	0.50	0.52	V
		TA= 100°C	VF	-	0.48	-	V
		TA= 125°C	VF	-	0.47	-	V
Maximum DC reverse current @Rated DC Blocking Vlotage	TA= 25°C	IR	-	10	50	μ A	
	TA=125°C	IR	-	-	20000	μ A	

**ODERING PACK INFORMATION**

Part No.	Package	Pcking	Box Size L×W×H(mm)	Quatity(pcs/box)	Carton Size L×W×H(mm)	Quatity(pcs/carton)
MBR30100LCT	TO-220	50pcs/Tube	558×148×38	1000	565×225×170	5000
MBRF30100LCT	ITO-220	50pcs/Tube	558×148×38	1000	565×225×170	5000
MBR30100LDT	TO-252	50pcs/Tube	558×148×38	1000	565×225×170	5000
MBR30100LMT	TO-263	50pcs/Tube	558×148×38	4000	565×225×170	20000



**MBR30100LCT/MBRF30100LCT**  
**MBR30100LDT/MB30100LMT**  
 Low VF Trench Schottky Rectifiers



**RATING AND CHARACTERISTICS CURVES**

FIG.1-FORWARD CURRENT DERATING CURVE

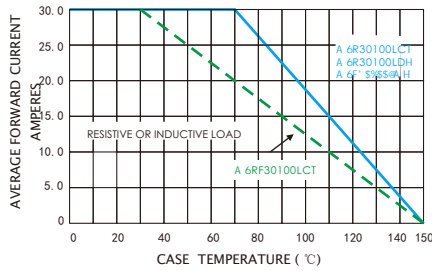


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

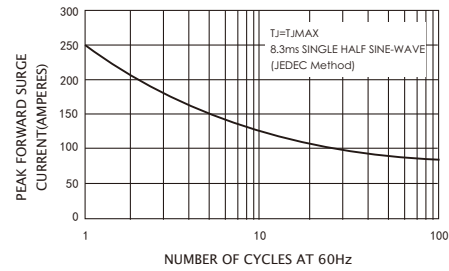


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

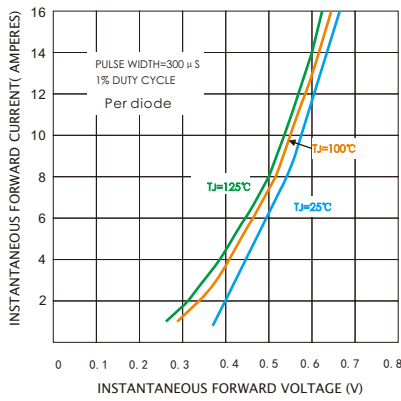


FIG.4-TYPICAL REVERSE CHARACTERISTICS


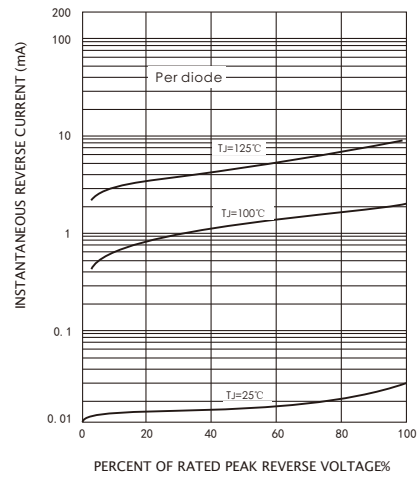



FIG.5-TYPICAL JUNCTION CAPACITANCE

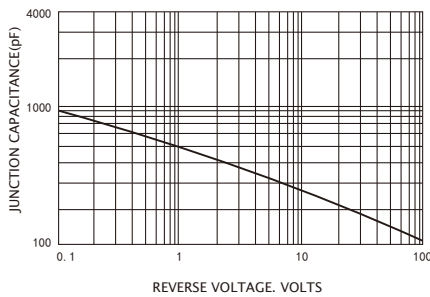


## PACKAGE OUTLINE DIMENSIONS

Dimensions in inches and (millimeters)


**TO-220AB**

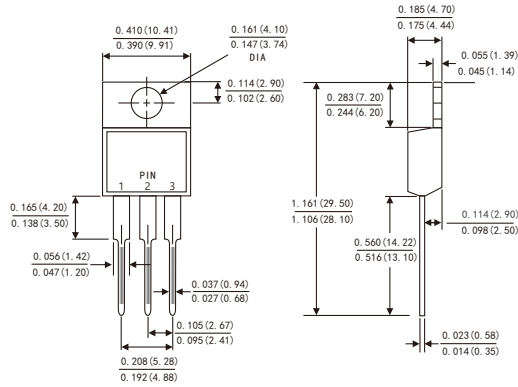


**ITO-220AB**

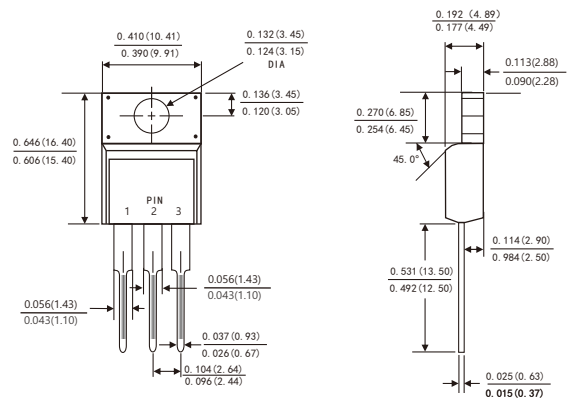

**TO-263**

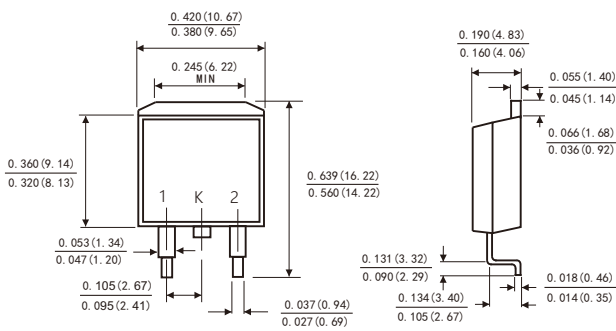


**TO-252**

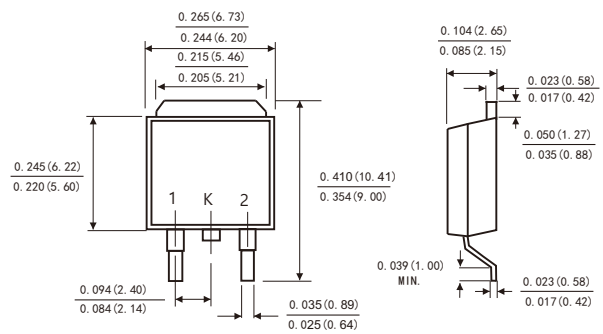


**Suggested Pad Layout**

( TO-263 )

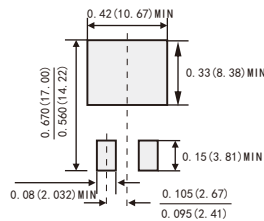

**Suggested Pad Layout**

( TO-252 )

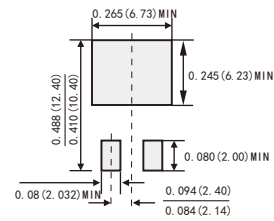

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [LGE](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#)  
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SK310-T](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#)  
[MA4E2501L-1290](#) [MBRA140TRPBF](#) [MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#) [SB007-03C-TB-E](#)  
[SK33B-TP](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#)  
[ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#)  
[MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#) [1N5819T-G](#) [B0530WSQ-7-F](#)  
[PDS1040Q-13](#) [B160BQ-13-F](#) [SDM05U20CSP-7](#) [B140S1F-7](#) [HSM560Je3/TR13](#)