

Features


- Adopt FRD chip
- Low forward Voltage drop
- Fast reverse recovery time
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability

Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

Mechanical Data

- **Package:** TO-220AC ITO-220AC
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

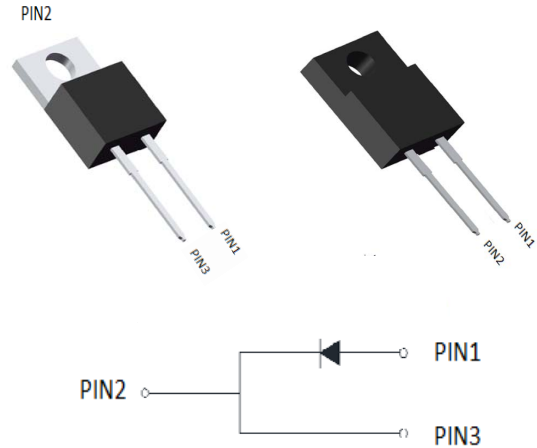

■Maximum Ratings (Ta=25°C Unless otherwise specified)

	V _{RSM} V	V _{RRM} V
MUR1660	600	600
MUR1660F	600	600

Symbol	Test Conditions	Maximum Ratings	Unit
I_{FRMS}	T _{VJ} =T _{VJM}	28	A
I_{FAVM}	T _C =100°C; rectangular, d=0.5	16	
I_{FRM}	t _p <10us; rep. rating, pulse width limited by T _{VJM}	150	
I_{FSM}	T _{VJ} =45°C t=10ms (50Hz), sine	220	A
I²t	T _{VJ} =45°C t=10ms (50Hz), sine t=8.3ms (60Hz), sine	50 50	A ² s
	T _{VJ} =150°C t=10ms(50Hz), sine t=8.3ms(60Hz), sine	36 37	
T_{VJ} T_{VJM} T_{stg}		-40...+175 175 -40...+175	°C
P_{tot}	T _C =25°C	62	W
M_d	Mounting torque	0.4...0.6	Nm
Weight		2	g

■Electrical Characteristics

Symbol	Test Conditions	Characteristic Values		Unit
		typ.	max.	
I _R	T _{VJ} =25°C; V _R =V _{RRM}		50	uA
	T _{VJ} =25°C; V _R =0.8·V _{RRM}		25	uA
	T _{VJ} =125°C; V _R =0.8·V _{RRM}		3	mA
V _F	I _F =16A; T _{VJ} =150°C T _{VJ} =25°C		1.55 1.70	V
V _{TO}	For power-loss calculations only		1.12	V
r _T	T _{VJ} =T _{VJM}		23.2	mΩ
R _{thJC} R _{thCK} R _{thJA}		0.5	2 60	K/W
t _{rr}	I _F =1A; -di/dt=50A/us; V _R =30V; T _{VJ} =25°C	40	50	ns
I _{RM}	V _R =350V; I _F =15A; -dif/dt=100A/us; L<0.05uH; T _{VJ} =100°C	4	4.4	A

■Thermal Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	MUR1660/MUR1660F
Thermal Resistance	Between junction and case	R _{θJ-C}	°C/W	4.0
	Between junction and Air	R _{θJ-A}	°C/W	50

■Ordering Information (Example)

PREFERRED P/N	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MUR1660/MUR1660F	Approximate 1.6	50	1000	5000	Tube

■Characteristics (Typical)

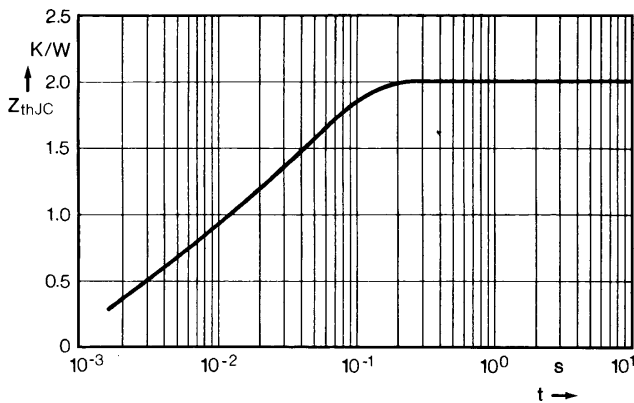


Fig. 7 Transient thermal impedance junction to case.



LGE

MUR1660/MUR1660F

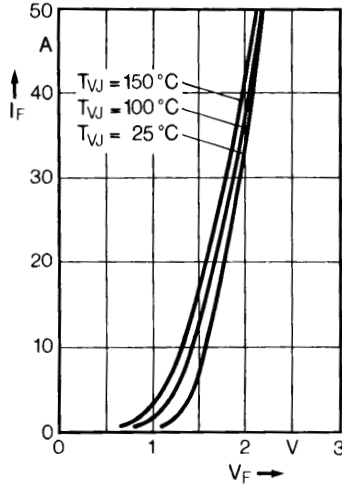


Fig. 1 Forward current versus voltage drop.

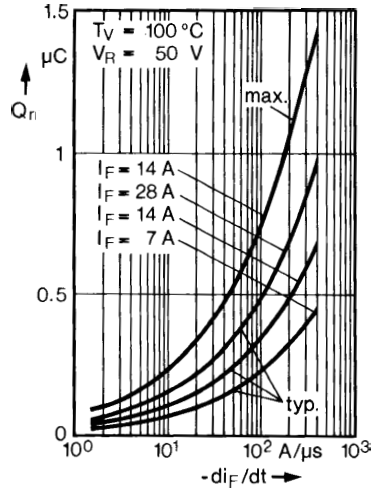


Fig. 2 Recovery charge versus $-di_F/dt$.

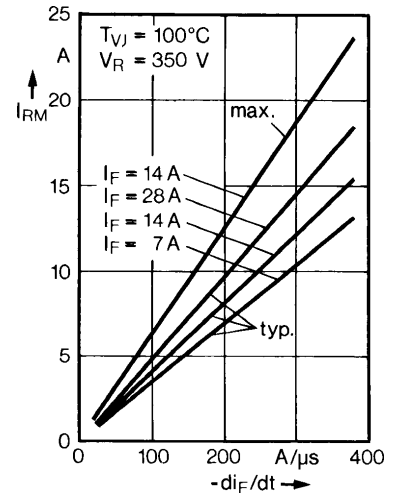


Fig. 3 Peak reverse current versus $-di_F/dt$.

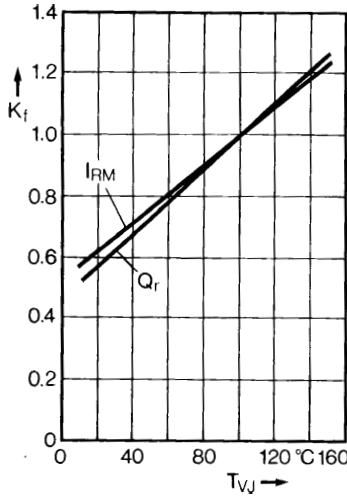


Fig. 4 Dynamic parameters versus junction temperature.

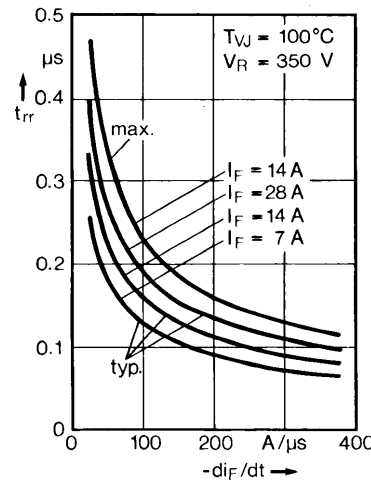


Fig. 5 Recovery time versus $-di_F/dt$.



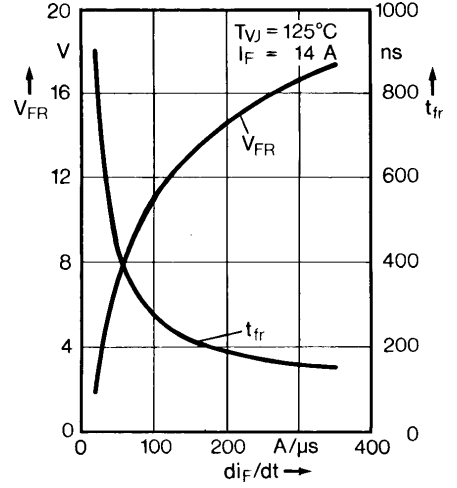


Fig. 6 Peak forward voltage versus di_F/dt .


FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

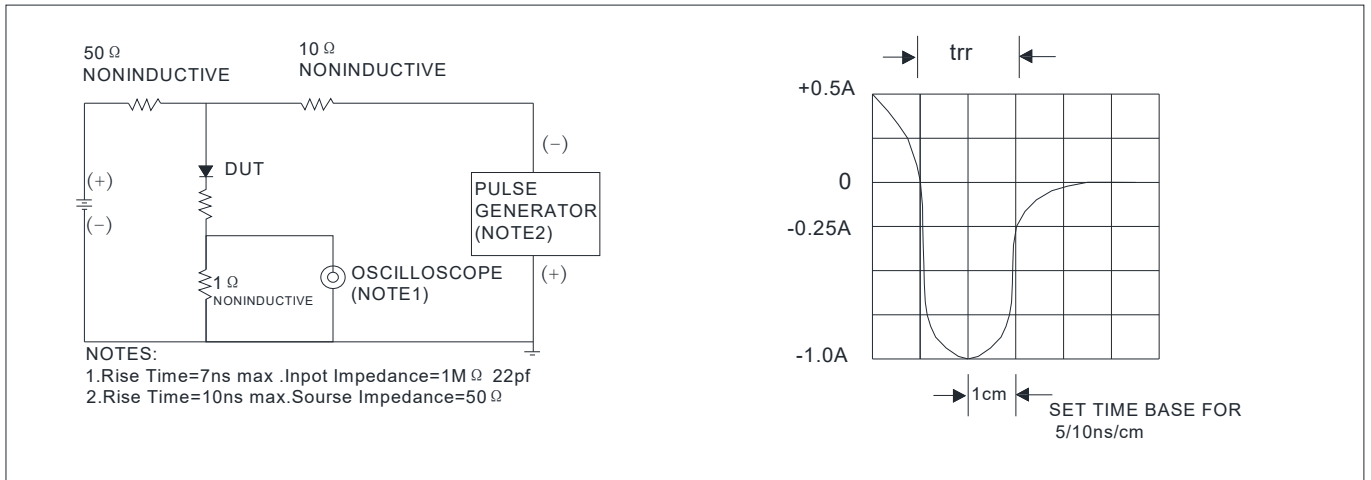

■ Outline Dimensions

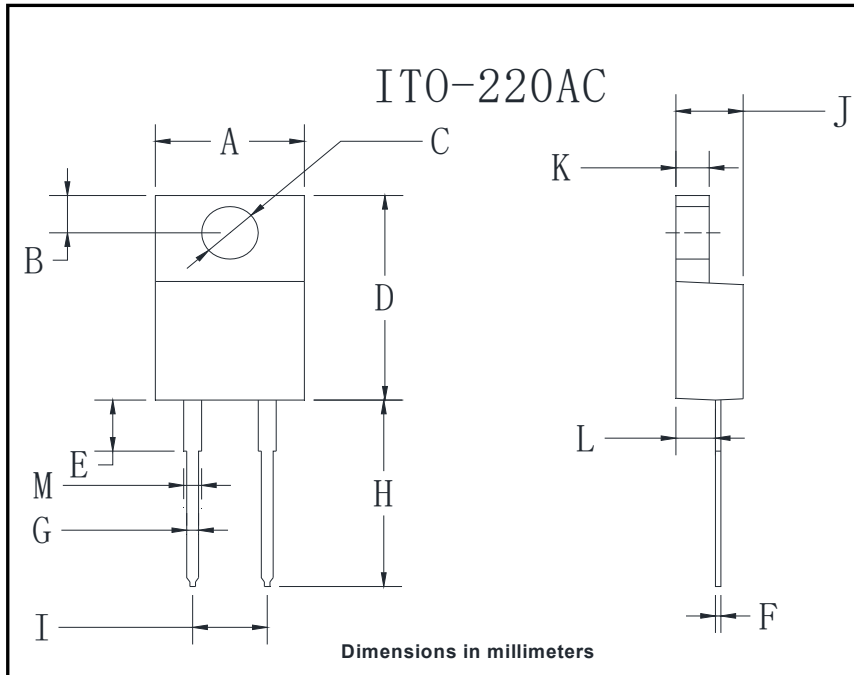

ITO-220AC		
Dim	Min	Max
A	9.8	10.2
B	2.54	3.45
C	2.95	3.45
D	14.23	16.51
E	2.51	3.3
F	0.45	0.75
G	0.65	0.87
H	12.70	14.73
I	4.97	5.23
J	4.3	4.8
K	2.5	2.74
L	1.65	2.30
M	1.03	1.43

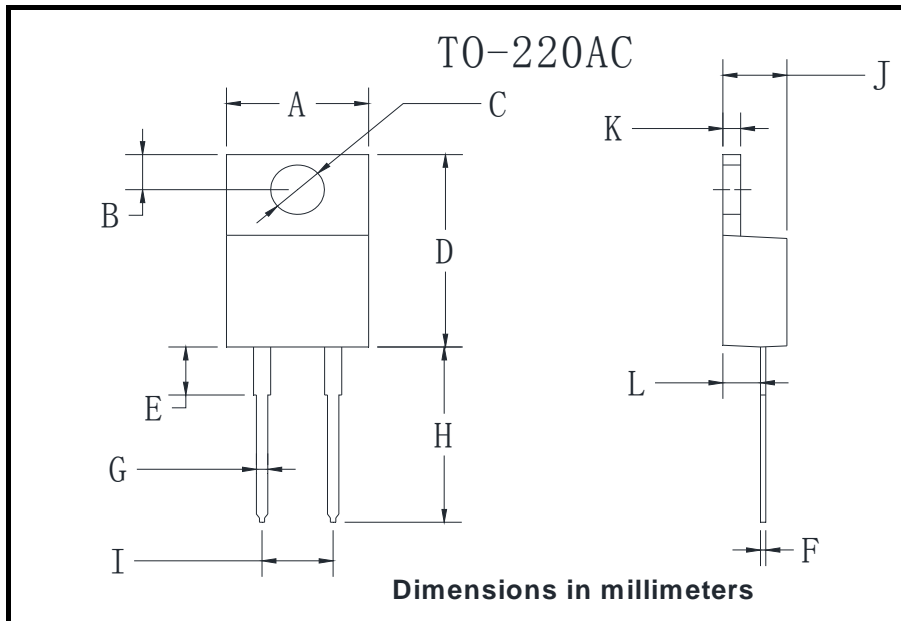

TO-220AC		
Dim	Min	Max
A	9.95	10.35
B	2.55	2.95
C	3.75	4.05
D	14.95	15.25
E	3.75	4.25
F	0.26	0.5
G	0.68	0.94
H	13.3	13.9
I	4.86	5.26
J	4.38	4.78
K	1.14	1.4
L	2.37	2.79

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [LGE](#) manufacturer:

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [1N5397](#) [1N4005-TR](#) [1N4007-BP](#) [UFS120Je3/TR13](#) [20ETS12S](#) [RRE02VS6SGTR](#) [MS306](#) [A1N5404G-G](#)
[CRF02\(T5L,TEMQ\)](#) [ACGRB207-HF](#) [CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [1N5395-TP](#) [UES1302](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [DZ-](#)
[1380](#) [85HFR60](#) [40HFR60](#) [70HF120](#) [85HFR80](#) [SCF7500](#) [SM100](#) [ACGRA4001-HF](#) [SKN70/08](#) [NTE5819](#) [NTE5827](#) [NTE5828](#) [NTE5911](#)
[NTE5915](#) [NTE6104](#) [NTE6163](#) [NTE6164](#) [NTE6165](#) [NTE6364](#) [TSD3G](#) [SET130312](#) [NRVUS110VT3G](#) [UES1106](#) [UES1306](#)
[NRVUS240VT3G](#) [D5FE60-5063](#) [R4000GPS-TP](#) [D4015L56TP](#) [UES1306HR2](#) [FX20K120](#) [D20XB60-7101](#)