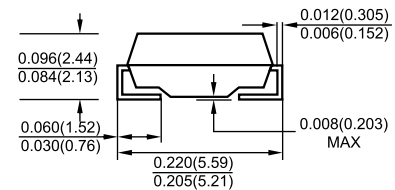
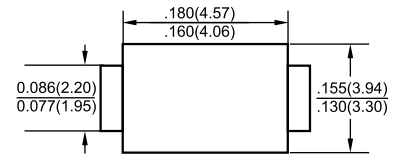



Features

- ◇ Plastic package has Underwriters Laboratory Flammability Classification 94V-0 utilizing Flame Retardant Epoxy Molding Compound.
- ◇ Guard ring for overvoltage protection
- ◇ High current capability, low forward voltage drop
- ◇ Low power loss, high efficiency
- ◇ High surge capability

Mechanical Data

- ◇ Case: Molded plastic SMB
- ◇ Terminals: Plated leads solderable per MIL-STD-202, Method 208 guaranteed
- ◇ Polarity: Color band denotes cathode end
- ◇ Mounting Position: Any
- ◇ Weight: 0.093 gram
- ◇ Lead Free: For RoHS/Lead Free Version
- ◇ Marking: LGE SS5XX

SMB


Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERS

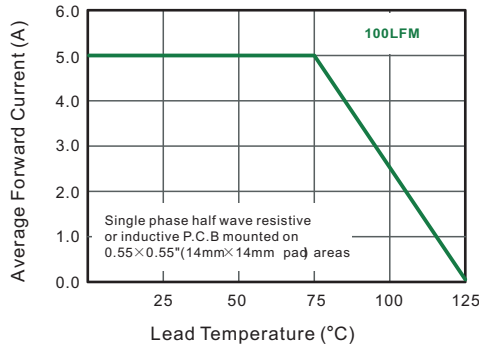
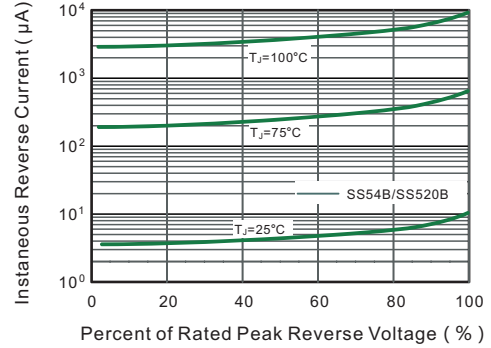
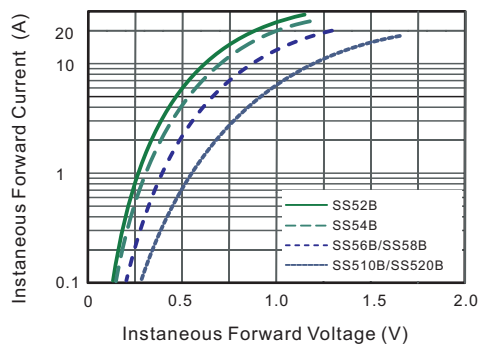
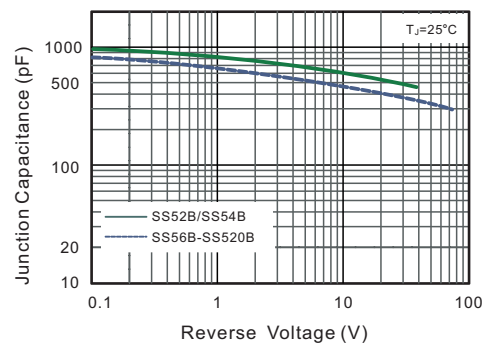
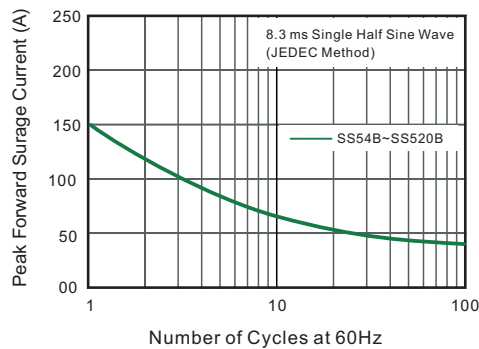
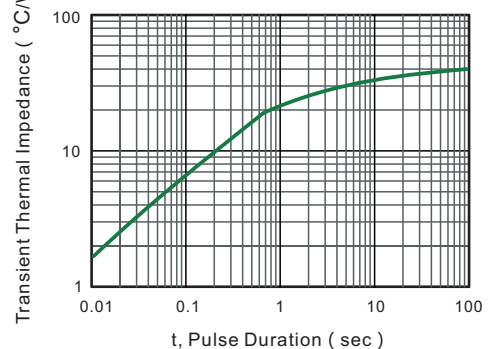
Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60HZ, resistive or inductive load. For capacitive load, derate by 20%.

Type Number	Symbol	SS	SS	SS	SS	SS	SS5	SS5	SS5	UNITS
		52	54	55	56	58	10	15	20	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	40	50	60	80	100	150	200	V
Maximum RMS Voltage	V_{RMS}	14	28	35	42	56	70	105	140	V
Maximum DC Blocking Voltage	V_{DC}	20	40	50	60	80	100	150	200	V
Average Rectified Output Current (Note 1) @ $T_L=100^\circ\text{C}$	$I_{F(AV)}$	5.0								A
Peak forward surge current: 8.3ms single half-sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	175								A
I ² t Rating for Fusing (t < 8.3ms)	I ² t	127								A ² S
Forward Voltage @ $I_F=5.0\text{A}$	V_{FM}	0.45	0.55	0.7		0.85		0.85		V
Peak Reverse Current @ $T_A=25^\circ\text{C}$	I_R	0.5				0.5				Ma
At Rated DC Blocking Voltage @ $T_A=100^\circ\text{C}$	I_R	20				10				
Typical Junction Capacitance (Note 2)	C_J	500				350				pF
Typical Thermal Resistance Junction to Ambient (Note 1)	$R_{\theta JA}$	55								°C/W
Operating Temperature Range	T_J	-55 to +150								°C
Storage Temperature Range	T_{STG}	-55 to +150								°C

Note: 1. Pulse test: 300µs pulse width, 1% duty cycle.

 2. P.C.B. mounted with 0.55"X0.55" (14.0X14.0mm²) copper pad areas.

Fig.1 Forward Current Derating Curve

Fig.2 Typical Reverse Characteristics

Fig.3 Typical Forward Characteristic

Fig.4 Typical Junction Capacitance

Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

Fig.6- Typical Transient Thermal Impedance


X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [LGE](#) manufacturer:

Other Similar products are found below :

[CUS06\(Te85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(Te85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)