




Features

- Both the DTC123J and DTA123J in SOT-363 Package.
- Reduces Board Space.
- Reduces Component Count.
- Surface Mount Package Suited for Automated Assembly.

Mechanical Data

- Case: SOT-363.
- Molding compound, UL flammability classification rating 94V-0.
- Terminals: Matte tin plated leads, solderable per MIL-STD-202, Method 208.

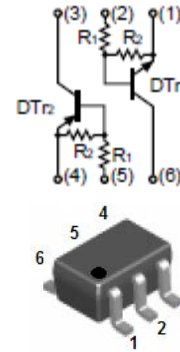

SOT-363

Ordering Information

Part Number	Package	Shipping	Marking Code
UMD10N	SOT-363	3000/Tape&Reel	D10

Maximum Ratings (@ $T_A=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Value		Units
		Tr1	Tr2	
MAXIMUM RATINGS				
V_{CC}	Supply Voltage	50	-50	V
V_{IN}	Input Voltage	-5 to +12	+5 to -12	V
I_o	Output Current	100	-100	mA
I_c	Collector Current	100	-100	mA
Thermal Characteristic				
P_{tot}	Total Power Dissipation, $T_a \leq 25^{\circ}\text{C}$	0.2		W
T_J	Junction Temperature	-55 to +150		$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range	-55 to +150		$^{\circ}\text{C}$





Electrical Characteristics-TR1 (@TA=25°C unless otherwise specified)





Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Input Voltage	$V_{I(off)}$	$V_{CC}=5V, I_o=100\mu A$	0.5	-	-	V
	$V_{I(on)}$	$V_O=0.3V, I_o=5mA$	-	-	1.1	V
Output Voltage	$V_{O(on)}$	$I_o=5mA, I_i=0.25mA$	-	0.1	0.3	V
Input Current	I_i	$V_i=5V$	-	-	3.6	mA
Output Current	$I_{O(off)}$	$V_{CC}=50V, V_i=0V$	-	-	0.5	μA
DC Current Gain	G_1	$V_O=5V, I_o=10mA$	80	-	-	-
Input Resistor	R_1		1.54	2.2	2.86	k Ω
Resistance ratio	R_2/R_1		17	21	26	
Resistance Ratio Tolerance	$\Delta R_2/R_1$		-20	-	20	%
Gain-Bandwidth Product	f_T	$V_{CE}=10V, I_E=5mA, f=100MHz$	-	250	-	MHz

Electrical Characteristics-TR2 (@TA=25°C unless otherwise specified)



Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Input Voltage	$V_{I(off)}$	$V_{CC}=-5V, I_o=-100\mu A$	-0.5	-	-	V
	$V_{I(on)}$	$V_O=-0.3V, I_o=-5mA$	-	-	-1.1	V
Output Voltage	$V_{O(on)}$	$I_o=-5mA, I_i=-0.25mA$	-	-0.1	-0.3	V
Input Current	I_i	$V_i=-5V$	-	-	-3.6	mA
Output Current	$I_{O(off)}$	$V_{CC}=-50V, V_i=0V$	-	-	-0.5	μA
DC Current Gain	G_1	$V_O=-5V, I_o=-10mA$	80	-	-	-
Input Resistor	R_1		1.54	2.2	2.86	k Ω
Resistance ratio	R_2/R_1		17	21	26	
Resistance Ratio Tolerance	$\Delta R_2/R_1$		-20	-	20	%
Gain-Bandwidth Product	f_T	$V_{CE}=-10V, I_E=5mA, f=100MHz$	-	250	-	MHz

Ratings and Characteristic Curves-TR1 (TA=25°C unless otherwise noted)

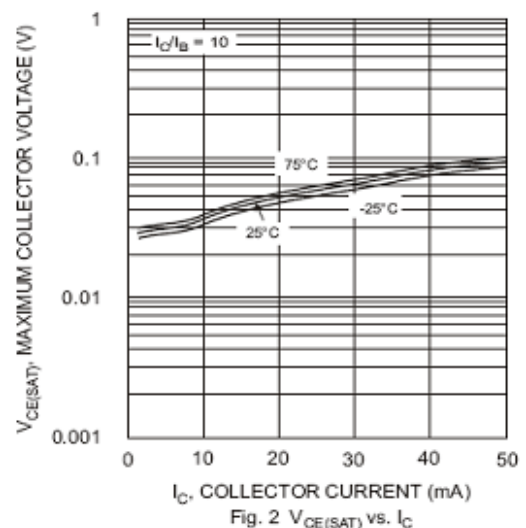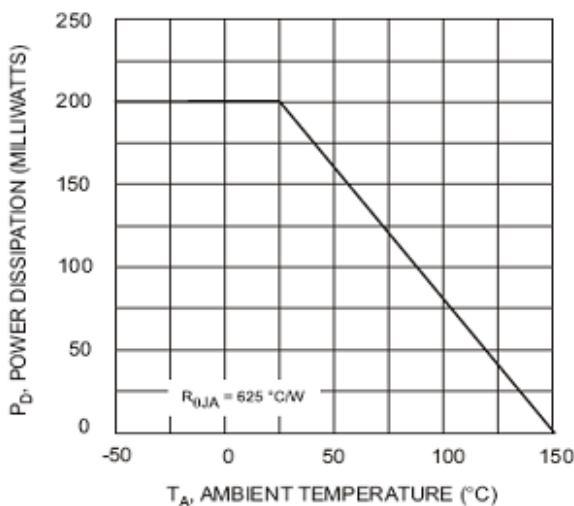

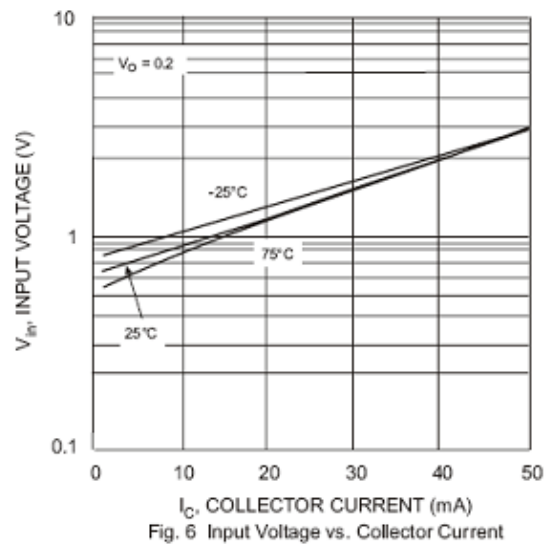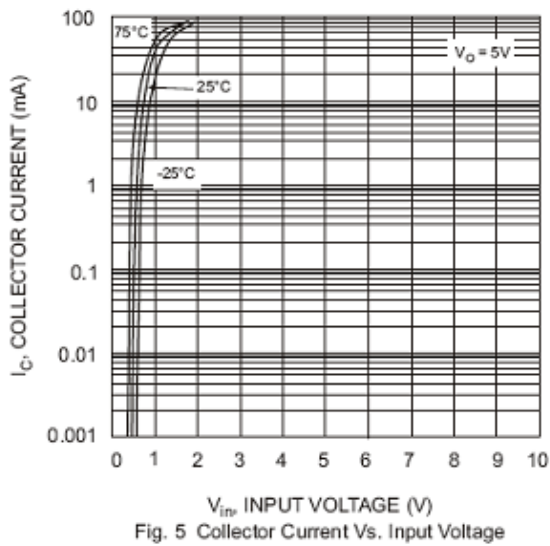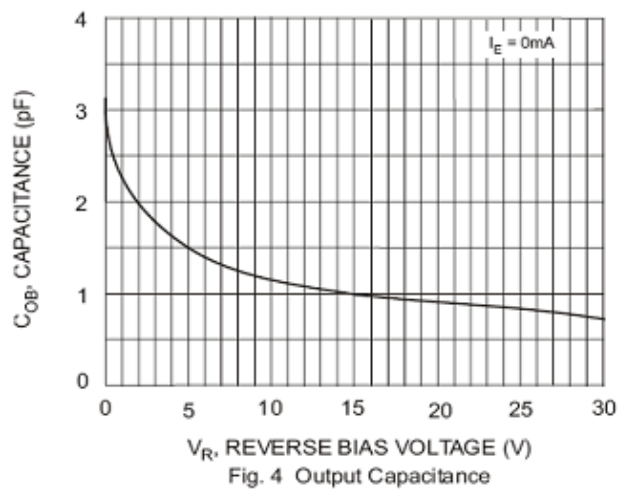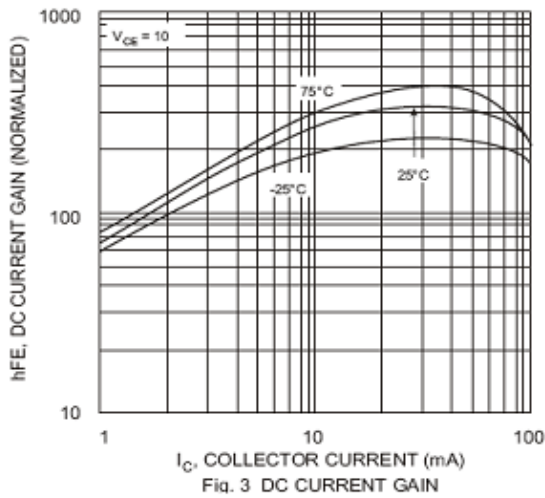





Ratings and Characteristic Curves-TR2 ($T_A=25^\circ\text{C}$ unless otherwise noted)

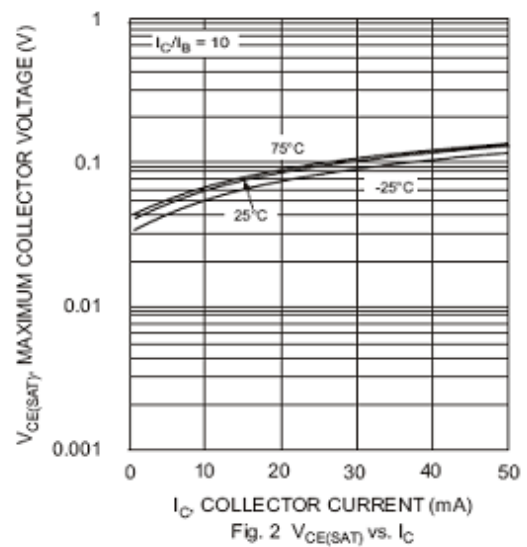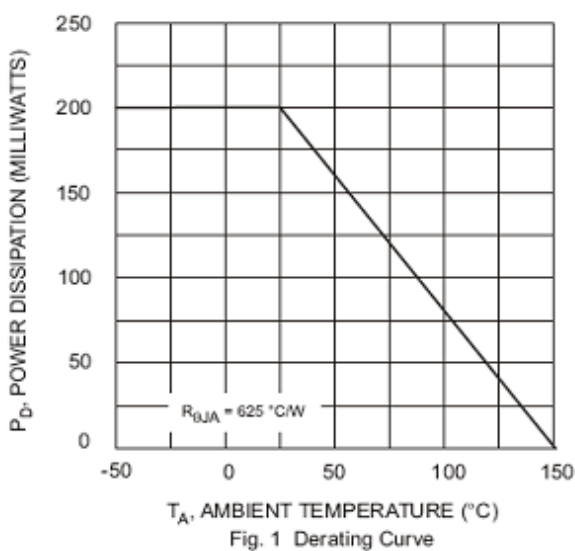



UMD10N


Digital Transistor

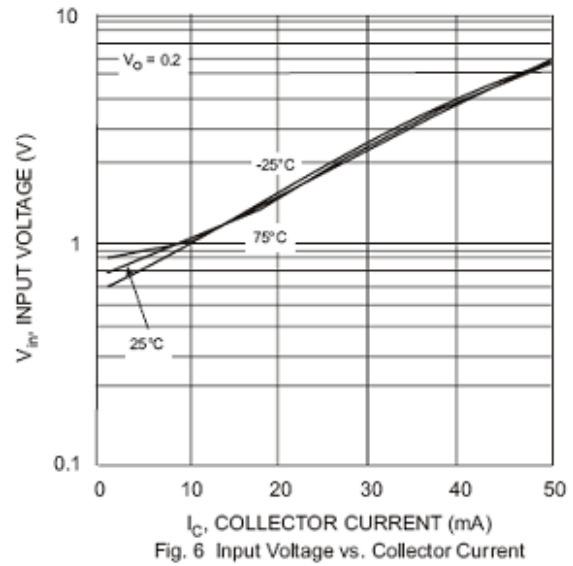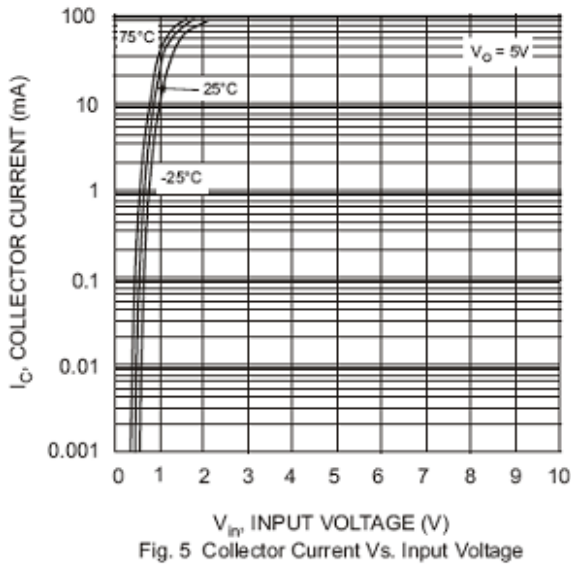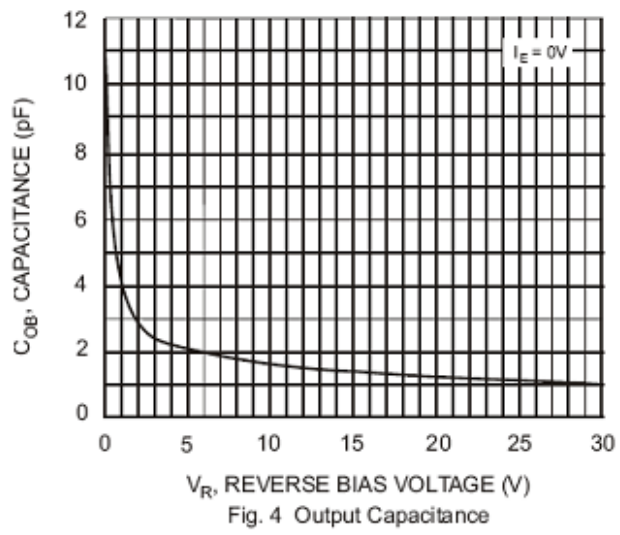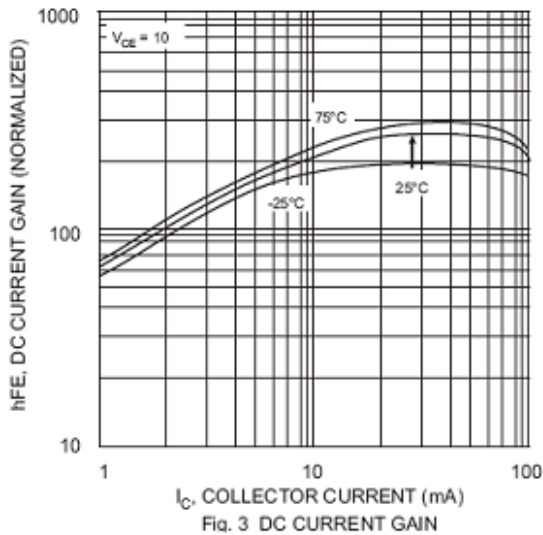




Package Outline Dimensions (unit: mm)

SOT-363

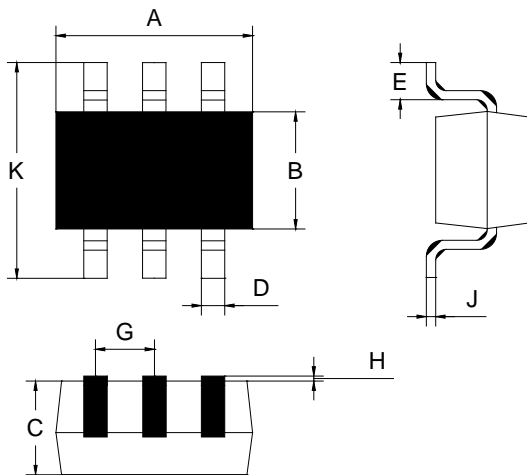

SOT-363		
Dim	Min	Max
A	2.00	2.20
B	1.15	1.35
C	0.85	1.05
D	0.15	0.35
E	0.25	0.40
G	0.60	0.70
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

SOLDERING FOOTPRINT (unit: mm)

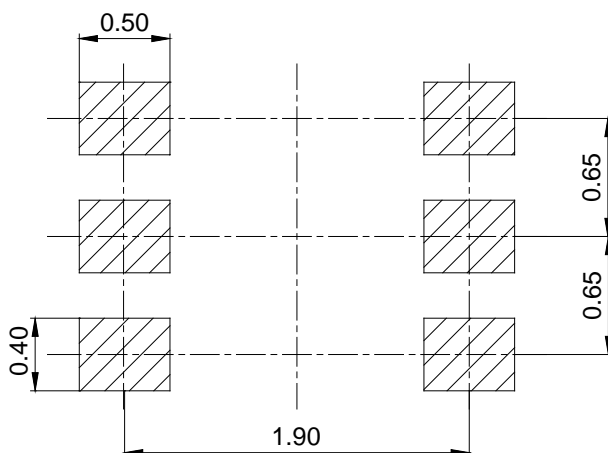

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - Pre-Biased](#) category:

Click to view products by [LGE](#) manufacturer:

Other Similar products are found below :

[RN1302TE85LF](#) [DRC9A14E0L](#) [DTA124GKAT146](#) [DTA144WETL](#) [DTA144WKAT146](#) [DTC113EET1G](#) [DTC115TETL](#) [DTC115TKAT146](#)
[DTC144VUAT106](#) [MUN5241T1G](#) [BCR158WH6327XTSA1](#) [SMUN5330DW1T1G](#) [RN1306\(TE85L,F\)](#) [EMH15T2R](#) [NSBC143ZPDP6T5G](#)
[DTC114EUA-TP](#) [SMUN5237DW1T1G](#) [SMUN5213DW1T1G](#) [SMUN5114DW1T1G](#) [DTC124ECA-TP](#) [DTA114ECA-TP](#) [DTC113EM3T5G](#)
[NSVMUN5135DW1T1G](#) [NSVMUN2237T1G](#) [NSVDTC143ZM3T5G](#) [SMUN5335DW1T2G](#) [SMUN5216DW1T1G](#) [NSVMUN5316DW1T1G](#)
[NSVMUN5215DW1T1G](#) [NSVMUN5213DW1T3G](#) [NSVIMD10AMT1G](#) [NSVEMC2DXV5T1G](#) [NSVDTC144WET1G](#) [NSVDTC123JET1G](#)
[NSVDTA143EM3T5G](#) [NSVB1706DMW5T1G](#) [NSBC143EDP6T5G](#) [NSBA144WDXV6T1G](#) [DTA115TET1G](#) [NSBC115TDP6T5G](#)
[NSBA113EF3T5G](#) [MUN2235T1G](#) [NSBC143ZDXV6T5G](#) [NSVDTA114EM3T5G](#) [MUN2138T1G](#) [DCX124EUQ-7-F](#) [MUN2141T1G](#)
[DTC144TET1G](#) [MUN2238T1G](#) [SMUN5112DW1T1G](#)