

FEATURES

- ❖ For surface mount applications
- ❖ Easy pick and place
- ❖ Ultra fast recovery times for high efficiency
- ❖ Low forward voltage, low power loss
- ❖ Built-in strain relief, ideal for automated placement
- ❖ High temperature soldering: 250°C/10 seconds on terminals
- ❖ Plastic package has underwriters laboratories flammability classification 94V-0

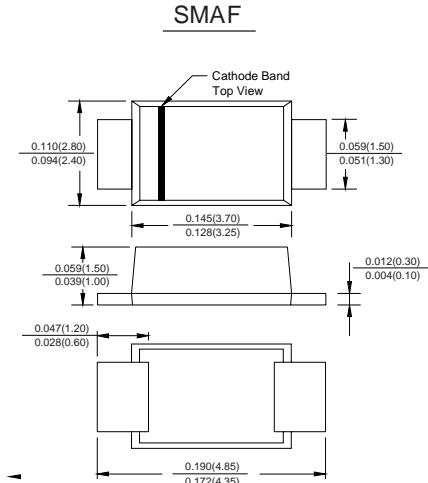
MECHANICAL DATA

- ❖ Case: JEDEC SMAFL, molded plastic body over passivated chip
- ❖ Terminals: Solder Plated, solderable per MIL-STD-750, Method 2026
- ❖ Polarity: Color band denotes cathode end

Marking Information



LGE: Lu Guang Electronic XXXX:
marking code (US2AF-US2MF)



Dimensions in inches and (millimeters)

Maximum Ratings (@TA = 25°C unless otherwise specified)

Characteristic	Symbol	US2AF	US2BF	US2DF	US2GF	US2JF	US2KF	US2MF	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RWS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at T _L =90°C	I _{F(AV)}				2.0				A
Peak forward surge current 8.3ms single half sine-wave super imposed on rated load	I _{FSM}				50				A

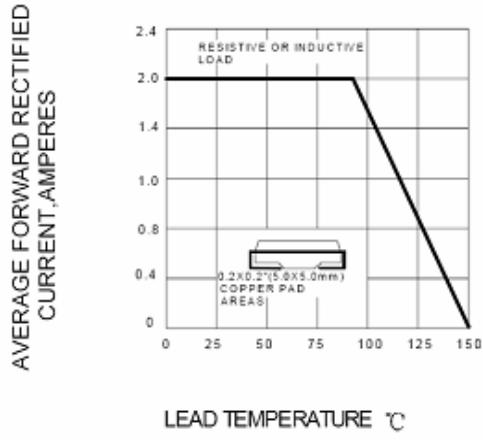
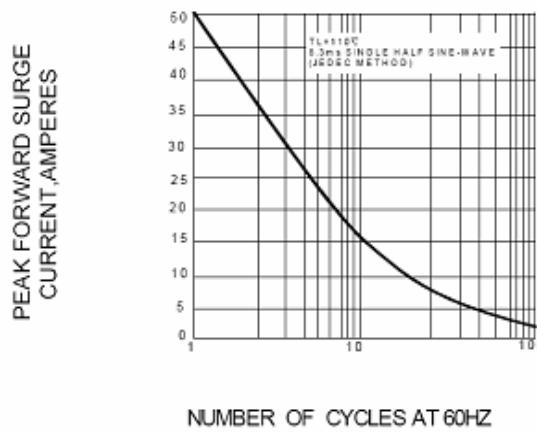
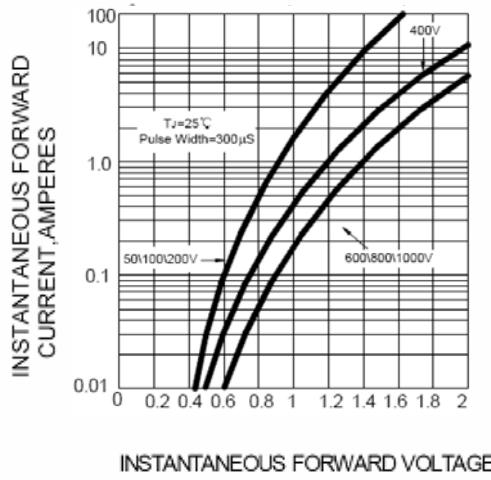
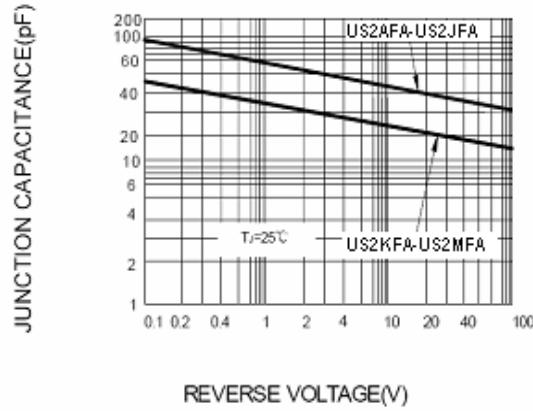
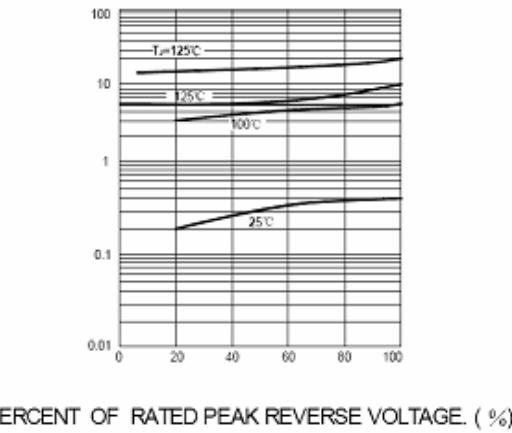
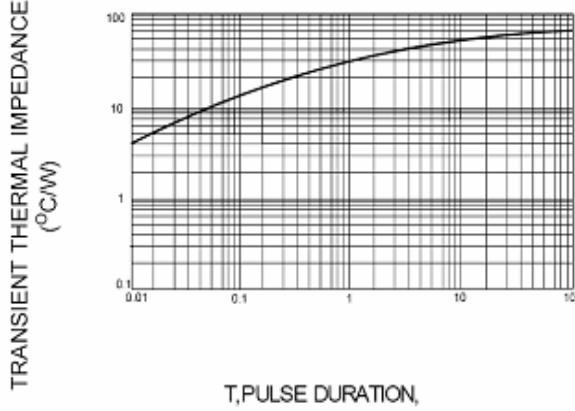
Thermal Characteristics

Characteristic	Symbol	US2AF	US2BF	US2DFA	US2GF	US2JF	US2KF	US2MF	UNITS
Typical junction capacitance at 4.0V,1MHZ	C _J		50			30			p F
Maximum thermal resistance (NOTE1)	R _{θJA}			40					°C/W
	R _{θJL}			15					
Operating temperature range	T _J			-55-----+150					°C
Storage temperature range	T _{STG}			-55-----+150					°C

Electrical Characteristics (@TA = 25°C unless otherwise specified)

Characteristic	Symbol	US2AF	US2BF	US2DF	US2GF	US2JF	US2KF	US2MF	UNITS
Maximum instantaneous forward voltage at 2.0A	V _F		1.0		1.25		1.7		V
Maximum DC reverse current @T _A =25°C at rated DC blocking voltage @T _A =125°C	I _R			10.0					μ A
Maximum reverse recovery time at I _F =0.5A I _R =1.0A I _{rr} =0.25A	t _{rr}		50			75			ns

NOTE: 1.P.C.B.mounted on 0.2X0.2"(5.0X5.0mm) copper pad area

FIG.1 – FORWARD CURRENT DERATING CURVE

FIG.2 – MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

FIG.3 – TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

FIG.5 – TYPICAL JUNCTION CAPACITANCE

FIG.6 – TYPICAL TRANSIENT THERMAL IMPEDANCE

FIG.6 – TYPICAL TRANSIENT THERMAL IMPEDANCE

FIG.6 – TYPICAL TRANSIENT THERMAL IMPEDANCE

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
SMA	5000/REEL	80000	36X30.6X31	12.00	11.00

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rectifiers category:

Click to view products by LGE manufacturer:

Other Similar products are found below :

[70HFR40](#) [FR105 R0](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [1N4002G](#) [1N4005-TR](#) [UFS120Je3/TR13](#) [JANS1N6640US](#) [481235F](#)
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T110HF60](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS12\(T5L,TEMQ\)](#) [ACGRB207-HF](#)
[CLH07\(TE16L,Q\)](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [85HFR60](#) [40HFR60](#) [70HF120](#) [85HFR80](#)
[D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SDHD5K](#) [ACGRA4001-HF](#) [ACURA107-HF](#) [D1821SH45T PR](#) [D1251S45T](#)
[NTE6358](#) [NTE5850](#) [NTE5819](#) [NTE5837](#) [NTE5892](#) [NTE5900](#) [NTE5911](#) [NTE5915](#) [NTE5921](#)