





RoHS

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

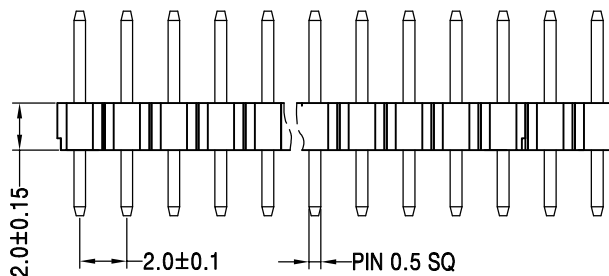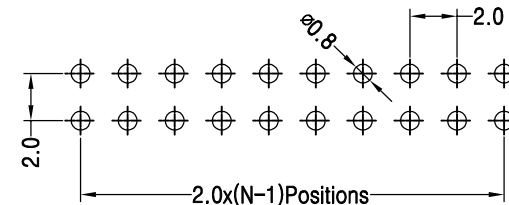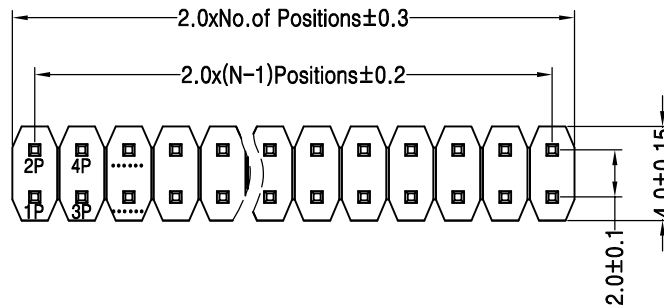

Ordering Information

P 2 C 2 12 1 5 00 X 1611

产品类型 P=排针
 间距 2=2.0
 塑胶高度 C=2.0
 排数 2=双排
 单排PIN数 2~40P
 产品形态 1=DIP
 塑胶材料 2=LCP
 5=PA6T
 电镀厚度 00=常规
 01=AU1U
 包装方式 1=管装
 2=卷装
 3=盘装
 4=袋装
 5=盒装

序列号

| Dimension antitheses list | | | | | | | |
|---------------------------|-----|----|----|-----|-----|-----|-----|
| ITEM | PA | PB | PW | PC | L | H | W |
| 001 | 3.9 | | | 2.8 | 8.7 | 2.0 | 4.0 |
| Alternate | | | | | | | |

| | | | | OPERATION | | DRAW | | SCALE | | FIT | | 深圳市连盛精密连接器有限公司 | | | |
|-----|------------|--------------------------|--|-----------|---|---------|--|-------|-------|----------|--|--|--|------------|--|
| | | | | X.X | ±0.30 | | | UNIT | mm | PART NO. | | | | 1010200421 | |
| | | | | X.XX | ±0.20 | CHECK | | SIZE | A4 | | | | | | |
| A0 | 2012.04.11 | NEW DRAWING | | X.XXX | ±0.10 <th colspan="2">APPROVE</th> <th>SHEET</th> <td>1/1</td> <th colspan="2">TITLE:</th> <td colspan="2">2.0PH H=2.0 2x12P DIP PA3.9 PC2.8 L=8.7 AU0.6U PA6T</td> | APPROVE | | SHEET | 1/1 | TITLE: | | 2.0PH H=2.0 2x12P DIP PA3.9 PC2.8 L=8.7 AU0.6U PA6T | | | |
| REV | DATE | MODIFICATION DESCRIPTION | | CHANGE | ANGLE | TOL | | | PROJ. | | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Liansheng](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)