


RoHS

SPECIFICATIONS

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

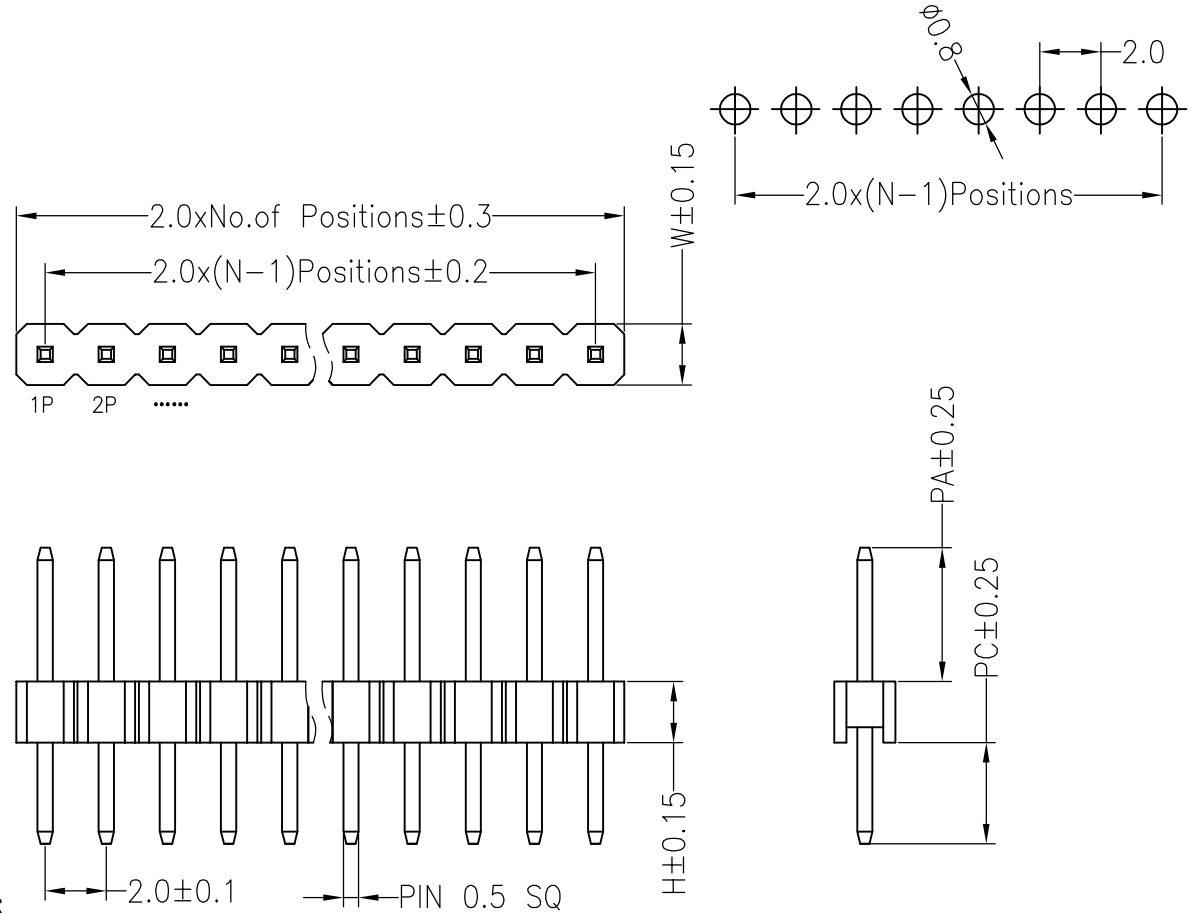

Ordering Information

**P 2 C 1 24 1 5 00 4 2195**

产品类型 P=排针  
 间距 2=2.0  
 塑胶高度 C=2.0  
 排数 1=单排  
 单排PIN数 1~40P  
 产品形态 1=DIP  
 塑胶材料 5=PA6T  
 电镀厚度 00=常规  
 01=1u"  
 02=2u"  
 03=3u"  
 包装方式 1=管装  
 2=卷装  
 3=盘装  
 4=袋装  
 5=盒装  
 序列号

Dimension antitheses list							
ITEM	PA	PB	PW	PC	L	H	W
001	3.9			2.80	8.7	2.0	2.0
Alternate							

				OPERATION		DRAW		SCALE		FIT		深圳市连盛精密连接器有限公司	
				X.X	±0.30			UNIT	mm				
				X.XX	±0.20	CHECK		SIZE	A4	PART NO.		1010200668	
A0	2012.04.11	NEW DRAWING		X.XXX	±0.10	APPROVE		SHEET	1/1	TITLE:		2.0PH H=2.0 1*24P DIP PA3.9 PC2.8 L=8.7	
REV	DATE	MODIFICATION DESCRIPTION		Angle	±3'					PROJ.	◆ ↗	AU0.6U PA6T	
1		2		3		4		5		6		7	
1		2		3		4		5		6		7	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Liansheng](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-](#)  
[002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#) [820-22-008-30-001101](#)  
[821-22-002-10-001101](#) [821-22-003-10-002101](#)