







SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

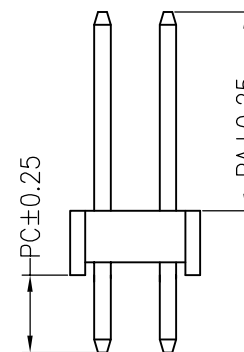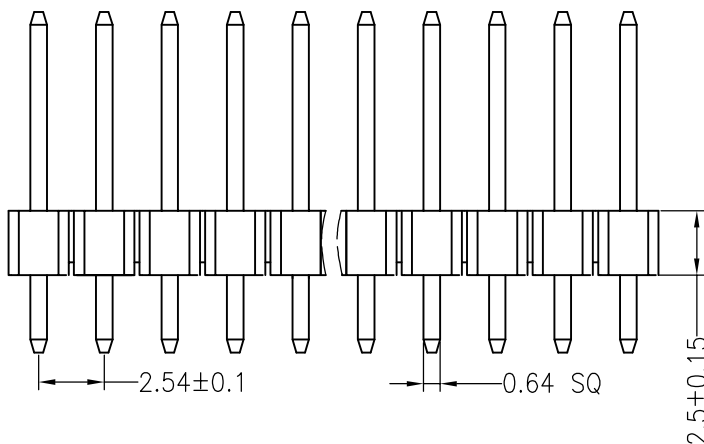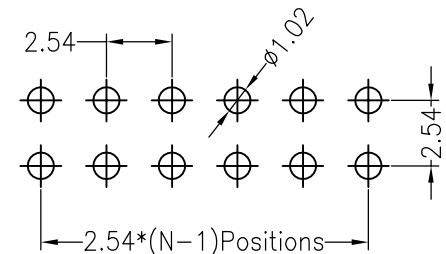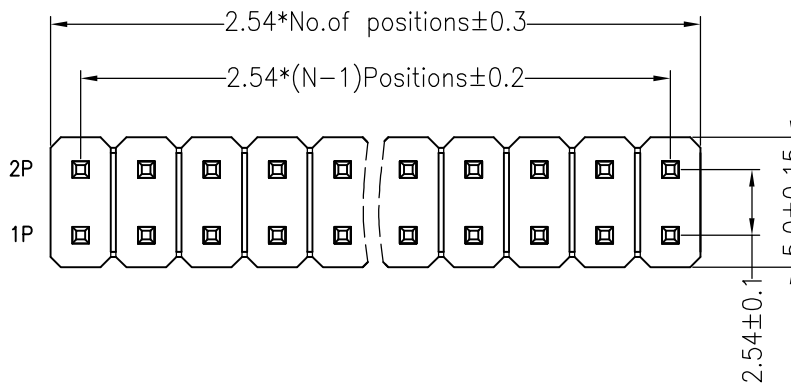

| Dimension antitheses list | | | |
|---------------------------|------|------|-------|
| ITEM | PA | PC | L |
| Standard | 6.00 | 3.00 | 11.50 |
| Alternate | | | |

| | | | | | | | | | | | | |
|-----|------------|--------------------------|--------|-----------|-------|---------|----|----------|-------|-----|--|--|
| | | | | OPERATION | | DRAW | 小卢 | 2016.9.9 | SCALE | FIT | 深圳市连盛精密连接器有限公司 PART NO. 1010300057 TITLE: 2.54PH H=2.5 2x18P DIP PA6.0 PC3.0 L=11.5 AU0.6U PA6T | |
| | | | | X.X | ±0.30 | | | | UNIT | mm | | |
| | | | | X.XX | ±0.20 | CHECK | | SIZE | A4 | | | |
| A0 | 2012.03.28 | NEW DRAWING | | X.XXX | ±0.10 | APPROVE | | SHEET | 1/1 | | | |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | Angle | ±3' | | | PROJ. | ◆ | | | |
| | | | | DIM | TOL | | | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Liansheng](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)