

# RoHS

## SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C


Contact Material:Brass

Contact Plating:Au Over Ni




Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 10 seconds)

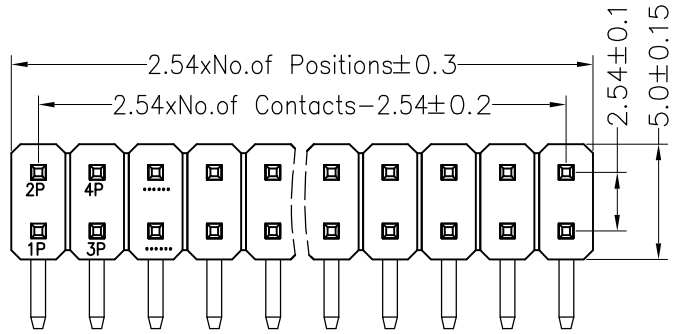

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

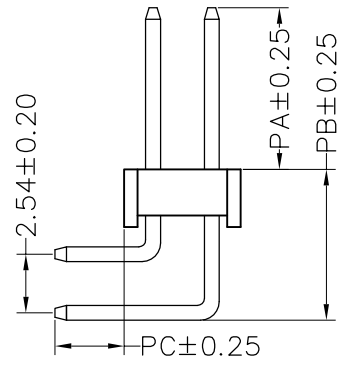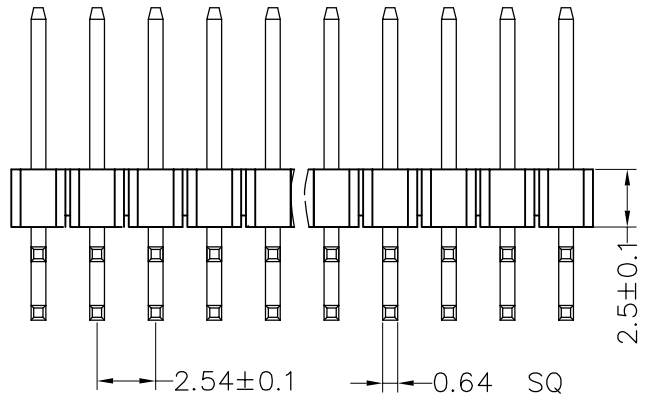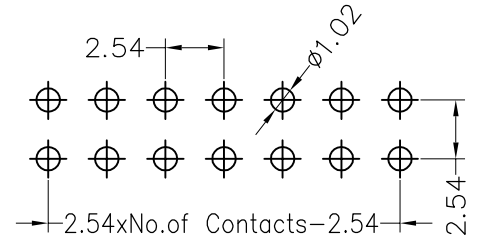

Dimension antitheses list					
ITEM	PA	PC	PB	L短	L长
Standard	6.00	3.00	6.90	13.80	18.80
Alternate					

				OPERATION		DRAW		SCALE		FIT		<p style="text-align: center;"><b>深圳市连盛精密连接器有限公司</b></p>			
				X.X	±0.30			UNIT	mm						
				X.XX	±0.20	CHECK		SIZE	A4						
A0				2012.04.11	NEW DRAWING			SHEET	1/1	PART NO.	1010300424				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM		TOL	APPROVE	PROJ.	TITLE:		2.54PH H2.5 2X6P 90° 正弯 PA6.0 PC3.0 L=13.8-18.8				
1	2	3	4	5	6	7	8	9							

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Liansheng](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)