

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass





Contact Plating:Au Or Tin Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

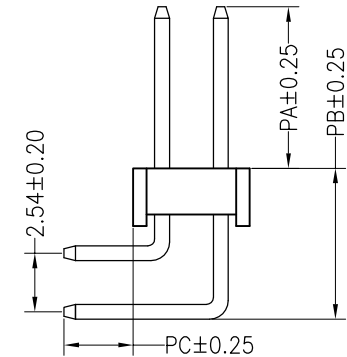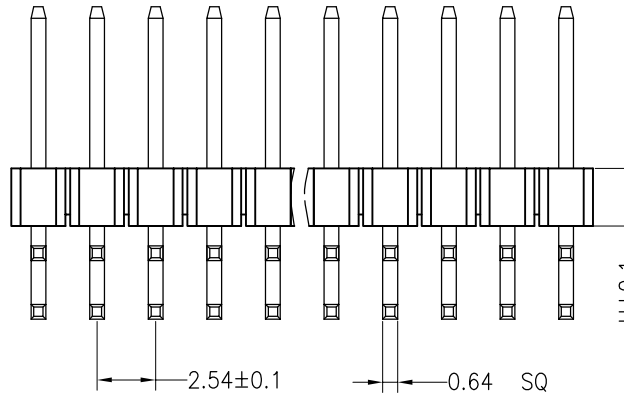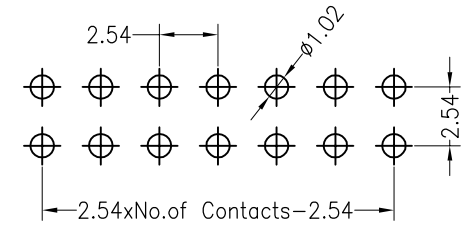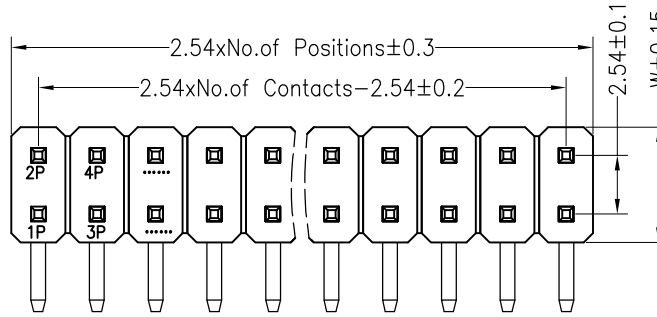

| Dimension antitheses list | | | | | | | | |
|---------------------------|-----|-----|-----|------|------|----|-----|-----|
| ITEM | PA | PB | PC | L1 | L2 | L3 | H | W |
| 001 | 6.0 | 6.9 | 3.0 | 13.8 | 18.8 | | 2.5 | 5.0 |
| Alternate | | | | | | | | |

| | | | | OPERATION | | DRAW | | SCALE | | FIT | | 深圳市连盛精密连接器有限公司 | |
|-----|------------|--------------------------|--------|-----------|-------|---------|---|-------|-----|----------|--|--|--|
| | | | | X.X | ±0.30 | | | UNIT | mm | | | | |
| | | | | X.XX | ±0.20 | CHECK | | SIZE | A4 | PART NO. | | 1010301445 | |
| A0 | 2012.04.11 | NEW DRAWING | | X.XXX | ±0.10 | APPROVE | | SHEET | 1/1 | TITLE: | | 2.54PH H=2.5 2*14P 正弯 PA6.0 PB6.9 PC3.0 L=13.8/18.8 AU0.6U PA6T | |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | Angle | ±3° | | | PROJ. | ☉ | | | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Liansheng](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)
[5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)