





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Or Tin Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

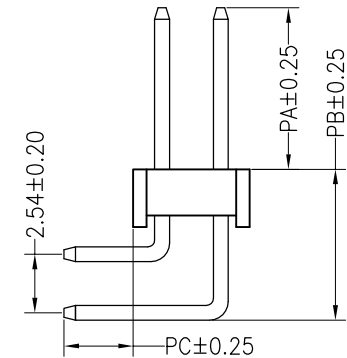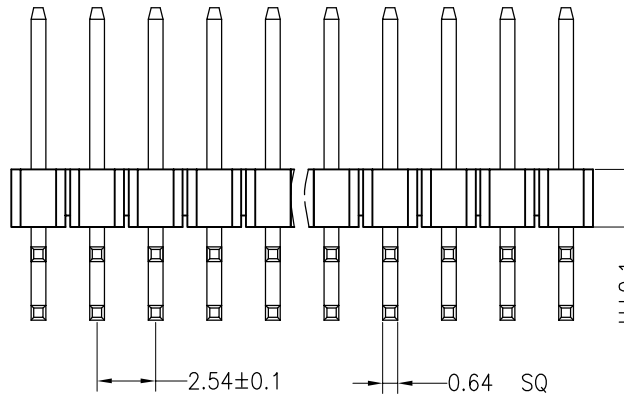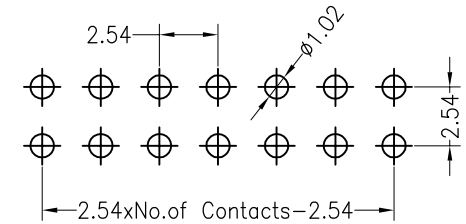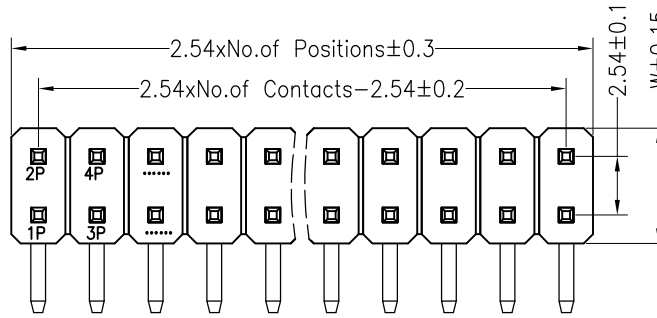

Ordering Information

P	3	D	2	22	2	5	00	4	2207
产品类别 P-密封	间距 3=2.54	插座高度 D=2.6	排数 2=双排	单排P数 1=40P	产品版本 3=PA	绝缘材料 5=PA6T	电鍍厚 00=镀层 01=1u" 02=3u" 03=5u"	包装方式 1=管装 2=卷装 3=盒装 4=散装 5=盘装	序列号

Dimension antitheses list								
ITEM	PA	PB	PC	L1	L2	L3	H	W
001	6.0	6.9	3.0	13.8	18.8		2.5	5.0
Alternate								

				OPERATION		DRAW		SCALE		FIT		深圳市连盛精密连接器有限公司 PART NO. 1010301450 TITLE: 2.54PH H=2.5 2*22P 正弯 PA6.0 PB6.9 PC3.0 L=13.8/18.8 AU0.6U PA6T			
				X.X	±0.30			UNIT	mm						
				X.XX	±0.20	CHECK		SIZE	A4						
A0				2012.04.11	NEW DRAWING			SHEET	1/1						
REV	DATE	MODIFICATION DESCRIPTION	CHANGE			APPROVE		PROJ.							

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Liansheng](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-](#)
[002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#) [820-22-008-30-001101](#)
[821-22-002-10-001101](#) [821-22-003-10-002101](#)