





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

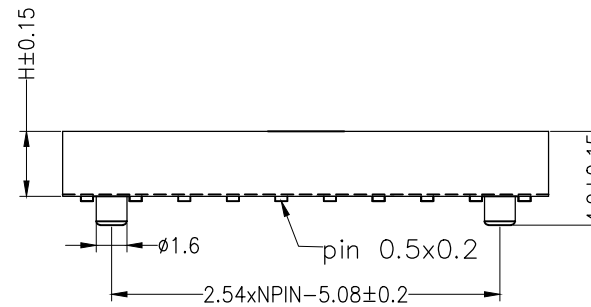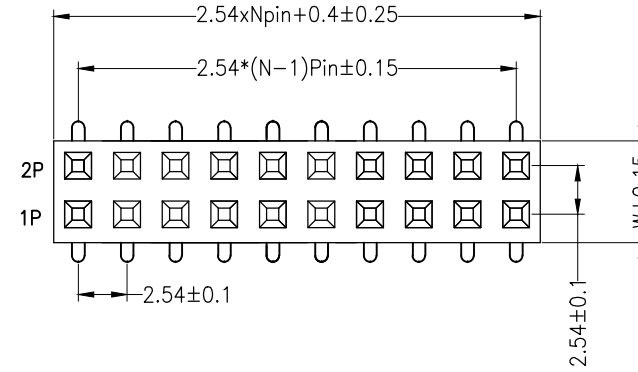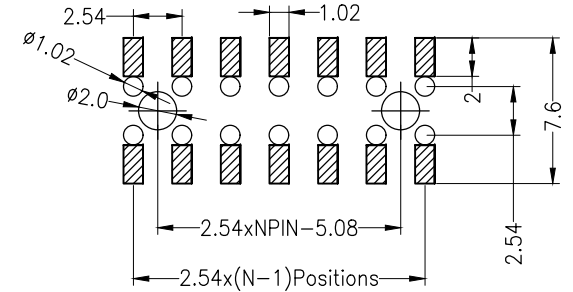

W= With Post

Ordering Information

F 3 P 2 16 3 5 01 1 1056
 产品类型 间距 塑胶高度 排数 单排PIN数 产品形态 塑胶材料 电镀厚度 包装方式 序列号
 F=排母 3=2.54 P=3.55 2=双排 1~40P 3=SMT 5=PA6T 00=常规 1=管装 2=卷装 3=盒装 4=袋装 5=盒装
 01="01-1u" 02="2u" 03="3u"

Dimension antitheses list					
ITEM	PB	PC	PW	H	W
001	3.9		6.6	3.5	5.0
002					

FH-01056

OPERATION

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW
 CHECK
 APPROVE

SCALE
 FIT
 UNIT
 mm
 SIZE
 A4
 SHEET
 1/1
 PROJ.

深圳市连盛精密连接器有限公司

PART NO. F3P216350111056

TITLE: 2.54FH H=3.55 W=5.0 2*16P SMT=6.6 总高3.90 U型 AU1U 青铜 PA6T 带柱 ø1.6 H1.5

A0	2018.12.25	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Liansheng](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)
[803-43-024-10-001000](#)