





ROHS

MATERIALS
 Housing: Plastic Thermoplastic, PA9T, UL94V-0, Black
 Contact Material: Copper Alloy Gold Selective Plated
 Front Shell: Zinc Alloy, Nickel Plated Over Copper
 RoHS Compliant


ELECTRICAL CHARACTERISTICS
 Rated Current: 1.0AMP
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 500MΩ Min
 Contact Resistance: 35mΩ Max
 Operation Temperature: -55° c to +105° c

材质
 胶芯: 塑胶 PA9T UL94V-0, 黑色
 端子: 铜合金, 镀半金锡
 前壳: 锌合金, 镀镍

规格
 耐电流: 1安培
 最大耐电压: 交流500伏特
 绝缘电阻: 最小值大于500百万欧姆
 接触电阻: 最大值小于35千分之一欧姆
 工作温度: -55℃到+105℃

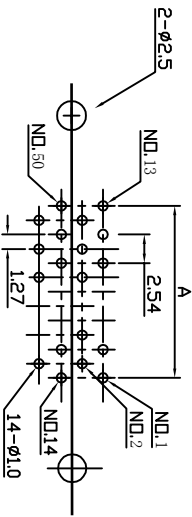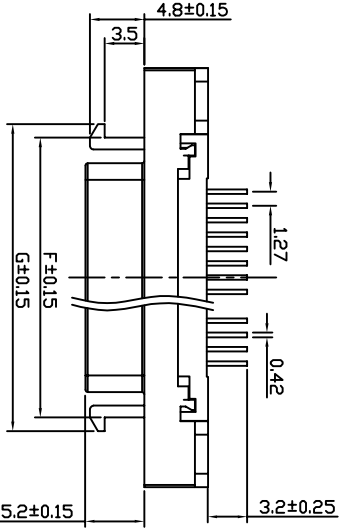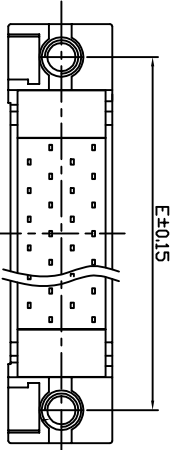

PCB LAYOUT

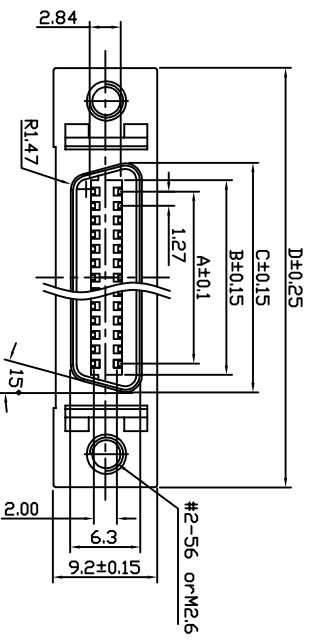

No. of Pin	DIMENSIONS						
	A	B	C	D	E	F	G
50	30.48	32.45	35.39	52.37	46.5	40.0	41.44

深圳市连盛精密连接器有限公司

PART NO. XHLJQ-00007

TITLE: 信号连接器 母座 SOP DIP

OPERATION		DRAW		SCALE		FIT	
UNIT	mm	UNIT	mm	UNIT	mm	UNIT	mm
X.X	±0.30	X.X	±0.30	A4	1/1		
X.XX	±0.15	CHECK					
X.XXX	±0.10						
Angle	±3°	APPROVE					
DIM	TOL			PROJ.			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	
1			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
1			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
1			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:

Click to view products by [Liansheng](#) manufacturer:

Other Similar products are found below :

[30-1231](#) [30-528](#) [30-504](#) [30-519](#) [33DVIR-24S1B](#) [47648-2000](#) [2002-400](#) [TC142X](#) [769-103/021-000](#) [1932649-1](#) [CP30200GM3](#) [67881](#)
[HAFBF](#) [HBLBH](#) [HBLBI](#) [HAFBG](#) [HAFBH](#) [HAGBF](#) [HAGBG](#) [HAGBI](#) [HAGBJ](#) [HBLBJ](#) [AABIE](#) [AABIF](#) [AABIG](#) [AABIH](#) [AABII](#) [AABIJ](#)
[AABIK](#) [AABIL](#) [AACBE](#) [AACBF](#) [AACBG](#) [ABIBF](#) [ABIBG](#) [ABIBH](#) [42154](#) [AACBH](#) [AACBI](#) [AACBJ](#) [AACBK](#) [AACBL](#) [AAIBD](#) [AAIBF](#)
[AAIBH](#) [AAIBI](#) [AANBF](#) [AANBG](#) [AANBH](#) [AANBI](#)