
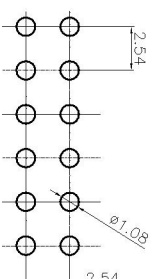
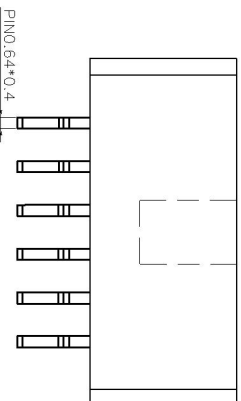

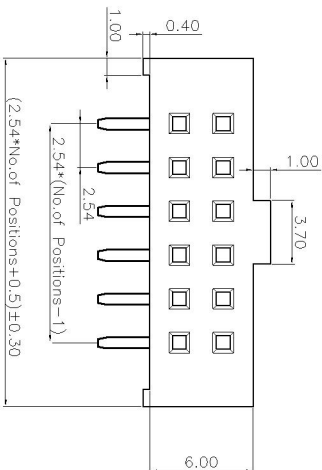
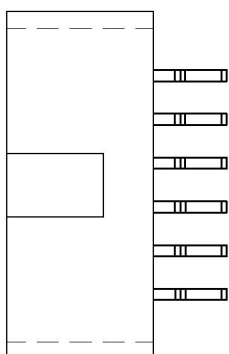


### 1. Specifications

Current Rating: 1Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 300V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

### 2. Materials

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 PBT  
 All materials must be GP materials 1U”

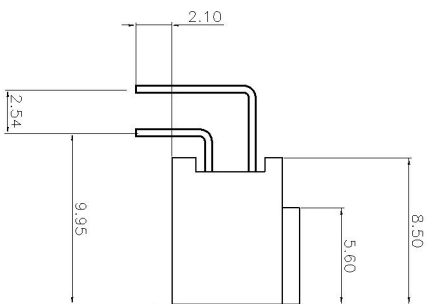

RECOMMENDED PCB LAYOUT  
 TOLERANCE:±0.05

GENERAL TOL.		DRAW NO.		TWT - E000038		DATE		P/N: XDHF-AS0254-0852*6P	
X.XX		±0.30		DESIGN: Mike, Lee		10/16'14		SIZE: A4	
X.XXX		±0.25		CHECK:				SHEET: 1 OF 1	
X.X		±0.5		APPROVED:				SCALE: N/A	
X.X"									
REV.	ECN NO.	INITIAL RELEASE	12/26'07	DATE	Mike, Lee	DESIGN		REV.	A0
DESCRIPTION									

深圳市连欣科技有限公司

DRAW NAME: 排母PH2.54\*8.5 2\*6P 垫高0.4MM 双弯90度

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Lian Xin](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)