


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
REV	ECNNO	LOCATIONS	DESCRIPTION	DATE	REVISER	

($\phi 3.50\text{mm}$ 4 POLE PLUG DETAIL DRAWING)

- 1.Specification:
- 1.1 Voltage Rating: 250V
 - 1.2 Current rating: 2 A Max.
 - 1.3 Dielectric withstanding voltage: 250 V(ac) for 1 mW.Min.
 - 1.4 Contact resistance: 30 mW Max.
 - 1.5 Insulation resistance: 500 M $^{\circ}\text{C}$
 - 1.6 Durability: 5000 Cycles
 - 1.7 Temperature range: $-40^{\circ}\text{C}\sim 80^{\circ}\text{C}$

2	Contact	C5191 T=0.20	50 μ Min. Ni underplated all;1~3 μ Min.Au plated Contact Area&Solderetails
1	Housing	PPA;Black	UL 94V-0
No.	Name	Material	Finish
DWC NO:		MATERIAL: MATERIAL	
PJ0354-B45011			
MODEL NO:		FINISH: FINISH	
MOLDNO.			
UNIT:	UNIT	SIZE: SIZE	COLOR: COLOR
TOLERANCE UNSPECIFIED	DR:	DR	
.x .X	CHK:	TITLE: PJ-342 板上型双柱耳机插座4.5H	
.xx .XX	APP:	PART NO: XDJK-0354-060	
.xxx .XXX		SCALE: SCALE	REV: REV
ANG. ANG.		SHEET: SHEET	

深圳市连欣科技有限公司

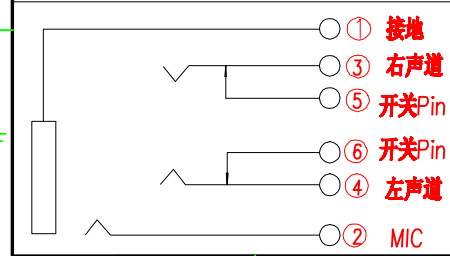

Recommended PCB Layout

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Phone Connectors](#) category:

Click to view products by [Lian Xin](#) manufacturer:

Other Similar products are found below :

[R4F](#) [14412GX](#) [E12BPKG](#) [MT333X](#) [171-3302-EX](#) [NC3MG-V](#) [NP2RX-AU-SILENT-D](#) [JM2PB-AU BULK](#) [S2674](#) [280L](#) [RJ5VI-S](#) [TM1R-AU](#) [TM2PJ-AU](#) [TM2PJ-AU BULK](#) [TS3PBJ-AU](#) [TS3PBMJ-AU](#) [MP-101](#) [54B](#) [T10711](#) [MT334F](#) [NJ3FP6F-P](#) [NPX-PROMO](#) [JS3PB-AU BULK](#) [XMT332A](#) [114BPCSX](#) [CMT334B](#) [AA0-A4830-A00](#) [PJ-218](#) [PJ-320-3P SMT](#) [PJ-321A](#) [PJ-393-8P](#) [KH-PJ-327D-SMT](#) [PJ-320D](#) [PJ-3106M](#) [PJ-376](#) [PJ-368](#) [PJ-624](#) [PJ-339](#) [PJ-3200B](#) [RCJ-017](#) [PJ-307B-1.3-01](#) [PJ-324](#) [PJ-324M](#) [PJ-313D](#) [PJ-313](#) [PJ-227](#) [PJ-3106AC1](#) [PJ-3505A](#) [PJ-321](#) [KH-PJ-307-5P](#)