
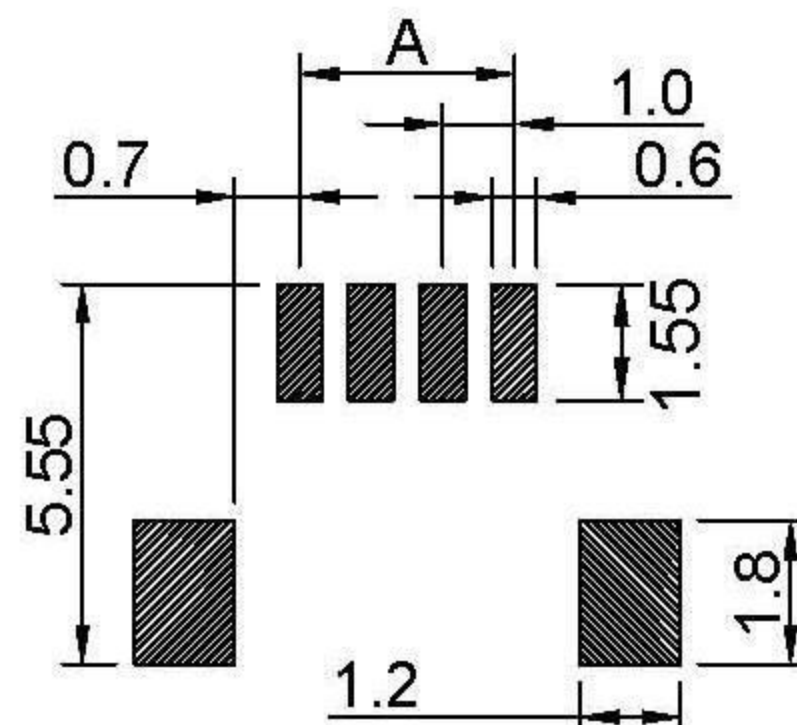




RoHS

**SPECIFICATIONS**

Current rating: 1A AC, DC  
 Voltage rating: 50V AC,DC  
 Temperature range: -25°C ~ +85°C  
 Insulation resistance: 500M Ω/ min.  
 Withstanding voltage: 500V AC/ minute.  
 Contact resistance: 20m Ω/ max.

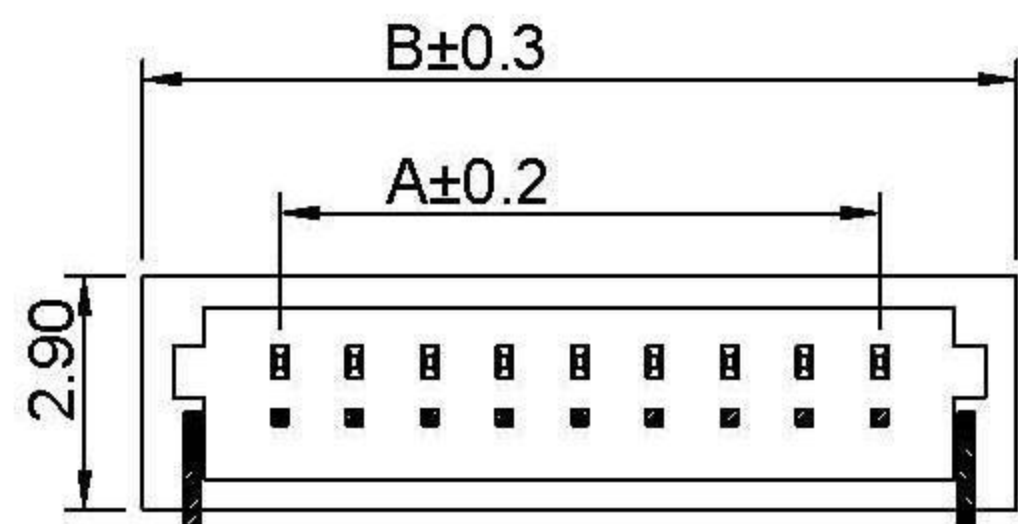

**P.C.B LAYOUT**

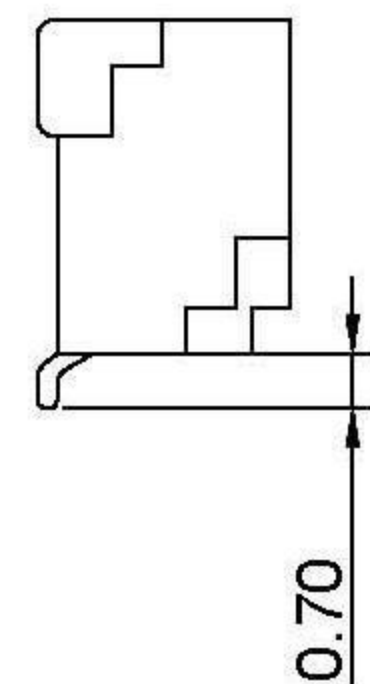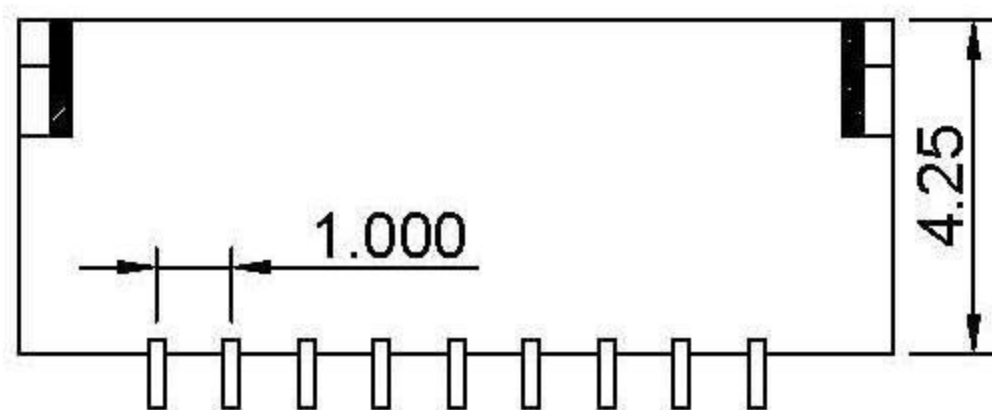

MATERIAL: PIN: PHOSPHOR BRONZE/TIN -PLATED  
 WAFER : NYLON UL94V-0  
 MATES WITH ZYA1001H SERIES SINGLE ROW HOUSING

版次	修訂內容	修訂者	修訂日期

PIN	PART No.	Dimension mm	
		A	B
2	A1001-FRS02	1.0	4.0
3	A1001-FRS03	2.0	5.0
4	A1001-FRS04	3.0	6.0
5	A1001-FRS05	4.0	7.0
6	A1001-FRS06	5.0	8.0
7	A1001-FRS07	6.0	9.0
8	A1001-FRS08	7.0	10.0
9	A1001-FRS09	8.0	11.0
10	A1001-FRS10	9.0	12.0
11	A1001-FRS11	10.0	13.0
12	A1001-FRS12	11.0	14.0
13	A1001-FRS13	12.0	15.0
14	A1001-FRS14	13.0	16.0
15	A1001-FRS15	14.0	17.0
16	A1001-FRS16	15.0	18.0
17	A1001-FRS17	16.0	19.0
18	A1001-FRS18	17.0	20.0
19	A1001-FRS19	18.0	21.0
20	A1001-FRS20	19.0	22.0

項次	品名	規格說明	圓圖編號	用量
	TERMINAL			
	空主體			
	接力片			

圖面編號	A1001FRS-ZY01
一般公差	.X±0.15 .XX±0.05 <±1°
頁次	10F1
繪圖/日期	
設計/日期	
核對/日期	

<p><b>深圳市连欣科技有限公司</b></p>			
<p>圖面名稱: 1.0 SMT 90° Wafer</p>			
<p>產品編號: XDWF-0910-**P</p>			
單位	mm	比例	版次 A/0

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Lian Xin](#) manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)  
[820-22-008-30-001101](#) [821-22-002-10-001101](#)