



APPROVAL SHEET

Issued No. :

DESCRIPTION : DIP 11.1*4.68 METAL CAN CRYSTAL

NOMINAL FREQ. : 4.194304MHz

TAITIEN P/N : _____

TAITIEN MODEL : 49SS-4.194304-20-10-10/B

REVISION : 1

DATE : 07/11/2017

QA	Checked	Prepared

CUSTOMER : _____

CUSTOMER P/N : _____

Customer Signature
Approved:
Date:



CONTENT

SPECIFICATIONS	PAGE
ELECTRICAL SPECIFICATIONS	4~5
PRODUCT DIMENSIONS	6
PRODUCT IDENTIFICATION (MARKING)	6
PACKAGE INFORMATION	7

ELECTRICAL SPECIFICATIONS

	Parameter	Min.	Typ.	Max.	Units	Test Condition
1-1	Nominal Frequency	4.194304			MHz	
1-2	Frequency Tolerance.	-10		+10	ppm	at 25°C +/-2°C
1-3	Operating Temperature range	-40		+85	°C	
1-4	Storage Temperature range	-55		+125	°C	
1-5	Temperature Characteristics	-30		+30	ppm	-40°C to +85°C
1-6	Nominal Load Capacitance	20			pF	
1-7	Series Resistance			120	Ω	
1-8	Shunt Capacitance			7	pF	
1-9	Motion Capacitance				fF	
1-10	Motion Inductance				mH	
1-11	Q factor				K	
1-12	Spurious Response				dB	
1-13	Frequency Pull ability				ppm/pF	
1-14	C0/C1 Ratio					
1-15	Aging	-5		+5	ppm/year	
1-16	Insulation Resistance	500MΩ Min. @ DC100V				
1-17	Nominal Drive Level	10			μW	into 40Ω
1-18	Dependency Condition				μW	
1-19	Drive Level Dependency Resistance Max. Minus Min.				Ω	
1-20	Drive Level Dependency Frequency Max. Minus Min.				ppm	
1-21	Drive Level Dependency Resistance Max.				Ω	



利 明

■ CUSTOMER SPECIAL REQUIREMENT

2	
---	--


■ ENVIRONMENTAL

	Parameter	Reference Std.	Test Condition
3-1	Vibration Test	MIL-STD-883 2007 Condition A	10~2000Hz, 1.52mm, 20g, each axis for 4 hrs
		JESD22-B103 Condition 1	
3-2	Thermal Shock	MIL-STD-883 1010 Condition B	-55°C, 125°C; soak time is 10 mins, with total 200 cycles
		JESD22-A104 Condition B	
3-3	Mechanical Shock	MIL-STD-883 2002 Condition B	1500G, half-sine, 0.5ms, each axis for 3 times.
		JESD22-B104 Condition B	

■ PRODUCT DIMENSIONS

➤ DIMENSIONS


LEAD SIZE:	
	L(mm)
■	13.2+/-1
□	7.5+/-1
□	3.6+/-0.2
□	3.8+/-0.3
□	4.5+/-0.5
□	16.0+/-1
□	4.0+/-0.5
□	Refer tp SPEC. Sheet

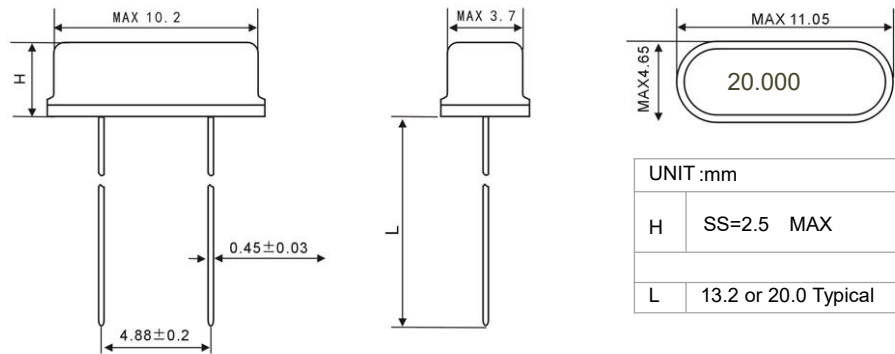


UNIT :mm	
H	SS=2.5 MAX
L	13.2 or 20.0 Typical

■ PRODUCT IDENTIFICATION (MARKING)

➤ PROCEDURE: LASER

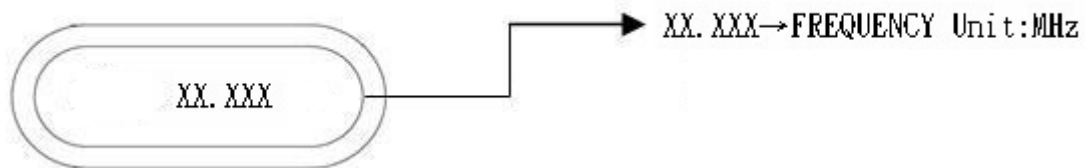

➤ FOR EXAMPLE:

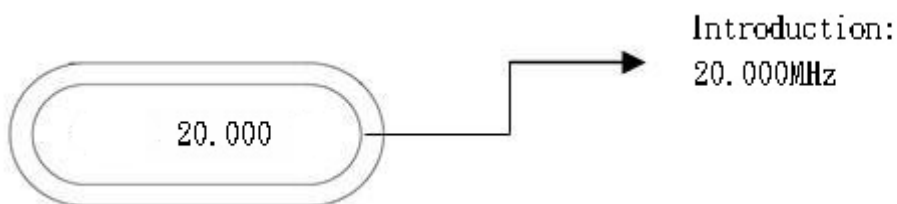




利 明

■ PACKAGE INFORMATION

FOR METAL CAN & TUNING FORK CRYSTAL PACKAGE

A.

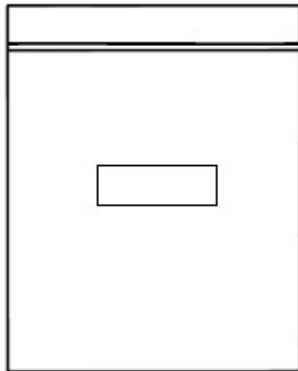


- 200pcs Plastic Bag
 500pcs Plastic Bag
 1000pcs Plastic Bag
 2000pcs Plastic Bag

B.



- Below 200pcs Plastic Bag

FOR METAL CAN & TUNING FORK CRYSTAL BOX

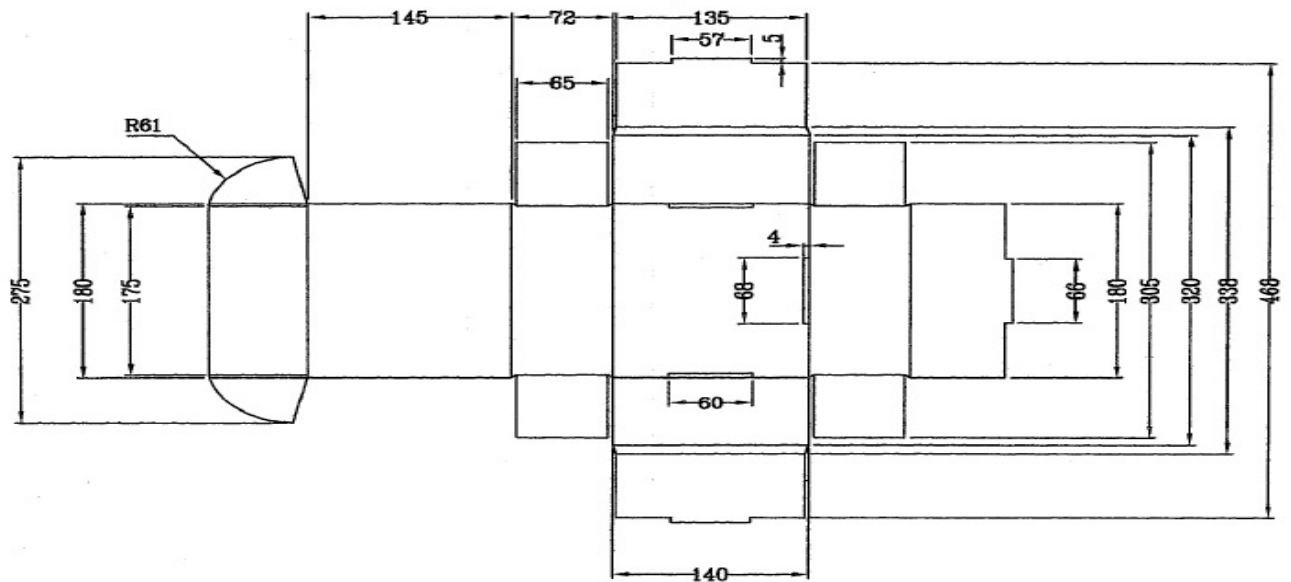

MATERIAL : A3A
 TOLERANCE : ± 0.5
 UNIT : mm
 t : 2 mm(-0.1/+0.3)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [Liming](#) manufacturer:

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [CX2520DB16000H0HPQCC](#) [MMCC2R32.7680KHZ](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#) [FP0800018](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#)