




8136-8168

**Precision Diagonal Cutters with
Tapered Head & Relieved & ESD Safe
Handle**



PRODUCT DETAILS

- 80 series precision diagonal cutters with tapered & relieved head
- ESD safe mono-material handles with return spring
- Micro-bevel, flush & ultra-flush cut
- The stated cutting capacity is for copper wire
- Suitable for cutting copper
- High performance alloy steel
- Phosphate finish
- Numerically controlled machine grinding ensures edge angle accuracy and contact, increasing tool reliability and consistency
- Precision induction hardened edges 63-65 HRC
- Screw joint minimises friction and maximises alignment of cutting edges
- Ideal for use in confined spaces and for rework

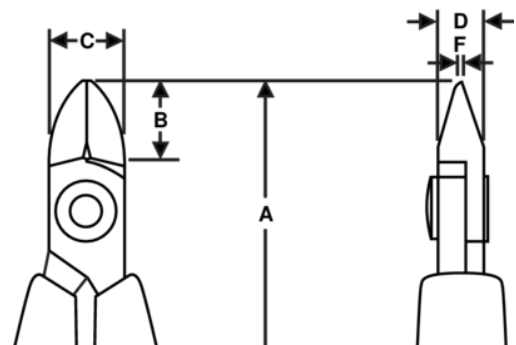

PRODUCT ATTRIBUTES

Product: 8136

	Tapered & Relieved		XS	A	108.0 mm
A	4.25 in	B	8 mm	B	0.31 in
C	8 mm	C	0.31 in	D	5 mm
D	0.2 inch	F	0.6 mm	F	0.02 in
	0.1-0.8 mm		0.004-0.03 in		Micro-Bevel®
g	43 g		Ω		Dissipative

Product: 8137

	Tapered & Relieved		XS	A	108.0 mm
A	4.25 in	B	8 mm	B	0.31 in
C	8 mm	C	0.31 in	D	5 mm
D	0.2 inch	F	0.6 mm	F	0.02 in
	0.1-0.8 mm		0.004-0.03 in		Flush
g	43 g		Ω		Dissipative

Product: 8138

	Tapered & Relieved		XS	A	108.0 mm
A	4.25 in	B	8 mm	B	0.31 in
C	8 mm	C	0.31 in	D	5 mm
D	0.2 inch	F	0.6 mm	F	0.02 in
	0.1-0.5 mm		0.004-0.02 in		Ultra-Flush®
g	43 g		Ω		Dissipative

Product: 8146

	Tapered & Relieved		S	A	110.5 mm
A	4.33 in	B	10 mm	B	0.39 in
C	10 mm	C	0.39 in	D	6 mm
D	0.24 inch	F	0.8 mm	F	0.03 in
	0.2-1.0 mm		0.01-0.04 in		Micro-Bevel®
g	46 g		Ω		Dissipative

Product: 8147

	Tapered & Relieved		S	A	110.5 mm
A	4.33 in	B	10 mm	B	0.39 in
C	10 mm	C	0.39 in	D	6 mm
D	0.24 inch	F	0.8 mm	F	0.03 in
	0.1-1.0 mm		0.01-0.04 in		Flush
g	46 g		Ω		Dissipative

Product: 8148

	Tapered & Relieved		S	A	110.5 mm
A	4.33 in	B	10 mm	B	0.39 in
C	10 mm	C	0.39 in	D	6 mm
D	0.24 inch	F	0.8 mm	F	0.03 in
	0.1-0.8 mm		0.00-0.03 in		Ultra-Flush®
g	45 g		Ω		Dissipative

Product: 8156

	Tapered & Relieved		M	A	112.5 mm
A	4.43 in	B	12.5 mm	B	0.5 in
C	12.5 mm	C	0.50 in	D	6 mm
D	0.24 inch	F	1.2 mm	F	0.05 in
	0.3-1.25 mm		0.01-0.05 in		Micro-Bevel®
g	49 g		Ω		Dissipative

Product: 8157

	Tapered & Relieved		M	A	112.5 mm
A	4.43 in	B	12.5 mm	B	0.5 in
C	12.5 mm	C	0.50 in	D	6 mm
D	0.24 inch	F	1.2 mm	F	0.05 in
	0.2-1.25 mm		0.01-0.05 in		Flush
g	49 g		Ω		Dissipative

Product: 8158

	Tapered & Relieved		M	A	112.5 mm
A	4.43 in	B	12.5 mm	B	0.5 in
C	12.5 mm	C	0.50 in	D	6 mm
D	0.24 inch	F	1.2 mm	F	0.05 in
	0.2-1.0 mm		0.01-0.04 in		Ultra-Flush®
g	49 g		Ω		Dissipative

Product: 8166L

	Tapered & Relieved		L	A	125.0 mm
A	4.92 in	B	16 mm	B	0.63 in
C	16 mm	C	0.63 in	D	8 mm
D	0.31 inch	F	1.6 mm	F	0.06 in
	0.4-1.5 mm		0.02-0.06 in		Micro-Bevel®
g	52 g		Ω		Dissipative

Product: 8167L

	Tapered & Relieved		L	A	125.0 mm
A	4.92 in	B	16 mm	B	0.63 in
C	16 mm	C	0.63 in	D	8 mm
D	0.31 inch	F	1.6 mm	F	0.06 in
	0.3-1.5 mm		0.01-0.06 in		Flush
g	52 g		Ω		Dissipative

Product: 8168L

	Tapered & Relieved		L	A	125.0 mm
A	4.92 in	B	16 mm	B	0.63 in
C	16 mm	C	0.63 in	D	8 mm
D	0.31 inch	F	1.6 mm	F	0.06 in
	0.3-1.25 mm		0.01-0.05 in		Ultra-Flush®
g	51 g		Ω		Dissipative

Product: 8148 CO

	Tapered & Relieved		S	A	110.0 mm
A	4.33 in	B	10 mm	B	0.39 in
C	10 mm	C	0.39 in	D	6 mm
D	0.24 inch	F	0.8 mm	F	0.03 in
	0.1-0.8 mm		0.00-0.03 in		Ultra-Flush®
g	45 g		Ω		Conductive

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pliers & Tweezers](#) category:

Click to view products by [Lindstrom](#) manufacturer:

Other Similar products are found below :

[0026](#) [T0058765801](#) [80](#) [76C](#) [378MN](#) [L4VN](#) [LN54VN](#) [NN7776VN](#) [54CGVN](#) [SN55VN](#) [DRP10N](#) [0036](#) [PN 5050/21D](#) [TR 20 VM](#) [TR 25 A](#)
[505BGC](#) [622TX](#) [43450](#) [8140 CO](#) [8150 CO](#) [8165 CO](#) [32BSA25](#) [53CSA](#) [5BSAF](#) [5FSA](#) [5MBS](#) [M4AS](#) [017610101](#) [PN 5025](#) [65516300](#) [1-](#)
[84-199](#) [YT-2469](#) [011640100](#) [010480315](#) [503 618 3](#) [PGT435](#) [5000522](#) [011770113](#) [011770101](#) [CPE.A4](#) [T3781](#) [189A.17VE](#) [PPR 5003 D](#)
[131 010 2](#) [40603GP](#) [011780102](#) [45705](#) [CPES](#) [6151](#) [181A.18CPE](#)