




8133-8165

## ERGO™ Precision Diagonal Cutters with Tapered Head



### PRODUCT DETAILS

- 80 series precision diagonal cutters with tapered head
- ESD safe mono-material handles with return spring
- Micro-bevel, flush & ultra-flush cut
- The stated cutting capacity is for copper wire
- Suitable for cutting copper
- High performance alloy steel
- Phosphate finish
- Numerically controlled machine grinding ensures edge angle accuracy and contact, increasing tool reliability and consistency
- Precision induction hardened edges 63-65 HRC
- Screw joint minimises friction and maximises alignment of cutting edges
- Ideal for assembly work where accessibility is a consideration
- CO standard handle shape in conductive material

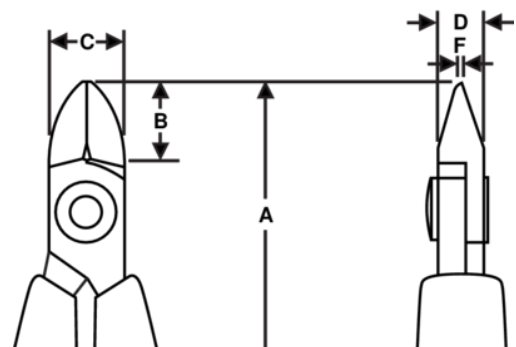

# PRODUCT ATTRIBUTES

<b>Product: 8133</b>			
Tapered	XS	<b>A</b>	108.0 mm
<b>A</b> 4.25 in	<b>B</b> 8 mm	<b>B</b>	0.31 in
<b>C</b> 8 mm	<b>C</b> 0.31 in	<b>D</b>	5 mm
<b>D</b> 0.2 inch	<b>F</b> 0.8 mm	<b>F</b>	0.03 in
0.2-1.0 mm	0.008-0.04 in		Micro-Bevel
43 g			Dissipative
<b>Product: 8134</b>			
Tapered	XS	<b>A</b>	108.0 mm
<b>A</b> 4.25 in	<b>B</b> 8 mm	<b>B</b>	0.31 in
<b>C</b> 8 mm	<b>C</b> 0.31 in	<b>D</b>	5 mm
<b>D</b> 0.2 inch	<b>F</b> 0.8 mm	<b>F</b>	0.03 in
0.1-0.8 mm	0.004-0.03 in		Flush
43 g			Dissipative
<b>Product: 8135</b>			
Tapered	XS	<b>A</b>	108.0 mm
<b>A</b> 4.25 in	<b>B</b> 8 mm	<b>B</b>	0.31 in
<b>C</b> 8 mm	<b>C</b> 0.31 in	<b>D</b>	5 mm
<b>D</b> 0.2 inch	<b>F</b> 0.8 mm	<b>F</b>	0.03 in
0.1-0.5 mm	0.004-0.02 in		Ultra-Flush
43 g			Dissipative
<b>Product: 8143</b>			
Tapered	S	<b>A</b>	110.0 mm
<b>A</b> 4.33 in	<b>B</b> 10.5 mm	<b>B</b>	0.41 in
<b>C</b> 8 mm	<b>C</b> 0.39 in	<b>D</b>	6 mm
<b>D</b> 0.24 inch	<b>F</b> 0.8 mm	<b>F</b>	0.03 in
0.2-1.25 mm	0.01-0.05 in		Micro-Bevel
46 g			Dissipative
<b>Product: 8144</b>			
Tapered	S	<b>A</b>	110.0 mm
<b>A</b> 4.33 in	<b>B</b> 10.5 mm	<b>B</b>	0.41 in
<b>C</b> 8 mm	<b>C</b> 0.39 in	<b>D</b>	6 mm
<b>D</b> 0.24 inch	<b>F</b> 0.8 mm	<b>F</b>	0.03 in
0.2-1.25 mm	0.01-0.05 in		Flush
46 g			Dissipative
<b>Product: 8145</b>			
Tapered	S	<b>A</b>	110.0 mm
<b>A</b> 4.33 in	<b>B</b> 10.5 mm	<b>B</b>	0.41 in
<b>C</b> 8 mm	<b>C</b> 0.39 in	<b>D</b>	6 mm
<b>D</b> 0.24 inch	<b>F</b> 0.8 mm	<b>F</b>	0.03 in
0.1-1.0 mm	0.00-0.04 in		Ultra-Flush
46 g			Dissipative
<b>Product: 8153</b>			
Tapered	M	<b>A</b>	112.5 mm
<b>A</b> 4.43 in	<b>B</b> 13 mm	<b>B</b>	0.51 in
<b>C</b> 12.5 mm	<b>C</b> 0.50 in	<b>D</b>	6 mm
<b>D</b> 0.24 inch	<b>F</b> 1.2 mm	<b>F</b>	0.05 in
0.3-1.6 mm	0.01-0.06 in		Micro-Bevel
49 g			Dissipative
<b>Product: 8154</b>			
Tapered	M	<b>A</b>	112.5 mm
<b>A</b> 4.43 in	<b>B</b> 13 mm	<b>B</b>	0.51 in
<b>C</b> 12.5 mm	<b>C</b> 0.50 in	<b>D</b>	6 mm
<b>D</b> 0.24 inch	<b>F</b> 1.2 mm	<b>F</b>	0.05 in
0.2-1.6 mm	0.01-0.06 in		Flush
49 g			Dissipative
<b>Product: 8155</b>			
Tapered	M	<b>A</b>	112.5 mm
<b>A</b> 4.43 in	<b>B</b> 13 mm	<b>B</b>	0.51 in
<b>C</b> 12.5 mm	<b>C</b> 0.50 in	<b>D</b>	6 mm
<b>D</b> 0.24 inch	<b>F</b> 1.2 mm	<b>F</b>	0.05 in
0.2-1.25 mm	0.01-0.05 in		Ultra-Flush
49 g			Dissipative
<b>Product: 8163</b>			
Tapered	L	<b>A</b>	125.0 mm
<b>A</b> 4.92 in	<b>B</b> 16 mm	<b>B</b>	0.63 in
<b>C</b> 16 mm	<b>C</b> 0.63 in	<b>D</b>	8 mm
<b>D</b> 0.31 inch	<b>F</b> 1.6 mm	<b>F</b>	0.06 in
0.4-2.0 mm	0.02-0.08 in		Micro-Bevel
88 g			Dissipative
<b>Product: 8164</b>			
Tapered	L	<b>A</b>	125.0 mm
<b>A</b> 4.92 in	<b>B</b> 16 mm	<b>B</b>	0.63 in
<b>C</b> 16 mm	<b>C</b> 0.63 in	<b>D</b>	8 mm
<b>D</b> 0.31 inch	<b>F</b> 1.6 mm	<b>F</b>	0.06 in
0.3-2.0 mm	0.01-0.08 in		Flush
88 g			Dissipative
<b>Product: 8165</b>			
Tapered	L	<b>A</b>	125.0 mm
<b>A</b> 4.92 in	<b>B</b> 16 mm	<b>B</b>	0.63 in
<b>C</b> 16 mm	<b>C</b> 0.63 in	<b>D</b>	8 mm
<b>D</b> 0.31 inch	<b>F</b> 1.6 mm	<b>F</b>	0.06 in
0.3-1.6 mm	0.01-0.06 in		Ultra-Flush
88 g			Dissipative
<b>Product: 8144 CO</b>			
Tapered	S	<b>A</b>	110.0 mm
<b>A</b> 4.33 in	<b>B</b> 10.5 mm	<b>B</b>	0.41 in
<b>C</b> 10 mm	<b>C</b> 0.39 in	<b>D</b>	6 mm
<b>D</b> 0.24 inch	<b>F</b> 0.8 mm	<b>F</b>	0.03 in
0.2-1.25 mm	0.01-0.05 in		Flush
46 g			Conductive
<b>Product: 8154 CO</b>			
Tapered	M	<b>A</b>	112.5 mm
<b>A</b> 4.43 in	<b>B</b> 13 mm	<b>B</b>	0.51 in
<b>C</b> 12.5 mm	<b>C</b> 0.50 in	<b>D</b>	6 mm
<b>D</b> 0.24 inch	<b>F</b> 1.2 mm	<b>F</b>	0.05 in
0.2-1.6 mm	0.01-0.06 in		Flush
49 g			Conductive
<b>Product: 8163 CO</b>			
Tapered	L	<b>A</b>	125.0 mm
<b>A</b> 4.92 in	<b>B</b> 16 mm	<b>B</b>	0.63 in
<b>C</b> 16 mm	<b>C</b> 0.63 in	<b>D</b>	8 mm
<b>D</b> 0.31 inch	<b>F</b> 1.6 mm	<b>F</b>	0.06 in
0.4-2.0 mm	0.02-0.08 in		Micro-Bevel
88 g			Conductive
<b>Product: 8165 CO</b>			
Tapered	L	<b>A</b>	125.0 mm
<b>A</b> 4.92 in	<b>B</b> 16 mm	<b>B</b>	0.63 in
<b>C</b> 16 mm	<b>C</b> 0.63 in	<b>D</b>	8 mm
<b>D</b> 0.31 inch	<b>F</b> 1.6 mm	<b>F</b>	0.06 in
0.3-1.6 mm	0.01-0.06 in		Ultra-Flush
88 g			Conductive

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pliers & Tweezers](#) category:*

*Click to view products by [Lindstrom](#) manufacturer:*

Other Similar products are found below :

[0026](#) [T0058765801](#) [80](#) [76C](#) [378MN](#) [L4VN](#) [LN54VN](#) [NN7776VN](#) [54CGVN](#) [SN55VN](#) [DRP10N](#) [0036](#) [PN 5050/21D](#) [TR 20 VM](#) [TR 25 A](#)  
[505BGC](#) [622TX](#) [43450](#) [8140 CO](#) [8150 CO](#) [8165 CO](#) [32BSA25](#) [53CSA](#) [5BSAF](#) [5FSA](#) [5MBS](#) [M4AS](#) [017610101](#) [PN 5025](#) [65516300](#) [1-](#)  
[84-199](#) [YT-2469](#) [011640100](#) [010480315](#) [503 618 3](#) [PGT435](#) [5000522](#) [011770113](#) [011770101](#) [CPE.A4](#) [T3781](#) [189A.17VE](#) [PPR 5003 D](#)  
[131 010 2](#) [40603GP](#) [011780102](#) [45705](#) [CPES](#) [6151](#) [181A.18CPE](#)