




RX 8133-RX 8165 ERGO™ Precision Diagonal Cutters with Tapered Head







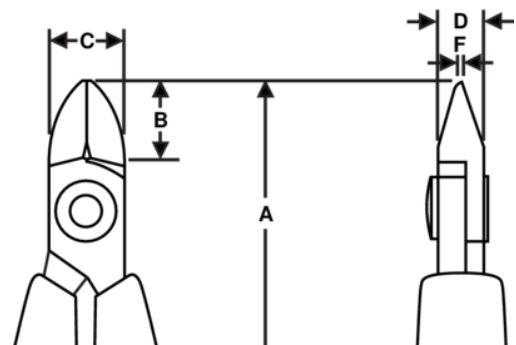


PRODUCT DETAILS

- Precision Tapered Head diagonal cutters developed according to the scientific ERGO™ process, Tapered Head
- ERGO™ handles with two-component combination and thermoplastic surface for comfortable grip, on tough polypropylene core for rigidity
- Micro-bevel, flush & ultra-flush cut
- The stated cutting capacity is for copper wire
- Cutting capacity: 0.1-0.8 mm to 0.2-1.25 mm
- High performance alloy steel
- Phosphate finish
- Numerically controlled machine grinding ensures edge angle accuracy and contact, increasing tool reliability and consistency
- Precision induction-hardened edges 63-65 HRC
- Screw joint minimises friction and maximises alignment of cutting edges
- ESD safe handles in two-component synthetic material
- Bio spring limits tension through the working cycle of the tool and can be adjusted to 3 different positions or removed
- Ideal for assembly work where accessibility is a consideration










PRODUCT ATTRIBUTES








Product: **RX8133**

| | | | | | |
|---|----------|---|-------------|---|--------------|
|  | Tapered |  | XS | A | 108.0 mm |
| A | 4.25 in | B | 8 mm | B | 0,31 in |
| C | 8 mm | C | 0.31 in | D | 5 mm |
| D | 0,2 inch | F | 0,8 mm | F | 0,03 in |
|  | |  | |  | Micro-Bevel® |
|  | 66 g |  | Dissipative | | |








Product: **RX8134**

| | | | | | |
|---|----------|---|-------------|---|----------|
|  | Tapered |  | XS | A | 108.0 mm |
| A | 4.25 in | B | 8 mm | B | 0,31 in |
| C | 8 mm | C | 0.31 in | D | 5 mm |
| D | 0,2 inch | F | 0,8 mm | F | 0,03 in |
|  | |  | |  | Flush |
|  | 66 g |  | Dissipative | | |








Product: **RX8135**

| | | | | | |
|---|----------|---|-------------|---|--------------|
|  | Tapered |  | XS | A | 108.0 mm |
| A | 4.25 in | B | 8 mm | B | 0,31 in |
| C | 8 mm | C | 0.31 in | D | 5 mm |
| D | 0,2 inch | F | 0,8 mm | F | 0,03 in |
|  | |  | |  | Ultra-Flush® |
|  | 66 g |  | Dissipative | | |








Product: **RX 8143**

| | | | | | |
|---|-------------|---|--------------|---|--------------|
|  | Tapered |  | S | A | 135.5 mm |
| A | 5.25 in | B | 10,5 mm | B | 0,41 in |
| C | 8 mm | C | 0.39 in | D | 6 mm |
| D | 0,24 inch | F | 0,8 mm | F | 0,03 in |
|  | 0.2-1.25 mm |  | 0.01-0.05 in |  | Micro-Bevel® |
|  | 68 g |  | Dissipative | | |








Product: **RX 8144**

| | | | | | |
|---|-------------|---|--------------|---|----------|
|  | Tapered |  | S | A | 135.5 mm |
| A | 5.25 in | B | 10,5 mm | B | 0,41 in |
| C | 8 mm | C | 0.39 in | D | 6 mm |
| D | 0,24 inch | F | 0,8 mm | F | 0,03 in |
|  | 0.1-1.25 mm |  | 0.00-0.05 in |  | Flush |
|  | 68 g |  | Dissipative | | |








Product: **RX 8145**

| | | | | | |
|---|------------|---|--------------|---|--------------|
|  | Tapered |  | S | A | 135.5 mm |
| A | 5.25 in | B | 10,5 mm | B | 0,41 in |
| C | 8 mm | C | 0.39 in | D | 6 mm |
| D | 0,24 inch | F | 0,8 mm | F | 0,03 in |
|  | 0.1-1.0 mm |  | 0.00-0.04 in |  | Ultra-Flush® |
|  | 68 g |  | Dissipative | | |








Product: **RX 8153**

| | | | | | |
|---|------------|---|--------------|---|--------------------------|
|  | Tapered |  | M | A | 138.0 mm |
| A | 5.30 in | B | 13 mm | B | 0,51 in |
| C | 12,5 mm | C | 0.49 in | D | 6 mm |
| D | 0,24 inch | F | 1,2 mm | F | 0,05 in |
|  | 0.3-1.6 mm |  | 0.01-0.06 in |  | Micro-Bevel [®] |
|  | 71 g |  | Dissipative | | |








Product: **RX 8154**

| | | | | | |
|---|------------|---|--------------|---|----------|
|  | Tapered |  | M | A | 138.0 mm |
| A | 5.30 in | B | 13 mm | B | 0,51 in |
| C | 12,5 mm | C | 0.49 in | D | 6 mm |
| D | 0,24 inch | F | 1,2 mm | F | 0,05 in |
|  | 0.2-1.6 mm |  | 0.01-0.06 in |  | Flush |
|  | 71 g |  | Dissipative | | |








Product: **RX8155**

| | | | | | |
|---|-------------|---|--------------|---|--------------------------|
|  | Tapered |  | M | A | 138.0 mm |
| A | 5.30 in | B | 13 mm | B | 0,51 in |
| C | 12,5 mm | C | 0.49 in | D | 6 mm |
| D | 0,24 inch | F | 1,2 mm | F | 0,05 in |
|  | 0.2-1.25 mm |  | 0.01-0.05 in |  | Ultra-Flush [®] |
|  | 71 g |  | Dissipative | | |








Product: **RX8163**

| | | | | | |
|---|------------|---|--------------|---|--------------------------|
|  | Tapered |  | L | A | 147.0 mm |
| A | 5.80 in | B | 16 mm | B | 0,63 in |
| C | 16 mm | C | 0.63 in | D | 8 mm |
| D | 0,31 inch | F | 1,6 mm | F | 0,06 in |
|  | 0.4-2.0 mm |  | 0.02-0.08 in |  | Micro-Bevel [®] |
|  | 95 g |  | Dissipative | | |

Product: **RX 8164**

| | | | | | |
|---|------------|---|--------------|---|----------|
|  | Tapered |  | L | A | 147.0 mm |
| A | 5.80 in | B | 16 mm | B | 0,63 in |
| C | 16 mm | C | 0.63 in | D | 8 mm |
| D | 0,31 inch | F | 1,6 mm | F | 0,06 in |
|  | 0.3-2.0 mm |  | 0.01-0.08 in |  | Flush |
|  | 95 g |  | Dissipative | | |

Product: **RX 8165**

| | | | | | |
|---|------------|---|--------------|---|--------------------------|
|  | Tapered |  | L | A | 147.0 mm |
| A | 5.80 in | B | 16 mm | B | 0,63 in |
| C | 16 mm | C | 0.63 in | D | 8 mm |
| D | 0,31 inch | F | 1,6 mm | F | 0,06 in |
|  | 0.3-1.6 mm |  | 0.01-0.06 in |  | Ultra-Flush [®] |
|  | 95 g |  | Dissipative | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pliers & Tweezers](#) category:

Click to view products by [Lindstrom](#) manufacturer:

Other Similar products are found below :

[0026](#) [T0058765801](#) [80](#) [76C](#) [378MN](#) [L4VN](#) [LN54VN](#) [NN7776VN](#) [54CGVN](#) [SN55VN](#) [DRP10N](#) [0036](#) [PN 5050/21D](#) [TR 20 VM](#) [TR 25 A](#)
[505BGC](#) [622TX](#) [43450](#) [8140 CO](#) [8150 CO](#) [8165 CO](#) [32BSA25](#) [53CSA](#) [5BSAF](#) [5FSA](#) [5MBS](#) [M4AS](#) [017610101](#) [PN 5025](#) [65516300](#) [1-](#)
[84-199](#) [YT-2469](#) [011640100](#) [010480315](#) [503 618 3](#) [PGT435](#) [5000522](#) [011770113](#) [011770101](#) [CPE.A4](#) [T3781](#) [189A.17VE](#) [PPR 5003 D](#)
[131 010 2](#) [40603GP](#) [011780102](#) [45705](#) [CPES](#) [6151](#) [181A.18CPE](#)