



SN74LS145

BCD-to-Decimal Decoders/Drivers

Product Specification

Specification Revision History:

| Version | Date | Description |
|------------|---------|-------------|
| 2023-06-A1 | 2023-06 | New |
| | | |
| | | |
| | | |
| | | |



Contents

| | |
|--|-----------|
| 1、 General Description..... | 3 |
| 2、 Block Diagram And Pin Description | 5 |
| 2.1、 Block Diagram | 5 |
| 2.2、 Pin Configurations..... | 5 |
| 2.3、 Pin Description | 6 |
| 2.4、 Function Table..... | 6 |
| 3、 Electrical Parameter | 7 |
| 3.1、 Absolute Maximum Ratings..... | 7 |
| 3.2、 Recommended Operating Conditions | 7 |
| 3.3、 Electrical Characteristics | 8 |
| 3.3.1、 DC Characteristics 1 | 8 |
| 3.3.2、 DC Characteristics 2 | 9 |
| 3.3.3、 AC Characteristics 1 | 10 |
| 3.3.4、 AC Characteristics 2 | 10 |
| 4、 Testing Circuit | 10 |
| 4.1、 AC Testing Circuit | 10 |
| 4.2、 Test Data | 11 |
| 4.3、 AC Testing Waveforms..... | 11 |
| 4.4、 Measurement Points | 11 |
| 5、 Package Information | 12 |
| 5.1、 DIP16 | 12 |
| 5.2、 SOP16 | 13 |
| 5.3、 TSSOP16..... | 14 |
| 6、 Statements And Notes | 15 |
| 6.1、 The name and content of Hazardous substances or Elements in the product | 15 |



1、General Description

The SN74LS145 is a BCD-to-decimal decoders/drivers.

Features:

- Supply voltage range: 2V to 6V
- Temperature range: -40°C to +125°C
- Packaging information: DIP16/SOP16

Ordering Information:

Tube packing specifications:

| Part number | Packaging form | Marking code | Tube quantity | Boxed tube quantity | Boxed quantity | Notes |
|-------------|----------------|--------------|----------------|---------------------|------------------|--|
| SN74LS145N | DIP16 | SN74LS145N | 25 PCS/tube | 40 tube/box | 1000 PCS/box | Dimensions of plastic enclosure: 19.0mm×6.4mm Pin spacing: 2.54mm |
| SN74LS145DR | SOP16 | LS145 | 50 PCS/tube | 200 tube/box | 10000 PCS/box | Dimensions of plastic enclosure: 10.0mm×3.9mm Pin spacing: 1.27mm |

Reel packing specifications:

| Part number | Packaging form | Marking code | Reel quantity | Boxed reel quantity | Notes |
|-------------|----------------|--------------|------------------|---------------------|--|
| SN74LS145DR | SOP16 | LS145 | 2500 PCS/reel | 5000 PCS/box | Dimensions of plastic enclosure: 10.0mm×3.9mm Pin spacing: 1.27mm |

Note: If the physical information is inconsistent with the ordering information, please refer to the actual product.



2、Block Diagram And Pin Description

2.1、Block Diagram


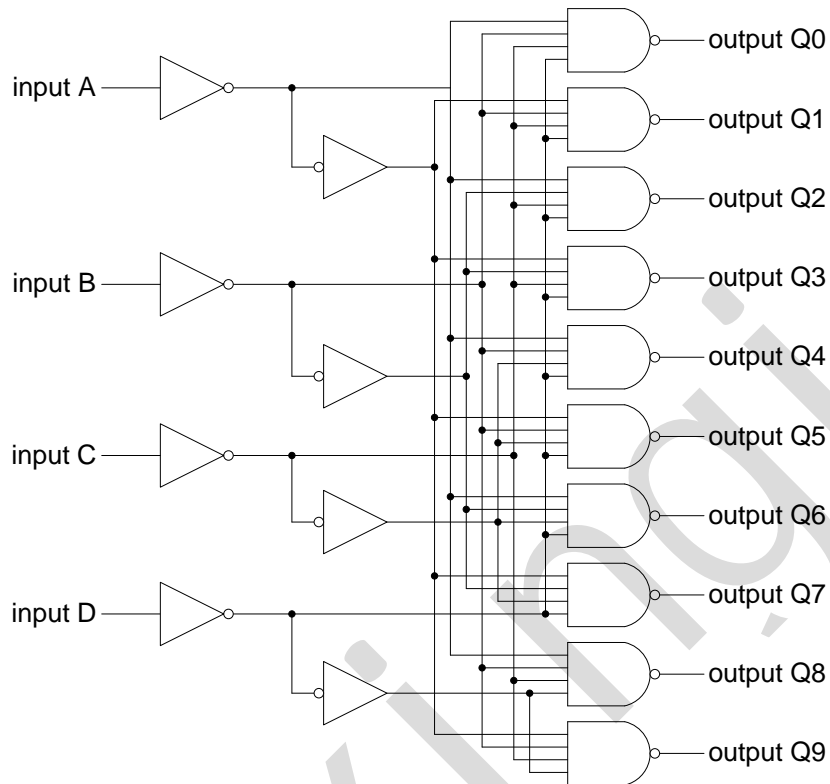


Figure 1. Logic symbol

2.2、Pin Configurations



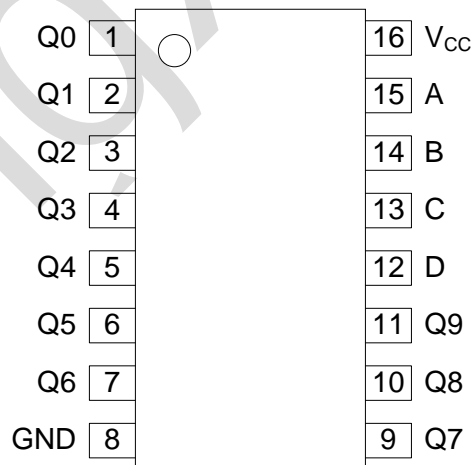

2.3、Pin Description

| Pin No. | Pin Name | Description |
|---------|-----------------|----------------|
| 1 | Q0 | data output |
| 2 | Q1 | data output |
| 3 | Q2 | data output |
| 4 | Q3 | data output |
| 5 | Q4 | data output |
| 6 | Q5 | data output |
| 7 | Q6 | data output |
| 8 | GND | ground (0V) |
| 9 | Q7 | data output |
| 10 | Q8 | data output |
| 11 | Q9 | data output |
| 12 | D | data input |
| 13 | C | data input |
| 14 | B | data input |
| 15 | A | data input |
| 16 | V _{CC} | supply voltage |

2.4、Function Table

| Inputs | | | | Outputs | | | | | | | | | |
|--------|---|---|---|---------|----|----|----|----|----|----|----|----|----|
| D | C | B | A | Q0 | Q1 | Q2 | Q3 | Q4 | Q5 | Q6 | Q7 | Q8 | Q9 |
| L | L | L | L | L | H | H | H | H | H | H | H | H | H |
| L | L | L | H | H | L | H | H | H | H | H | H | H | H |
| L | L | H | L | H | H | L | H | H | H | H | H | H | H |
| L | L | H | H | H | H | H | L | H | H | H | H | H | H |
| L | H | L | L | H | H | H | H | L | H | H | H | H | H |
| L | H | L | H | H | H | H | H | H | L | H | H | H | H |
| L | H | H | L | H | H | H | H | H | H | L | H | H | H |
| L | H | H | H | H | H | H | H | H | H | H | L | H | H |
| H | L | L | L | H | H | H | H | H | H | H | H | L | H |
| H | L | L | H | H | H | H | H | H | H | H | H | H | L |
| H | L | H | L | H | H | H | H | H | H | H | H | H | H |
| H | L | H | H | H | H | H | H | H | H | H | H | H | H |
| H | H | L | L | H | H | H | H | H | H | H | H | H | H |
| H | H | L | H | H | H | H | H | H | H | H | H | H | H |
| H | H | H | L | H | H | H | H | H | H | H | H | H | H |
| H | H | H | H | H | H | H | H | H | H | H | H | H | H |

Note: H=HIGH voltage level; L=LOW voltage level.



3、Electrical Parameter

3.1、Absolute Maximum Ratings

(Voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter | Symbol | Conditions | Min. | Max. | Unit |
|-------------------------|-----------|--------------------------------------|-----------|----------|-------------|
| supply voltage | V_{CC} | - | -0.5 | +7 | V |
| supply current | I_{CC} | - | - | 50 | mA |
| ground current | I_{GND} | - | -50 | - | mA |
| input clamping current | I_{IK} | $V_I < -0.5V$ or $V_I > V_{CC}+0.5V$ | - | ± 20 | mA |
| output clamping current | I_{OK} | $V_O < -0.5V$ or $V_O > V_{CC}+0.5V$ | - | ± 20 | mA |
| output current | I_O | $-0.5V < V_O < V_{CC}+0.5V$ | - | ± 25 | mA |
| storage temperature | T_{stg} | - | -65 | +150 | $^{\circ}C$ |
| soldering temperature | T_L | 10s | DIP | 245 | $^{\circ}C$ |
| | | | SOP/TSSOP | 260 | |

3.2、Recommended Operating Conditions

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---------------------|-----------|------------|------|------|----------|-------------|
| supply voltage | V_{CC} | - | 2.0 | 5.0 | 6.0 | V |
| input voltage | V_I | - | 0 | - | V_{CC} | V |
| output voltage | V_O | - | 0 | - | V_{CC} | V |
| ambient temperature | T_{amb} | - | -40 | - | +125 | $^{\circ}C$ |



灵星芯微 精密检测

3.3、Electrical Characteristics

3.3.1、DC Characteristics 1

($T_{amb} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter | Symbol | V _{CC} | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------|-----------------|-----------------|--|------|------|------|------|
| HIGH-level input voltage | V _{IH} | 2.0V | - | 1.5 | 1.2 | - | V |
| | | 4.5V | - | 3.15 | 2.4 | - | V |
| | | 6.0V | - | 4.2 | 3.2 | - | V |
| LOW-level input voltage | V _{IL} | 2.0V | - | - | 0.8 | 0.5 | V |
| | | 4.5V | - | - | 2.1 | 1.35 | V |
| | | 6.0V | - | - | 2.8 | 1.8 | V |
| HIGH-level output voltage | V _{OH} | 2.0V | I _O =-20uA | 1.9 | 2.0 | - | V |
| | | 4.5V | I _O =-20uA | 4.4 | 4.5 | - | V |
| | | 6.0V | I _O =-20uA | 5.9 | 6.0 | - | V |
| | | 4.5V | I _O =-4.0mA | 3.84 | 4.32 | - | V |
| | | 6.0V | I _O =-5.2mA | 5.34 | 5.81 | - | V |
| LOW-level output voltage | V _{OL} | 2.0V | I _O =20uA | - | 0 | 0.1 | V |
| | | 4.5V | I _O =20uA | - | 0 | 0.1 | V |
| | | 6.0V | I _O =20uA | - | 0 | 0.1 | V |
| | | 4.5V | I _O =4.0mA | - | 0.15 | 0.33 | V |
| | | 6.0V | I _O =5.2mA | - | 0.16 | 0.33 | V |
| input leakage current | I _I | 6.0V | V _I =V _{CC} or GND | - | - | ±2 | uA |
| supply current | I _{CC} | 6.0V | V _I =V _{CC} or GND; I _O =0A | - | - | 2 | uA |



3.3.2、DC Characteristics 2

($T_{amb} = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter | Symbol | V _{CC} | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------|-----------------|-----------------|--|------|------|------|------|
| HIGH-level input voltage | V _{IH} | 2.0V | - | 1.5 | - | - | V |
| | | 4.5V | - | 3.15 | - | - | V |
| | | 6.0V | - | 4.2 | - | - | V |
| LOW-level input voltage | V _{IL} | 2.0V | - | - | - | 0.5 | V |
| | | 4.5V | - | - | - | 1.35 | V |
| | | 6.0V | - | - | - | 1.8 | V |
| HIGH-level output voltage | V _{OH} | 2.0V | I _O =-20uA | 1.9 | - | - | V |
| | | 4.5V | I _O =-20uA | 4.4 | - | - | V |
| | | 6.0V | I _O =-20uA | 5.9 | - | - | V |
| | | 4.5V | I _O =-4.0mA | 3.7 | - | - | V |
| | | 6.0V | I _O =-5.2mA | 5.2 | - | - | V |
| LOW-level output voltage | V _{OL} | 2.0V | I _O =20uA | - | - | 0.1 | V |
| | | 4.5V | I _O =20uA | - | - | 0.1 | V |
| | | 6.0V | I _O =20uA | - | - | 0.1 | V |
| | | 4.5V | I _O =4.0mA | - | - | 0.4 | V |
| | | 6.0V | I _O =5.2mA | - | - | 0.4 | V |
| input leakage current | I _I | 6.0V | V _I =V _{CC} or GND | - | - | ±4 | uA |
| supply current | I _{CC} | 6.0V | V _I =V _{CC} or GND; I _O =0A | - | - | 4 | uA |



3.3.3、AC Characteristics 1

($T_{amb} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter | Symbol | V_{CC} | Conditions | | Min. | Typ. | Max. | Unit |
|-------------------|--------------------|----------|---------------------|--------------|------|------|------|------|
| propagation delay | t_{PLH}, t_{PHL} | 5.0V | $C_L = 45\text{pF}$ | see Figure 3 | - | - | 50 | ns |

3.3.4、AC Characteristics 2

($T_{amb} = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter | Symbol | V_{CC} | Conditions | | Min. | Typ. | Max. | Unit |
|-------------------|--------------------|----------|---------------------|--------------|------|------|------|------|
| propagation delay | t_{PLH}, t_{PHL} | 5.0V | $C_L = 45\text{pF}$ | see Figure 3 | - | - | 60 | ns |

4、Testing Circuit

4.1、AC Testing Circuit

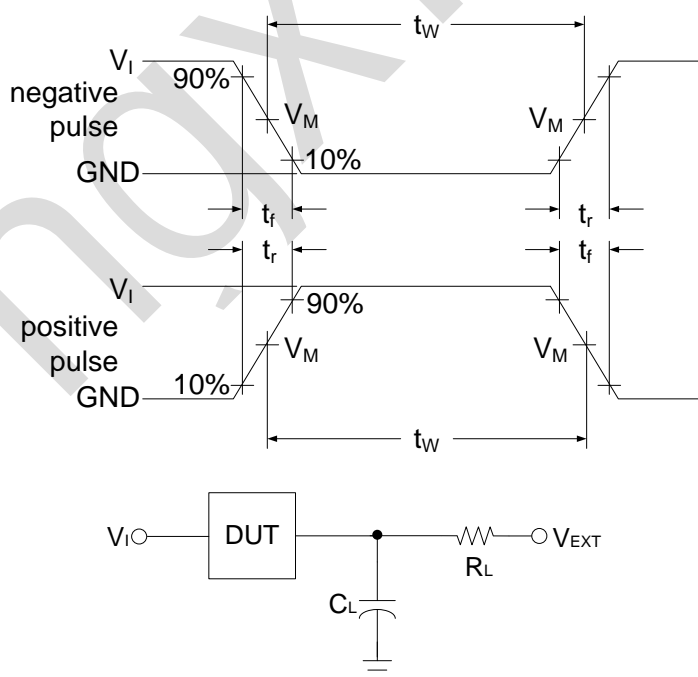


Figure 2. Test circuit for measuring switching times

C_L includes probe and jig capacitance.



4.2、Test Data

| Input | | Load | | V_{EXT} | | |
|----------|-------------|-------|--------------|-------------------|-------------------|-------------------|
| V_I | $t_r = t_f$ | C_L | R_L | t_{PLH}/t_{PHL} | t_{PLZ}/t_{PZL} | t_{PHZ}/t_{PZH} |
| V_{CC} | 3.0ns | 45pF | 665 Ω | Open | V_{CC} | GND |

4.3、AC Testing Waveforms

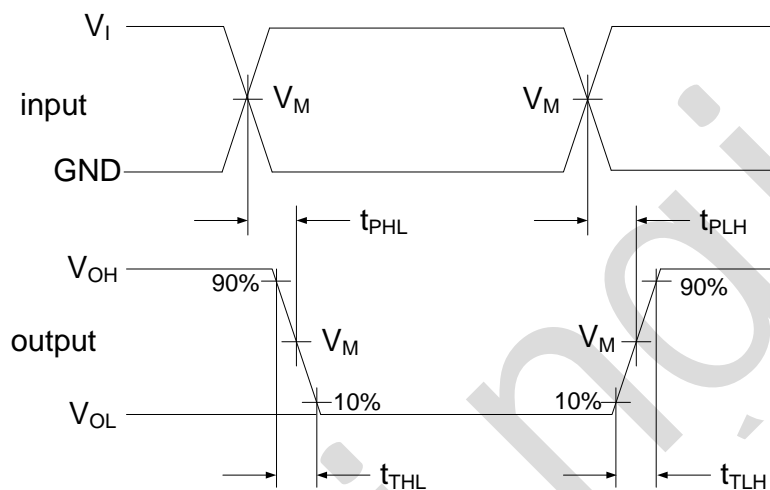


Figure 3. The data input to output propagation delays


4.4、Measurement Points

| Input | Output |
|---------------------|---------------------|
| V_M | V_M |
| $0.5 \times V_{CC}$ | $0.5 \times V_{CC}$ |



5、Package Information


5.1、DIP16

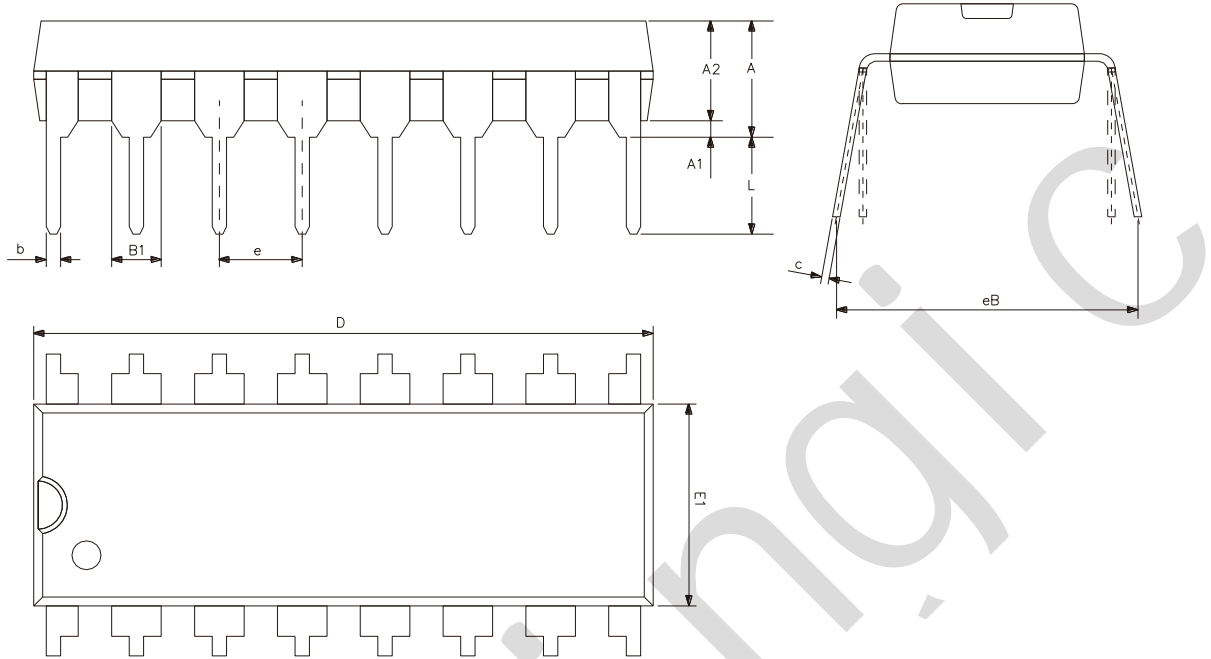

| Symbol | Dimensions (mm) | |
|--------|-----------------|-------|
| | Min. | Max. |
| A2 | 3.20 | 3.60 |
| A1 | 0.51 | - |
| A | 3.60 | 5.33 |
| L | 3.00 | 3.60 |
| b | 0.36 | 0.56 |
| B1 | 1.52 | |
| D | 18.80 | 19.94 |
| E1 | 6.20 | 6.60 |
| e | 2.54 | |
| c | 0.20 | 0.36 |
| eB | 7.62 | 9.30 |



5.2、SOP16

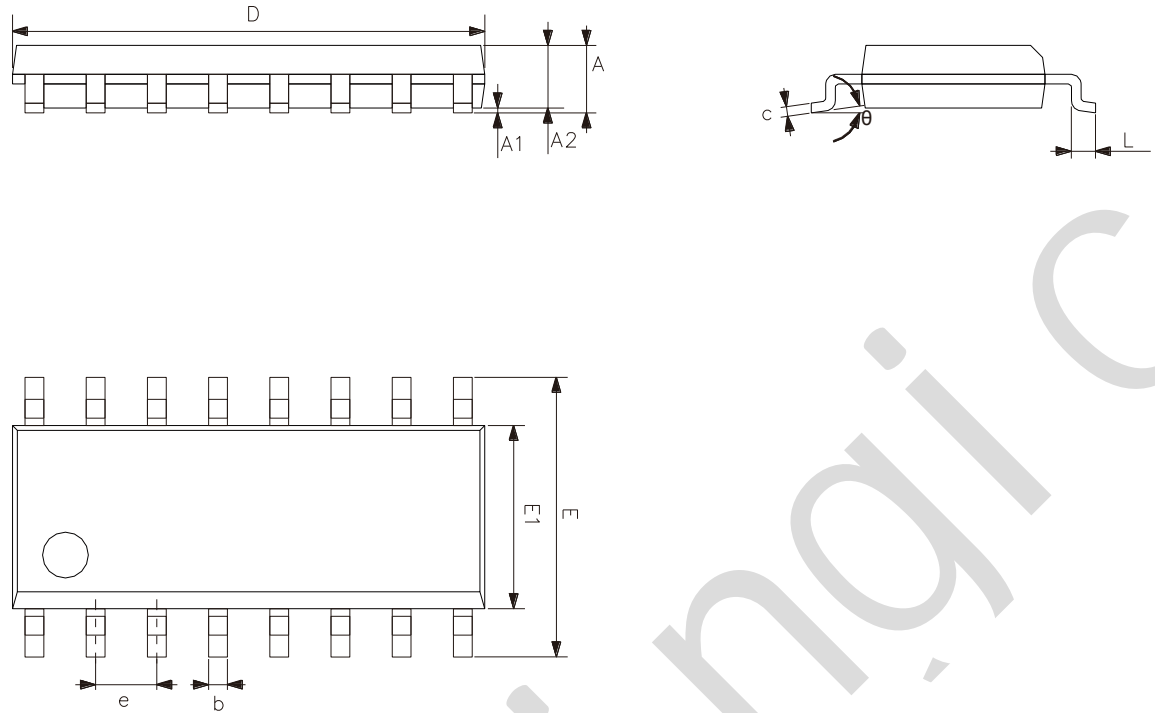

| Symbol | Dimensions (mm) | |
|----------|-----------------|-------|
| | Min. | Max. |
| A | 1.35 | 1.80 |
| A1 | 0.10 | 0.25 |
| A2 | 1.25 | 1.55 |
| b | 0.33 | 0.51 |
| c | 0.19 | 0.25 |
| D | 9.50 | 10.10 |
| E | 5.80 | 6.30 |
| E1 | 3.70 | 4.10 |
| e | 1.27 | |
| L | 0.35 | 0.89 |
| θ | 0° | 8° |



6、 Statements And Notes

6.1、 The name and content of Hazardous substances or Elements in the product

| Part name | Hazardous substances or Elements | | | | | | | | | |
|-------------------------|--|-------------------------------|-------------------------------|-------------------------------|--------------------------|--------------------------------|-------------------|-----------------------|---------------------------|----------------------|
| | Lead and lead compounds | Mercury and mercury compounds | Cadmium and cadmium compounds | Hexavalent chromium compounds | Polybrominated biphenyls | Polybrominated biphenyl ethers | Dibutyl phthalate | Butylbenzyl phthalate | Di-2-ethylhexyl phthalate | Diisobutyl phthalate |
| Lead frame | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Plastic resin | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Chip | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| The lead | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Plastic sheet installed | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| explanation | <p>○: Indicates that the content of hazardous substances or elements in the detection limit of the following the SJ/T11363-2006 standard.</p> <p>×: Indicates that the content of hazardous substances or elements exceeding the SJ/T11363-2006 Standard limit requirements.</p> | | | | | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Encoders, Decoders, Multiplexers & Demultiplexers](#) category:

Click to view products by [lingxingic](#) manufacturer:

Other Similar products are found below :

[MC74HC163ADTG](#) [74HC253N](#) [NLV74VHC1G01DFT1G](#) [NLVHCT4851ADTR2G](#) [NLV14028BDR2G](#) [COMX-CAR-210](#) [SN74LS148N](#)
[PI3B3251LE](#) [PI3B3251QE](#) [NLV74HC4851AMNTWG](#) [MC74LVX257DG](#) [M74HCT4851ADWR2G](#) [NL7SZ19DBVT1G](#) [PI5C3253LEX](#)
[MC74HC251ADTG](#) [MC74ACT138NG](#) [NB3L8533DTR2G](#) [NLV74AC157DR2G](#) [74HC138DT](#) [74HC153DT](#) [74HC238DT](#) [74HC151DT](#)
[ADS131M02IRUKR](#) [CBMG709ATS16](#) [74HC238N](#) [HT74HC154ARWZ](#) [RS2G139XS16-G](#) [74HCT251D](#) [74HC138T](#) [U74HC138G-S16-R](#)
[AIP74HCT138SA.TB](#) [XD74C922](#) [RS1G157XC6](#) [74HC151M/TR](#) [AiP74HC237TA16.TB](#) [AIP74HC138TA16.TB](#) [74HC138DRG](#)
[AiP74LVC138TA16.TB](#) [CD4511BDRG](#) [AiP74LVC157TA16.TB](#) [SN74HC42N\(LX\)](#) [SN74LS157N\(LX\)](#) [SN74LS42N](#) [TC4053BFT\(EL,N\)](#)
[74VHC4052AFT\(BE\)](#) [TC74VHC138FK\(EL,K\)](#) [TC74HC151AF\(EL,F\)](#) [SN74HC145DR\(LX\)](#) [SN74HC139DR\(LX\)](#) [CD4028BM\(LX\)](#)