



# SN74LS145

## BCD-to-Decimal Decoders/Drivers

### Product Specification

**Specification Revision History:**

Version	Date	Description
2023-06-A1	2023-06	New



灵星芯微 芯片经营

# Contents

<b>1、 General Description.....</b>	<b>3</b>
<b>2、 Block Diagram And Pin Description .....</b>	<b>5</b>
2.1、 Block Diagram .....	5
2.2、 Pin Configurations.....	5
2.3、 Pin Description .....	6
2.4、 Function Table.....	6
<b>3、 Electrical Parameter .....</b>	<b>7</b>
3.1、 Absolute Maximum Ratings.....	7
3.2、 Recommended Operating Conditions .....	7
3.3、 Electrical Characteristics .....	8
3.3.1、 DC Characteristics 1 .....	8
3.3.2、 DC Characteristics 2 .....	9
3.3.3、 AC Characteristics 1 .....	10
3.3.4、 AC Characteristics 2 .....	10
<b>4、 Testing Circuit .....</b>	<b>10</b>
4.1、 AC Testing Circuit .....	10
4.2、 Test Data .....	11
4.3、 AC Testing Waveforms.....	11
4.4、 Measurement Points .....	11
<b>5、 Package Information .....</b>	<b>12</b>
5.1、 DIP16 .....	12
5.2、 SOP16 .....	13
5.3、 TSSOP16.....	14
<b>6、 Statements And Notes .....</b>	<b>15</b>
6.1、 The name and content of Hazardous substances or Elements in the product .....	15



灵星芯微 肖芯经营

## 1、General Description

The SN74LS145 is a BCD-to-decimal decoders/drivers.

### Features:

- Supply voltage range: 2V to 6V
- Temperature range: -40°C to +125°C
- Packaging information: DIP16/SOP16

### Ordering Information:

#### Tube packing specifications:

Part number	Packaging form	Marking code	Tube quantity	Boxed tube quantity	Boxed quantity	Notes
SN74LS145N	DIP16	SN74LS145N	25 PCS/tube	40 tube/box	1000 PCS/box	Dimensions of plastic enclosure: 19.0mm×6.4mm Pin spacing: 2.54mm
SN74LS145DR	SOP16	LS145	50 PCS/tube	200 tube/box	10000 PCS/box	Dimensions of plastic enclosure: 10.0mm×3.9mm Pin spacing: 1.27mm

#### Reel packing specifications:

Part number	Packaging form	Marking code	Reel quantity	Boxed reel quantity	Notes
SN74LS145DR	SOP16	LS145	2500 PCS/reel	5000 PCS/box	Dimensions of plastic enclosure: 10.0mm×3.9mm Pin spacing: 1.27mm

Note: If the physical information is inconsistent with the ordering information, please refer to the actual product.





### 2.3、Pin Description

Pin No.	Pin Name	Description
1	Q0	data output
2	Q1	data output
3	Q2	data output
4	Q3	data output
5	Q4	data output
6	Q5	data output
7	Q6	data output
8	GND	ground (0V)
9	Q7	data output
10	Q8	data output
11	Q9	data output
12	D	data input
13	C	data input
14	B	data input
15	A	data input
16	V <sub>CC</sub>	supply voltage

### 2.4、Function Table

Inputs				Outputs									
D	C	B	A	Q0	Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9
L	L	L	L	L	H	H	H	H	H	H	H	H	H
L	L	L	H	H	L	H	H	H	H	H	H	H	H
L	L	H	L	H	H	L	H	H	H	H	H	H	H
L	L	H	H	H	H	H	L	H	H	H	H	H	H
L	H	L	L	H	H	H	H	L	H	H	H	H	H
L	H	L	H	H	H	H	H	H	L	H	H	H	H
L	H	H	L	H	H	H	H	H	H	L	H	H	H
L	H	H	H	H	H	H	H	H	H	H	L	H	H
H	L	L	L	H	H	H	H	H	H	H	H	L	H
H	L	L	H	H	H	H	H	H	H	H	H	H	L
H	L	H	L	H	H	H	H	H	H	H	H	H	H
H	L	H	H	H	H	H	H	H	H	H	H	H	H
H	H	L	L	H	H	H	H	H	H	H	H	H	H
H	H	L	H	H	H	H	H	H	H	H	H	H	H
H	H	H	L	H	H	H	H	H	H	H	H	H	H
H	H	H	H	H	H	H	H	H	H	H	H	H	H

Note: H=HIGH voltage level; L=LOW voltage level.



### 3、Electrical Parameter

#### 3.1、Absolute Maximum Ratings

(Voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Max.	Unit
supply voltage	$V_{CC}$	-	-0.5	+7	V
supply current	$I_{CC}$	-	-	50	mA
ground current	$I_{GND}$	-	-50	-	mA
input clamping current	$I_{IK}$	$V_I < -0.5V$ or $V_I > V_{CC}+0.5V$	-	$\pm 20$	mA
output clamping current	$I_{OK}$	$V_O < -0.5V$ or $V_O > V_{CC}+0.5V$	-	$\pm 20$	mA
output current	$I_O$	$-0.5V < V_O < V_{CC}+0.5V$	-	$\pm 25$	mA
storage temperature	$T_{stg}$	-	-65	+150	$^{\circ}C$
soldering temperature	$T_L$	10s	DIP	245	$^{\circ}C$
			SOP/TSSOP	260	

#### 3.2、Recommended Operating Conditions

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
supply voltage	$V_{CC}$	-	2.0	5.0	6.0	V
input voltage	$V_I$	-	0	-	$V_{CC}$	V
output voltage	$V_O$	-	0	-	$V_{CC}$	V
ambient temperature	$T_{amb}$	-	-40	-	+125	$^{\circ}C$



### 3.3、Electrical Characteristics

#### 3.3.1、DC Characteristics 1

( $T_{amb} = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	V <sub>CC</sub>	Conditions	Min.	Typ.	Max.	Unit
HIGH-level input voltage	V <sub>IH</sub>	2.0V	-	1.5	1.2	-	V
		4.5V	-	3.15	2.4	-	V
		6.0V	-	4.2	3.2	-	V
LOW-level input voltage	V <sub>IL</sub>	2.0V	-	-	0.8	0.5	V
		4.5V	-	-	2.1	1.35	V
		6.0V	-	-	2.8	1.8	V
HIGH-level output voltage	V <sub>OH</sub>	2.0V	I <sub>O</sub> =-20uA	1.9	2.0	-	V
		4.5V	I <sub>O</sub> =-20uA	4.4	4.5	-	V
		6.0V	I <sub>O</sub> =-20uA	5.9	6.0	-	V
		4.5V	I <sub>O</sub> =-4.0mA	3.84	4.32	-	V
		6.0V	I <sub>O</sub> =-5.2mA	5.34	5.81	-	V
LOW-level output voltage	V <sub>OL</sub>	2.0V	I <sub>O</sub> =20uA	-	0	0.1	V
		4.5V	I <sub>O</sub> =20uA	-	0	0.1	V
		6.0V	I <sub>O</sub> =20uA	-	0	0.1	V
		4.5V	I <sub>O</sub> =4.0mA	-	0.15	0.33	V
		6.0V	I <sub>O</sub> =5.2mA	-	0.16	0.33	V
input leakage current	I <sub>I</sub>	6.0V	V <sub>I</sub> =V <sub>CC</sub> or GND	-	-	±2	uA
supply current	I <sub>CC</sub>	6.0V	V <sub>I</sub> =V <sub>CC</sub> or GND; I <sub>O</sub> =0A	-	-	2	uA



### 3.3.2、DC Characteristics 2

( $T_{amb} = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	V <sub>CC</sub>	Conditions	Min.	Typ.	Max.	Unit
HIGH-level input voltage	V <sub>IH</sub>	2.0V	-	1.5	-	-	V
		4.5V	-	3.15	-	-	V
		6.0V	-	4.2	-	-	V
LOW-level input voltage	V <sub>IL</sub>	2.0V	-	-	-	0.5	V
		4.5V	-	-	-	1.35	V
		6.0V	-	-	-	1.8	V
HIGH-level output voltage	V <sub>OH</sub>	2.0V	I <sub>O</sub> =-20uA	1.9	-	-	V
		4.5V	I <sub>O</sub> =-20uA	4.4	-	-	V
		6.0V	I <sub>O</sub> =-20uA	5.9	-	-	V
		4.5V	I <sub>O</sub> =-4.0mA	3.7	-	-	V
		6.0V	I <sub>O</sub> =-5.2mA	5.2	-	-	V
LOW-level output voltage	V <sub>OL</sub>	2.0V	I <sub>O</sub> =20uA	-	-	0.1	V
		4.5V	I <sub>O</sub> =20uA	-	-	0.1	V
		6.0V	I <sub>O</sub> =20uA	-	-	0.1	V
		4.5V	I <sub>O</sub> =4.0mA	-	-	0.4	V
		6.0V	I <sub>O</sub> =5.2mA	-	-	0.4	V
input leakage current	I <sub>I</sub>	6.0V	V <sub>I</sub> =V <sub>CC</sub> or GND	-	-	±4	uA
supply current	I <sub>CC</sub>	6.0V	V <sub>I</sub> =V <sub>CC</sub> or GND; I <sub>O</sub> =0A	-	-	4	uA





### 3.3.3、AC Characteristics 1

( $T_{amb} = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	$V_{CC}$	Conditions		Min.	Typ.	Max.	Unit
propagation delay	$t_{PLH}, t_{PHL}$	5.0V	$C_L = 45\text{pF}$	see Figure 3	-	-	50	ns

### 3.3.4、AC Characteristics 2

( $T_{amb} = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	$V_{CC}$	Conditions		Min.	Typ.	Max.	Unit
propagation delay	$t_{PLH}, t_{PHL}$	5.0V	$C_L = 45\text{pF}$	see Figure 3	-	-	60	ns

## 4、Testing Circuit

### 4.1、AC Testing Circuit

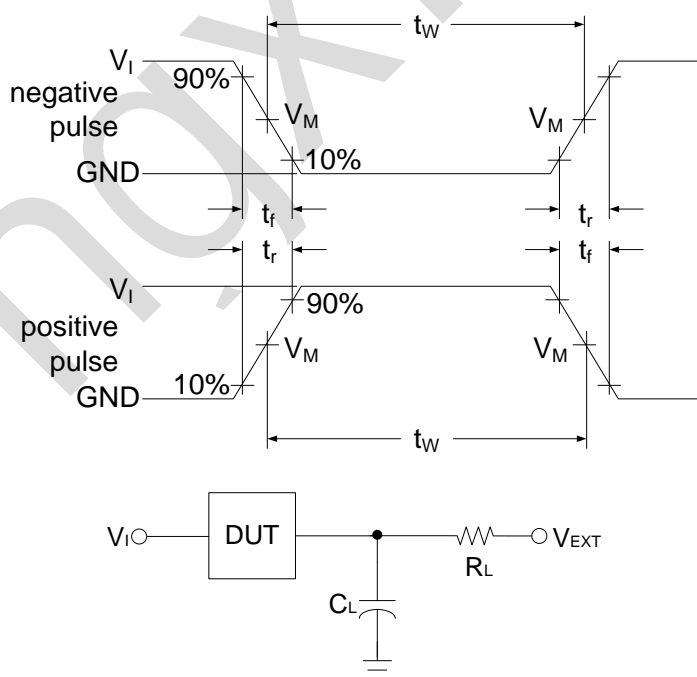


Figure 2. Test circuit for measuring switching times

$C_L$  includes probe and jig capacitance.



#### 4.2、Test Data

Input		Load		$V_{EXT}$		
$V_I$	$t_r = t_f$	$C_L$	$R_L$	$t_{PLH}/t_{PHL}$	$t_{PLZ}/t_{PZL}$	$t_{PHZ}/t_{PZH}$
$V_{CC}$	3.0ns	45pF	665 $\Omega$	Open	$V_{CC}$	GND

#### 4.3、AC Testing Waveforms

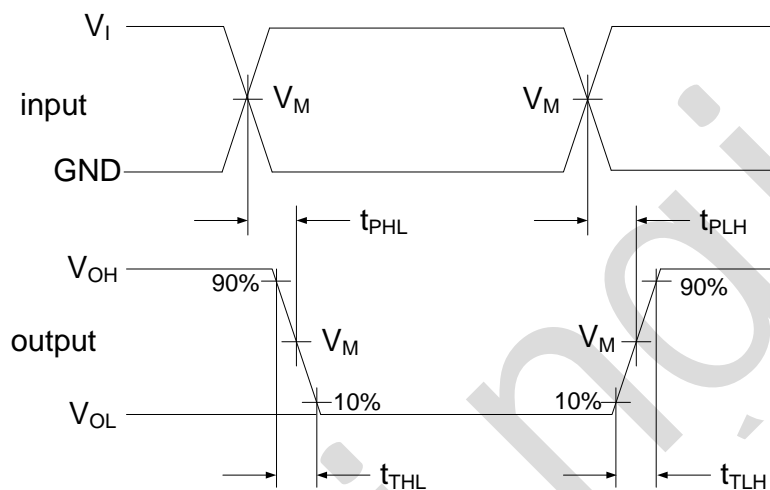


Figure 3. The data input to output propagation delays


#### 4.4、Measurement Points

Input	Output
$V_M$	$V_M$
$0.5 \times V_{CC}$	$0.5 \times V_{CC}$



## 5、Package Information


### 5.1、DIP16

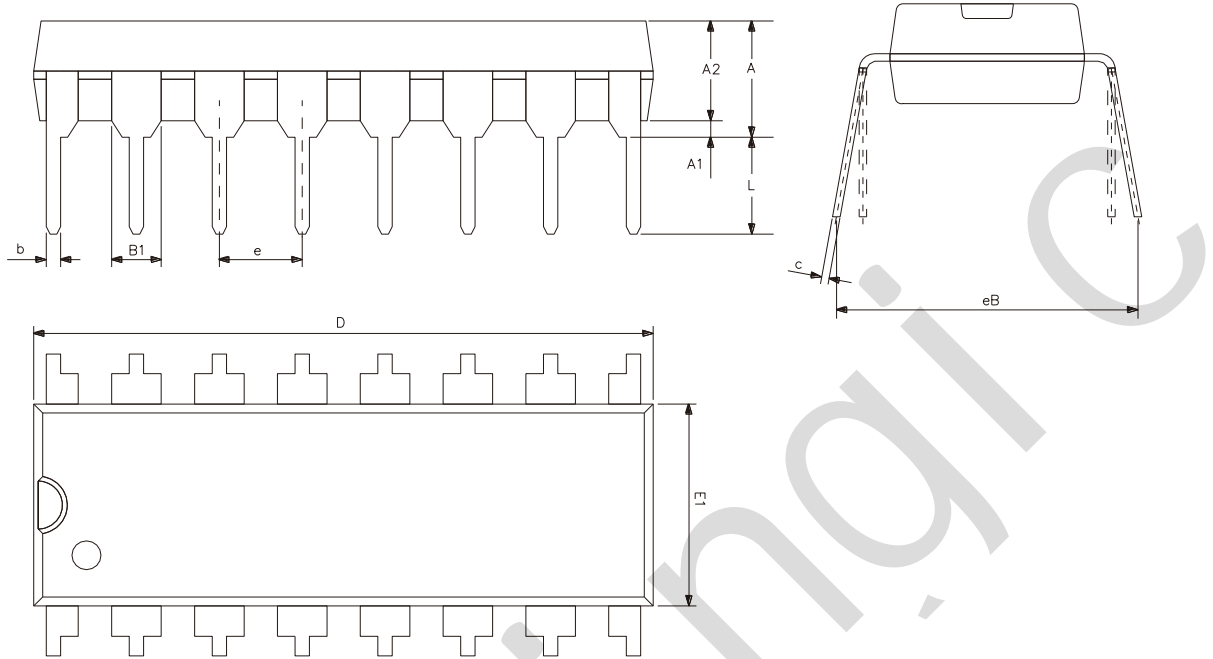

Symbol	Dimensions (mm)	
	Min.	Max.
A2	3.20	3.60
A1	0.51	-
A	3.60	5.33
L	3.00	3.60
b	0.36	0.56
B1	1.52	
D	18.80	19.94
E1	6.20	6.60
e	2.54	
c	0.20	0.36
eB	7.62	9.30



### 5.2、SOP16

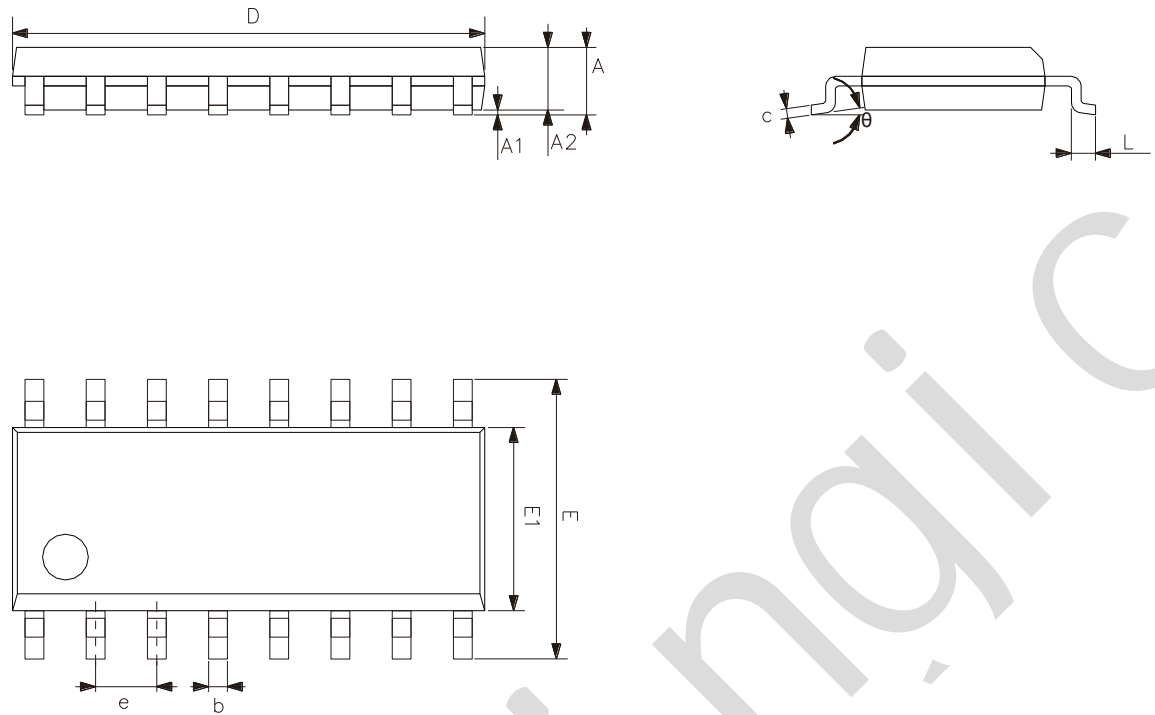

Symbol	Dimensions (mm)	
	Min.	Max.
A	1.35	1.80
A1	0.10	0.25
A2	1.25	1.55
b	0.33	0.51
c	0.19	0.25
D	9.50	10.10
E	5.80	6.30
E1	3.70	4.10
e	1.27	
L	0.35	0.89
$\theta$	0°	8°



灵星芯微 集成电路

## 6、 Statements And Notes

### 6.1、 The name and content of Hazardous substances or Elements in the product

Part name	Hazardous substances or Elements									
	Lead and lead compounds	Mercury and mercury compounds	Cadmium and cadmium compounds	Hexavalent chromium compounds	Polybrominated biphenyls	Polybrominated biphenyl ethers	Dibutyl phthalate	Butylbenzyl phthalate	Di-2-ethylhexyl phthalate	Diisobutyl phthalate
Lead frame	○	○	○	○	○	○	○	○	○	○
Plastic resin	○	○	○	○	○	○	○	○	○	○
Chip	○	○	○	○	○	○	○	○	○	○
The lead	○	○	○	○	○	○	○	○	○	○
Plastic sheet installed	○	○	○	○	○	○	○	○	○	○
explanation	<p>○: Indicates that the content of hazardous substances or elements in the detection limit of the following the SJ/T11363-2006 standard.</p> <p>×: Indicates that the content of hazardous substances or elements exceeding the SJ/T11363-2006 Standard limit requirements.</p>									

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Encoders, Decoders, Multiplexers & Demultiplexers](#) category:*

*Click to view products by [lingxingic](#) manufacturer:*

Other Similar products are found below :

[MC74HC163ADTG](#) [74HC253N](#) [NLV74VHC1G01DFT1G](#) [NLVHCT4851ADTR2G](#) [NLV14028BDR2G](#) [COMX-CAR-210](#) [SN74LS148N](#)  
[PI3B3251LE](#) [PI3B3251QE](#) [NLV74HC4851AMNTWG](#) [MC74LVX257DG](#) [M74HCT4851ADWR2G](#) [NL7SZ19DBVT1G](#) [PI5C3253LEX](#)  
[MC74HC251ADTG](#) [MC74ACT138NG](#) [NB3L8533DTR2G](#) [NLV74AC157DR2G](#) [74HC138DT](#) [74HC153DT](#) [74HC238DT](#) [74HC151DT](#)  
[ADS131M02IRUKR](#) [CBMG709ATS16](#) [74HC238N](#) [HT74HC154ARWZ](#) [RS2G139XS16-G](#) [74HCT251D](#) [74HC138T](#) [U74HC138G-S16-R](#)  
[AIP74HCT138SA.TB](#) [XD74C922](#) [RS1G157XC6](#) [74HC151M/TR](#) [AiP74HC237TA16.TB](#) [AIP74HC138TA16.TB](#) [74HC138DRG](#)  
[AiP74LVC138TA16.TB](#) [CD4511BDRG](#) [AiP74LVC157TA16.TB](#) [SN74HC42N\(LX\)](#) [SN74LS157N\(LX\)](#) [SN74LS42N](#) [TC4053BFT\(EL,N\)](#)  
[74VHC4052AFT\(BE\)](#) [TC74VHC138FK\(EL,K\)](#) [TC74HC151AF\(EL,F\)](#) [SN74HC145DR\(LX\)](#) [SN74HC139DR\(LX\)](#) [CD4028BM\(LX\)](#)