

ADP-SMAM-SMBF-G SMA Plug to SMB Jack Adapter

The ADP-SMAM-SMBF-G is an SMA plug to SMB jack adapter. Operating from 0 GHz to 4 GHz, the ADP-SMAM-SMBF-G combines superior performance, compact size, and a convenient snap-on mating interface to provide a reliable, easy-to-use adapter. Additionally, all Linx adapters meet RoHS lead free standards and are tested to meet requirements for corrosion resistance, vibration, mechanical and thermal shock.



Features

- 0 to 4 GHz operation
- Gold plating
 - Superior corrosion resistance
- SMA plug (male pin) connection
 - Gold plated brass center contact
- SMB jack (male pin) connection
 - Gold plated brass center contact

Applications

- LPWA
 - LoRaWAN®, Sigfox®, WiFi HaLow™ (802.11ah)
- Cellular IoT
 - LTE-M (Cat-M1), NB-IoT
- Cellular
 - 5G/4G LTE/3G/2G
- GNSS
 - GPS, Galileo, GLONASS, BeiDou, QZSS
- Industrial/Commercial/Enterprise
- ISM

Table 1. Electrical Specifications

Impedance	50 Ω	
Frequency Range	0 to 4 GHz	
Voltage Rating	750 V RMS	
Contact Resistance	Center: ≤ 6.0 mΩ Outer: ≤ 2.0 mΩ	
Select Frequencies	400 MHz to 960 MHz	2.4 GHz
Insertion Loss (dB max)	-0.08	-0.14
VSWR (max)	1.0	1.0

Ordering Information

Part Number	Description
ADP-SMAM-SMBF-G	SMA plug (male pin) to SMB jack (male pin) adapter

Available from Linx Technologies and select distributors and representatives.

Product Dimensions

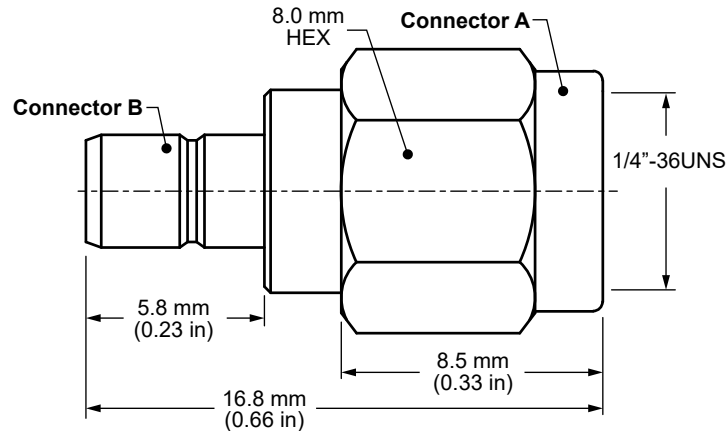


Figure 1. Product Dimensions for the ADP-SMAM-SMBF-G Adapter

Table 2. Adapter Components

ADP-SMAM-SMBF-G	Connector A SMA plug (male pin)		Connector B SMB jack (male pin)	
Connector Part	Material	Finish	Material	Finish
Body	Brass	Gold	Brass	Gold
Center Contact	Brass	Gold	Brass	Gold
Insulator	PTFE	-	PTFE	-

Adapter Performance

Table 3 shows insertion loss and VSWR values for the ADP-SMAM-SMBF-G adapter at commonly used frequencies.

Insertion loss is the loss of signal power (gain) resulting from the insertion of a device in a transmission line. VSWR describes how efficiently power is transmitted through the adapter. A lower VSWR value indicates better performance at a given frequency.

Table 3. Insertion Loss and VSWR for the ADP-SMAM-SMBF-G Adapter

Band	Low-Band Cellular/ ISM/LPWA	GNSS	Midband Cellular	WiFi/ISM
Frequency Range	400 MHz to 960 MHz	1164 MHz to 1609 MHz	1427 MHz to 5000 MHz	2.4 GHz
Insertion Loss (dB max)	-0.08	-0.12	-0.21	-0.14
VSWR (max)	1.0	1.0	1.2	1.0

Table 4. Mechanical Specifications

ADP-SMAM-SMBF-G	Connector A SMA plug (male pin)	Connector B SMB jack (male pin)
Mounting Type	Inline, Free-hanging	
Fastening Type	1/4"-36UNS Threaded Coupling	Snap-on Coupling
Interface in Accordance with	MIL-STD-348A	MIL-STD-348A
Recommended Torque	0.57 N·m (5.0 in·lbs)	n/a
Coupling Nut Retention	60 lbs min.	n/a
Durability	500 cycles min.	500 cycles min.
Weight	4.7 g (0.16 oz)	

Table 5. Environmental Specifications

MIL-STD, Method, Test Condition	
Corrosion (Salt spray)	MIL-STD-202 Method 101 test condition B
Thermal Shock	MIL-STD-202 Method 107 test condition B
Vibration	MIL-STD-202 Method 204 test condition B
Mechanical Shock	MIL-STD-202 Method 213 test condition I
Temperature Range	-65 °C to +165 °C
Environmental Compliance	RoHS

Packaging Information

The ADP-SMAM-SMBF-G adapter is sealed in a plastic bag of 50 pcs. Bags are placed in cartons (4000 pcs.) Distribution channels may offer alternative packaging options.

Website: <http://linxtechnologies.com>
Linx Offices: 159 Ort Lane, Merlin, OR, US 97532
Phone: +1 (541) 471-6256
E-MAIL: info@linxtechnologies.com

Linx Technologies reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Wireless Made Simple is a registered trademark of Linx Acquisitions LLC. LoRaWAN is a registered trademark of Semtech Corporation. Sigfox is a registered trademark of SIGFOX. Other product and brand names may be trademarks or registered trademarks of their respective owners.

Copyright © 2020 Linx Technologies

All Rights Reserved

Doc# DS20339-127CON



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Adapters - Between Series](#) *category:*

Click to view products by [Linx Technologies](#) *manufacturer:*

Other Similar products are found below :

[5945-9503-000](#) [MCX/F-SMA/M](#) [R192417010](#) [ADBJ20-E1-BJ379](#) [ADM2](#) [ADPL75-A1-PL75](#) [242191](#) [9317505](#) [29-3835P](#) [AD130](#) [ADBJ20-E1-PL74](#) [ADBJ77-A1PL3155](#) [ADBJ77-E1-UPL20](#) [ADRMF370](#) [242190](#) [242215](#) [242228](#) [R125680000W](#) [R192430000](#) [UAD95](#) [1057367-1](#) [8311505](#) [R114704000](#) [R451034500](#) [R451030500](#) [R451543000](#) [HDVDPN](#) [ADBJ20-K1-PL20](#) [R451570000](#) [R192419000](#) [R451034000](#) [J9](#) [J3WE-5](#) [R451032500](#) [242201RP](#) [17K132-K00S5](#) [03K719-S22S3](#) [AD-RSMAF-RTNC](#) [53K156-K00N5](#) [53K160-KIMN1](#) [02K119-K00E3](#) [29S132-K01N5](#) [53S156-K00N5](#) [02S119-S00E3](#) [28K132-K00N5](#) [02S109-K00S3](#) [27-8200TP](#) [242235](#) [ADBJ20-E1-BJ89](#) [ADP-SMAF-MMCXM](#)