

Product Brief



LCD Series Dual-Band WiFi Antenna

The Linx LCD series dipole antenna provides a compact, affordable, easy-to-use antenna solution for single- and dual-band WiFi/WLAN as well as other 2.4 GHz or 5 GHz ISM and U-NII frequency band applications.

The hinged, rotating, design of the LCD antenna allows positioning for optimum performance and reduces the potential for damage from impact compared to a fixed whip design.

The LCD antenna is available with an SMA plug (male pin), or RP-SMA plug (female socket) connector for FCC Part 15 compliant applications.



Features

- Performance at 2.4 GHz to 2.485 GHz
 - VSWR: ≤ 1.5
 - Peak Gain: 2.8 dBi
 - Efficiency: 86%
- Performance at 5.15 GHz to 5.85 GHz
 - VSWR: ≤ 1.5
 - Peak Gain: 4.5 dBi
 - Efficiency: 63%
- Hinged design with detents for straight, 45 degree and 90 degree positioning
- SMA plug (male pin) or RP-SMA plug (female socket)

Applications

- Single- and dual-band WiFi/WLAN
 - 802.11b/g
 - WiFi 4 (802.11n)
 - WiFi 5 (802.11ac)
- 2.4 GHz ISM Applications
 - Bluetooth®
 - ZigBee®
- Internet of Things (IoT) devices
- Smart Home networking
- Sensing and remote monitoring
- U-NII and ISM applications

Ordering Information

Part Number	Description
ANT-DB1-LCD-SMA	Antenna with SMA plug (male pin)
ANT-DB1-LCD-RPS	Antenna with RP-SMA plug (female socket)

Available from Linx Technologies and select distributors and representatives.

Electrical Specifications

ANT-DB1-LCD-ccc	WiFi / ISM	WiFi / U-NII	
Frequency Range	2.400 GHz to 2.485 GHz	5.150 GHz to 5.850 GHz	
VSWR (max.)	1.5	1.5	
Peak Gain (dBi)	2.8	4.5	
Average Gain (dBi)	-0.8	-2.5	
Efficiency (%)	86	63	
Polarization	Linear	Impedance	50 Ω
Radiation	Omnidirectional	Max Power	10 W
Wavelength	1/2-wave	Electrical Type	Dipole
Weight	7.4 g (0.26 oz)	Operating Temp. Range	-40 °C to +80 °C
Dimensions	Height: 83.1 mm (3.27 in) Diameter: 9.4 mm (0.37 in)		
Connection	SMA plug (male pin) or RP-SMA plug (female socket)		

Electrical specifications and plots measured with antenna, mounted on the edge, bent 90 degrees.

VSWR

Figure 1 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

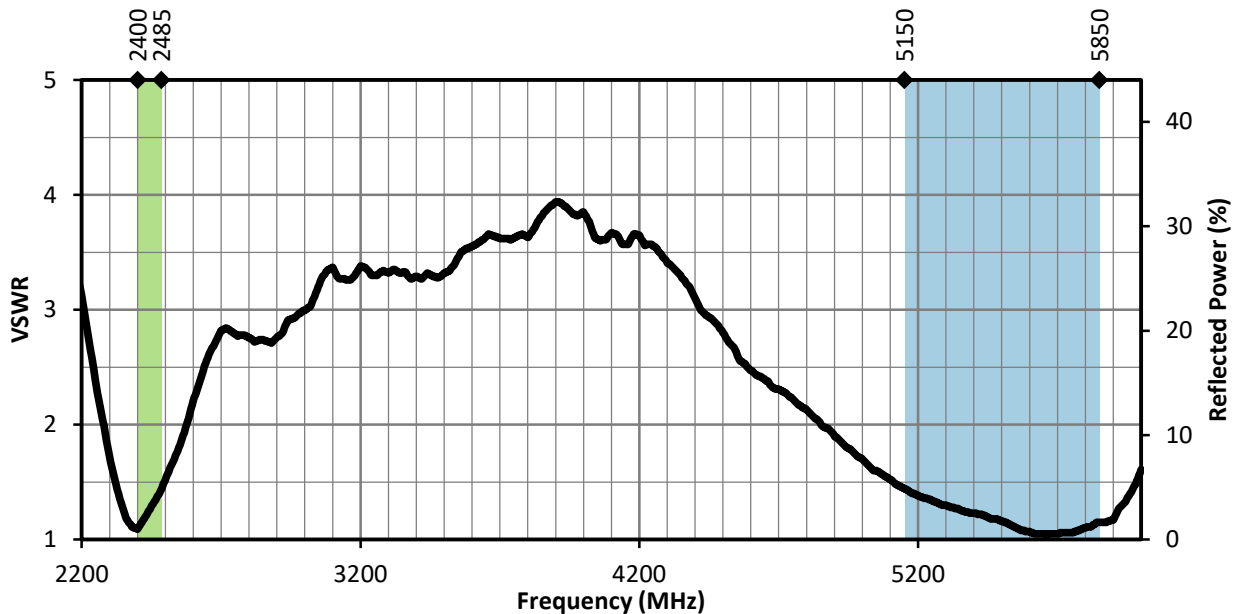


Figure 1. LCD Series VSWR, with Frequency Band Highlights

Website: <http://linxtechnologies.com> • Phone: +1 (541) 471-6256 • E-MAIL: info@linxtechnologies.com • Linx Offices: 159 Ort Lane, Merlin, OR, US 97532

Linx Technologies reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Wireless Made Simple is a registered trademark of Linx Acquisitions LLC. Bluetooth is a registered trademark of Bluetooth SIG, Inc. ZigBee is a registered trademark of ZigBee Alliance, Inc. Other product and brand names may be trademarks or registered trademarks of their respective owners.

Copyright © 2020 Linx Technologies. All Rights Reserved.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Linx Technologies](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3525BW100](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [EXB144SM](#) [C37](#) [MAF94051](#) [GD35-17P-NF](#) [P1744](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#)