



# IR Emitter and Detector Product Data Sheet

## HSDL-4260

Spec No.: DS50-2008-0025

Effective Date: 06/18/2013

Revision: B

**LITE-ON DCC**

**RELEASE**

BNS-OD-FC001/A4

## FEATURES

- \* High power AlGaAs LED technology
- \* T-1 3/4 Package

- \* Applications
- Industrial Infrared Equipments and


application

- \* 875 nm Wavelength
- \* High speed: 40ns Rise times
- \* Low Forward Voltage

- Portable Infrared Instruments
- Consumer Electronics
- (Optical mouse, Infrared Remote Controllers ect)
- High Speed Infrared Communications
- (IR LANs , IR Moldens , IR Dongles , etc)



## PACKAGE DIMENSIONS

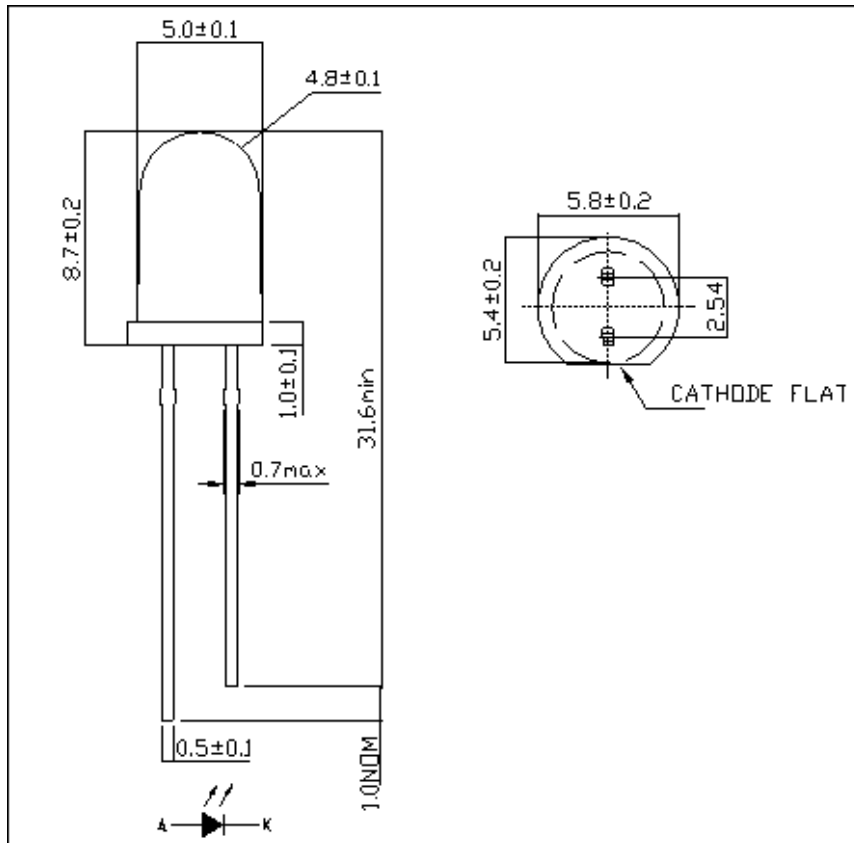

### NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25\text{mm}$  (.010") unless otherwise noted.
3. Protruded resin under flange is 1.5mm (.059") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.



**LITE-ON TECHNOLOGY CORPORATION.**

Property of Lite-On Only

BNS-OD-C131/A4



# LITE-ON TECHNOLOGY CORPORATION.

Property of Lite-On Only

## ABSOLUTE MAXIMUM RATINGS AT TA=25°C

PARAMETER	Symbol	MIN	MAX	UNIT	Reference
Forward Current	I <sub>FDC</sub>		100	mA	[1]
Peak Forward Current	I <sub>FPK</sub>		500	mA	Fig 3 Duty Factor=20% Pulse Width=100us
Power Dissipation	P <sub>DISS</sub>		230	mW	
Reverse Voltage	V <sub>R</sub>	4		V	IR=100uA
Storage Temperature	T <sub>S</sub>	-40	100	°C	
LED Junction Temperature	T <sub>J</sub>		110	°C	
Lead Soldering Temperature [1.6mm(.063") From Body]			260 for 5 seconds	°C	

Notes:

1. Derate as shown in Figure 6.

## Recommended Operating Conditions

PARAMETER	Symbol	MIN	MAX	UNIT	Reference
Operating Temperature	T <sub>O</sub>	-40	85	°C	



# LITE-ON TECHNOLOGY CORPORATION.

Property of Lite-On Only

## ELECTRICAL CHARACTERISTICS AT 25°C

PARAMETER	Symbol	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	Reference
Forward Voltage	$V_F$		1.4	1.9	V	$I_{FDC} = 20\text{mA}$	Fig.2
			1.7	2.3	V	$I_{FDC} = 100\text{mA}$	
Forward Voltage Temperature Coefficient	$\Delta V/\Delta T$		-1.3		mV/°C	$I_{FDC} = 100\text{mA}$	Fig.4
Series Resistance	$R_S$		4		Ohms	$I_{FDC} = 100\text{mA}$	
Diode Capacitance	$C_O$		70		pF	0 V, 1 MHz	
Reverse Voltage	$V_R$	2	20		V	$I_R = 100 \mu\text{A}$	
Thermal Resistance, Junction to Pin	$R_{\theta JA}$		300		°C/W		

### OPTICAL CHARACTERISTICS AT TA=25°C

PARAMETER	Symbol	MIN.	TYP.	MAX.	UNIT	Test condition	Reference
Radiant On-Axis Intensity	$I_E$	150	200		Mw/Sr	$I_{FDC} = 100mA$	Fig.5
Radiant On-Axis Intensity Temperature Coefficient	$\Delta I_E / \Delta T$	-	-0.36	-	%/°C	$I_{FDC} = 100mA$	
Viewing Angle	$2\theta_{1/2}$	-	15	-	deg	$I_{FDC} = 20mA$	Fig.7
Peak Wavelength	$\lambda_{pk}$	-	875	-	nm		Fig.1
Peak Wavelength Temperature Coefficient	$\Delta \lambda / \Delta T$	-	0.2	-	nm/°C	$I_{FDC} = 100mA$	
Spectral Width-at FWHM	$\Delta \lambda$		45	-	nm	$I_{FDC} = 20mA$	Fig.1
Optical Rise and all Times, 10%-90%	$T_r / T_f$		15	-	ns	$I_{FDC} = 500 mA$ Duty Ratio=20% Pulse Width=100ns	

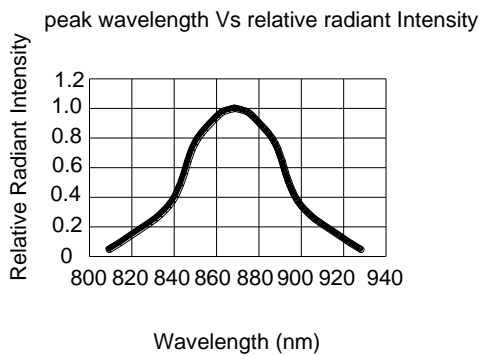


FIG.1 Relative Radiant Intensity VS Wavelength

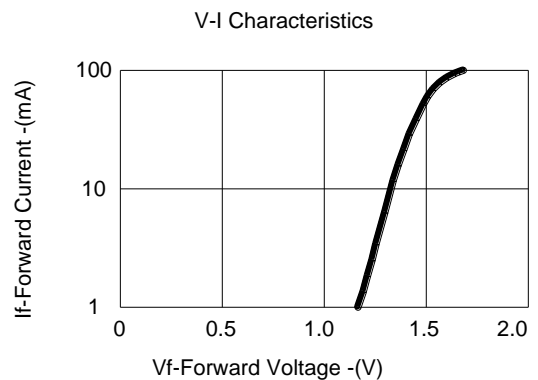


FIG.2 DC Forward Current VS. Forward Voltage

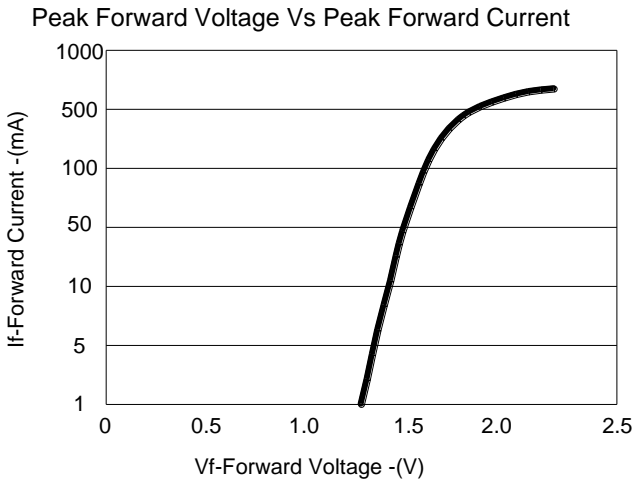


FIG.3 Peak Forward Current VS. Forward Voltage

Forward Current Vs Relative Radiant Intensity

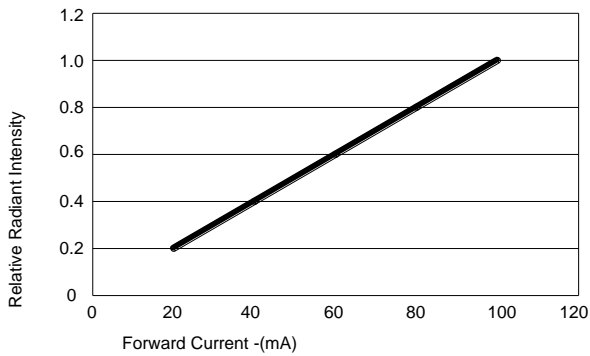


FIG.5 Relative Radiant Intensity vs DC Forward Current

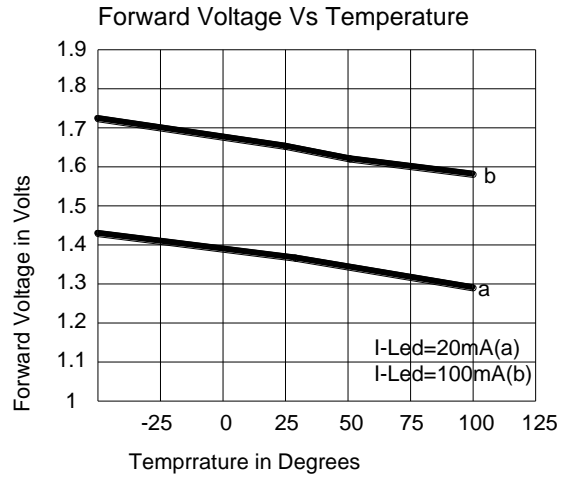


FIG.4 Forward Voltage VS. Ambient Temperature

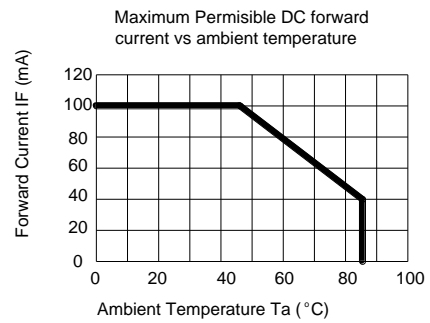


FIG.6 DC FORWARD CURRENT VS. AMBIENT TEMPERATURE DERATED (Based on T<sub>JMAX</sub>=110°C)

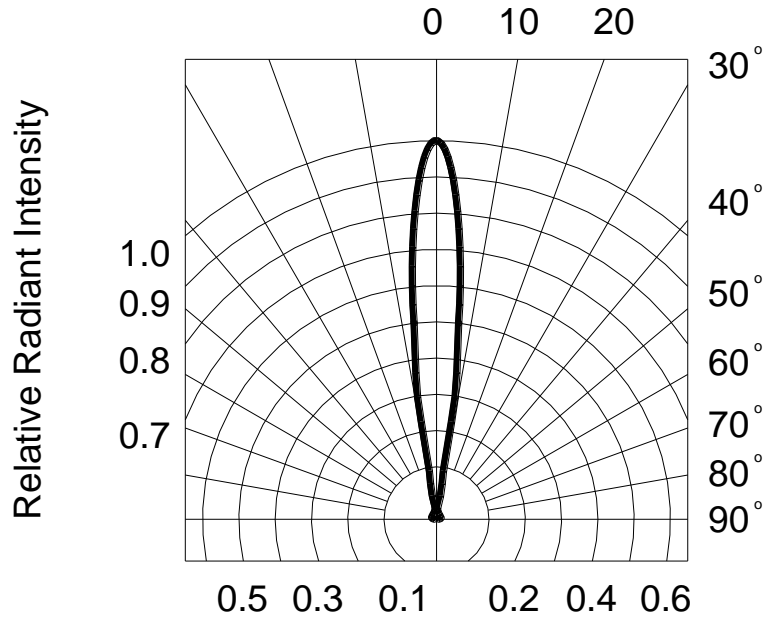


FIG.7 RADIATION DIAGRAM



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Infrared Emitters](#) category:*

*Click to view products by [Lite-On](#) manufacturer:*

Other Similar products are found below :

[LTE-309](#) [LTE-3279K](#) [LTE-4206C](#) [LTE-4208C](#) [EAILP03RDAA6](#) [LTE-2871C](#) [LTE-4238](#) [ASDL-4264-C22](#) [OED-EL305F4C50-HT](#) [OP216-004](#) [LTE-3376](#) [EEL109](#) [HL-PST-1608IR1C-L4](#) [SFH 7016](#) [IN-S126ETIR](#) [IN-S126DSHIR](#) [IN-S126ETHIR](#) [IN-P32ZTHIR](#) [IN-S42CTQHIR](#) [IN-S126BTHIR](#) [IN-S63DTHIR](#) [IN-S85BTHIR](#) [IN-S63FTHIR](#) [EAIST3535A1](#) [EAIST3535A4](#) [MHT153IRCT](#) [MHS153IRCT](#) [HIR204C/H0](#) [HIR323C](#) [LTE-209](#) [HSDL-4400#011](#) [IR12-21C/TR8](#) [IR17-21C/TR8](#) [IR26-21C/L110/TR8](#) [IR91-21C/TR10](#) [KM-4457F3C](#) [L-53F3BT](#) [WP3A10F3C](#) [LTE-4208](#) [IR42-21C/TR8](#) [HSDL-4261](#) [APA3010F3C-GX](#) [SE2460-140](#) [OP266-905](#) [OP280D](#) [LTE-2871](#) [HIR8323/C16](#) [KP-2012SF4C](#) [KPA-3010F3C](#) [L-7113SF6C](#)