



**Photocoupler**  
**Product Data Sheet**  
LTV-1213

Spec No. :DS70-2019-0047  
Effective Date: 05/10/2019  
Revision: -

**LITE-ON DCC**

**RELEASE**

**BNS-OD-FC001/A4**



## Photocoupler LTV-02X3 series LTV-12X3 series

### 1. DESCRIPTION

Solid State Relays (SSR) are integration of an AlGaAs Light Emitting Diode, a Phototriac Detector and a main power Triac. These devices are ideally suited for controlling high voltage AC loads with solid state reliability while providing 5 KV isolation ( $V_{iso}(rms)$ ) between input to output.

#### 1.1 Features

- 8 pin DIP package
- High repetitive peak off-state voltage  $V_{DRM}$  : Min. 600 V
- Isolation voltage between input and output  $V_{iso}$  : 5,000  $V_{rms}$
- Safety approval  
VDE DIN EN 60747-5-5 / IEC 60747-5-5  
UL 1577 (E113898)  
UL 508 (E490256)  
CUL CA5A (E113898)  
CQC GB4943.1-2011/GB8898-2011 (meet Altitude up to 5000m)  
DEMKO IEC/EN62368-1; IEC/EN 60950-1; IEC/EN 60065
- RoHS Compliance  
All materials be used in device are followed EU RoHS directive (No.2002/95/EC)

Part Number	Output Rating			Functional Diagram
	Peak Off-state Voltage	On-state RMS Current	Type	
LTV-0213	600 V	0.3 A	Zero-Crossing	
LTV-1213		0.6 A		
LTV-0223		0.3 A	Random Phase	
LTV-1223		0.6 A		

#### 1.2 Applications




- Home appliances
- Industrial equipment

## Photocoupler LTV-02X3 series LTV-12X3 series

### 2. PACKAGE DIMENSIONS




#### 2.1 Through Hole

##### LTV-X2X3

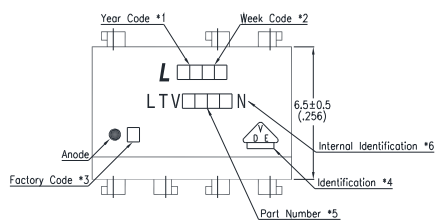




#### 2.2 Wide Lead

##### LTV-X2X3M

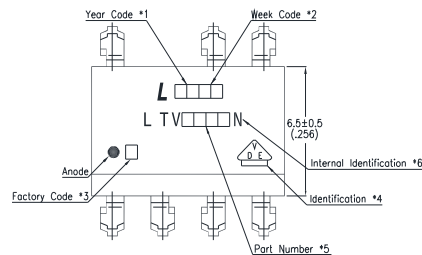

#### 2.3 SMT

##### LTV-X2X3S

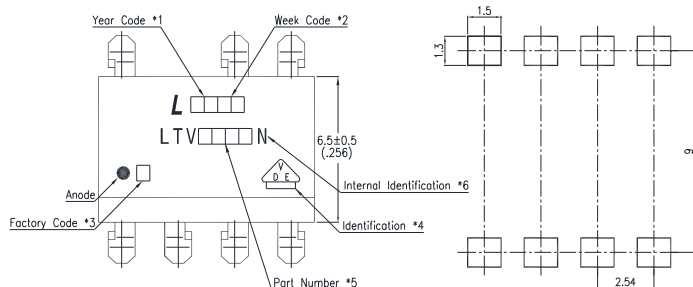

#### Notes:

- 2-digit year code
- 2-digit work week code
- Factory identification mark shall be marked (W: China-CZ, Y: Thailand)
- VDE option
- Part number (LTV0213, LTV0223, LTV1213, LTV1223)
- N: Internal identification


Dimensions in millimeters (inches)

## Photocoupler LTV-02X3 series LTV-12X3 series

### 3. TAPING DIMENSIONS


#### 3.1 LTV-02X3S-TA

#### LTV-12X3S-TA

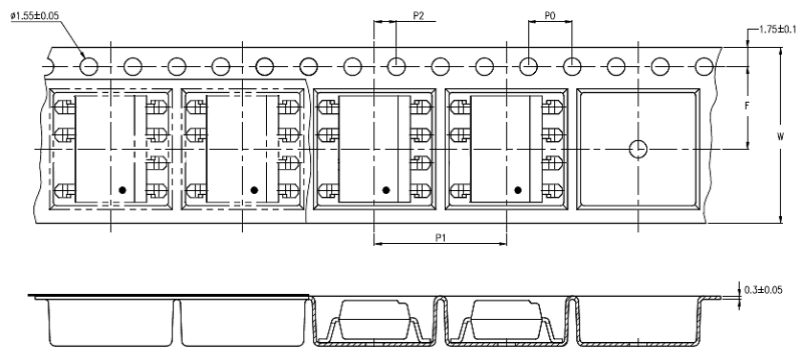

#### 3.2 LTV-02X3S-TA1

#### LTV-12X3S-TA1

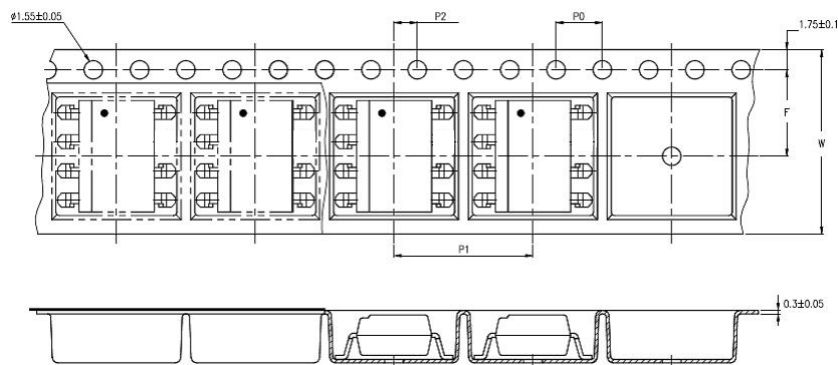

Description	Symbol	Dimension in mm (inch)
Tape wide	W	$16 \pm 0.3$ (0.63)
Pitch of sprocket holes	$P_0$	$4 \pm 0.1$ (0.15)
Distance of compartment	F	$7.5 \pm 0.1$ (0.295)
	$P_2$	$2 \pm 0.1$ (0.079)
Distance of compartment to compartment	$P_1$	$12 \pm 0.1$ (0.47)

#### 3.3 Quantities Per Reel

Package Type	LTV-02X3 series LTV-12X3 series
Quantities (pcs)	1000

## Photocoupler LTV-02X3 series LTV-12X3 series

### 4. RATING AND CHARACTERISTICS

#### 4.1 Absolute Maximum Ratings at Ta=25°C

Parameter		Symbol	Rating	Unit
Input	Forward Current	$I_F$	50	mA
	Reverse Voltage	$V_R$	6	V
	Peak Forward Current	$I_{FP}$	1	A
	Junction Temperature	$T_J$	125	°C
	Power Dissipation	$P_{in}$	140	mW
Output	Repetitive peak OFF-state voltage	$V_{DRM}$	600	V
	ON-state RMS current	LTV-0213, LTV-0223	0.3	A
		LTV-1213, LTV-1223	0.6	
	Non-repetitive Surge current *3	LTV-0213, LTV-0223	3	A
		LTV-1213, LTV-1223	6	
	Power Dissipation	$P_{out}$	1100	mW
*1.	Isolation Voltage	$V_{iso}$	5000	$V_{rms}$
	Operating Temperature	$T_{opr}$	-30 ~ +85	°C
	Storage Temperature	$T_{stg}$	-40 ~ +125	°C
*2.	Soldering Temperature	$T_{sol}$	260	°C

- AC For 1 Minute, R.H. = 40 ~ 60%  
Isolation voltage shall be measured using the following method.
  - Short between anode and cathode on the primary side and between collector and emitter on the secondary side.
  - The isolation voltage tester with zero-cross circuit shall be used.
  - The waveform of applied voltage shall be a sine wave.
- For 10 Seconds
- Sine wave; f=60Hz, 1 cycle

## Photocoupler LTV-02X3 series LTV-12X3 series

### 4.2 ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C

		Symbol	Min.	Typ.	Max.	Unit	Test Condition
Input	Forward Voltage	$V_F$	—	1.2	1.3	V	$I_F=20\text{mA}$
	Reverse Current	$I_R$	—	—	10	$\mu\text{A}$	$V_R=6\text{V}$
Output	Peak Blocking Current, Either Direction	$I_{DRM}$	—	—	100	$\mu\text{A}$	$I_F=0\text{mA}$ $V_{DRM} = 600\text{V}$
	Peak On-State Voltage, Either Direction	$V_{TM}$	—	—	2.5	V	$I_F = 10\text{mA}$ $I_{TM} = \text{Max.}$
	Critical rate of Rise of Off-State Voltage	$dv/dt$	200	—	—	$\text{V}/\mu\text{s}$	$V_{DRM} = 600\text{V} \cdot 1/\sqrt{2}$
Transfer characteristics	Led Trigger Current, Current Required to Latch Output, Either Direction	$I_{FT}$	—	—	10	mA	$V_D = 6\text{V}$ $R_L = 100\ \Omega$
	Holding Current, Either Direction	$I_H$	—	—	25	mA	
	Zero Crossing Voltage (LTV-X213 Series)	$V_{ZC}$	—	—	50	V	$I_F = 10\text{mA}$
	Turn on time	$T_{ON}$	—	—	100	$\mu\text{s}$	$I_F = 20\text{mA}$ $V_D = 6\text{V}$ $R_L = 100\ \Omega$
	I/O isolation resistance	$R_{ISO}$	$5 \times 10^{10}$	$10^{11}$	—	$\Omega$	500V DC

### 5. CHARACTERISTICS CURVES (TYPICAL PERFORMACNE) AND TESTING DIAGRAM

Fig 1. ON-state RMS current vs.  
Ambient Temperature

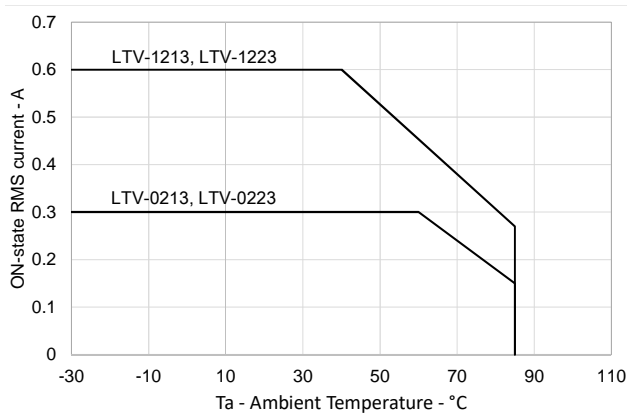


Fig 2. Peak ON-state voltage vs.  
Ambient Temperature

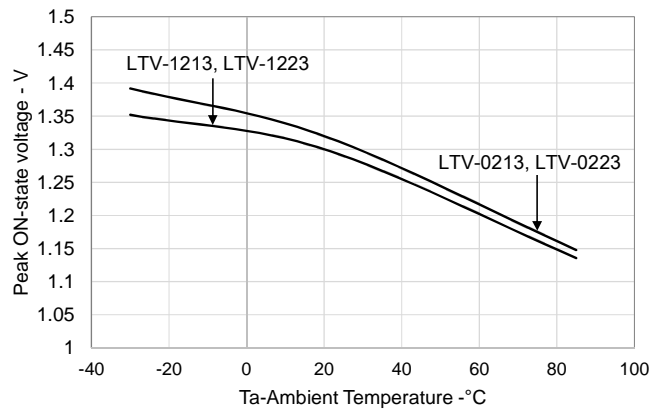


Fig 3. Trigger LED current vs.  
Ambient Temperature


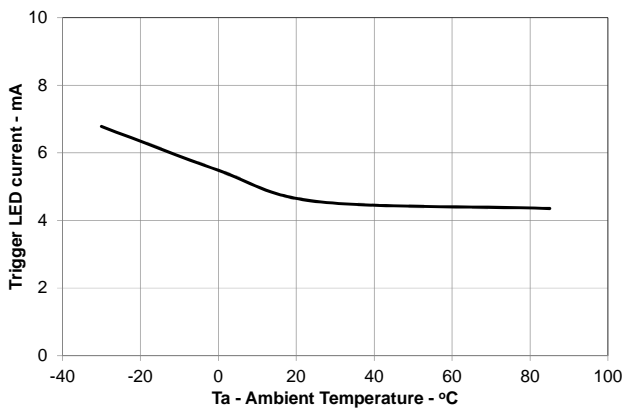


Fig 4. LED dropout voltage vs.  
Ambient Temperature

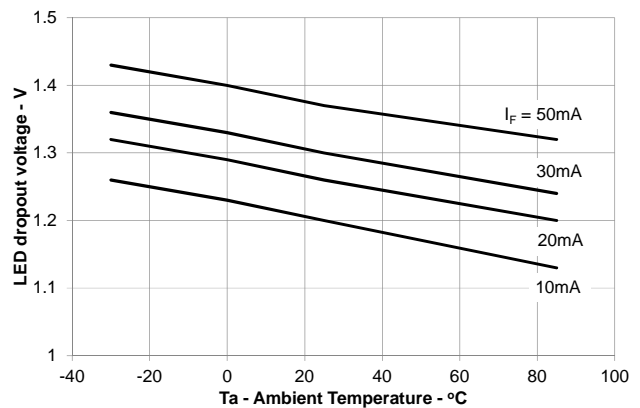

## Photocoupler LTV-02X3 series LTV-12X3 series

Fig 5. Turn on time vs. LED current

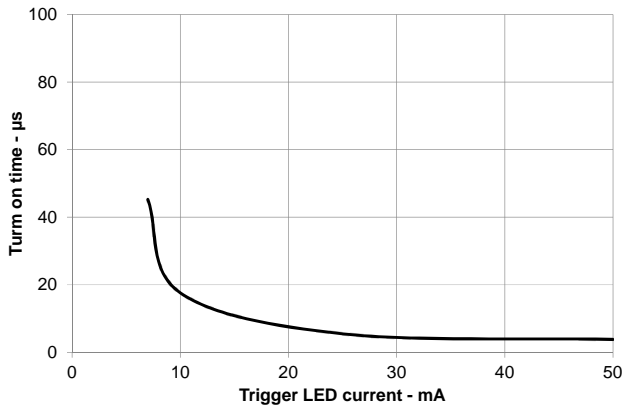


Fig 6. Repetitive peak OFF-state current vs. Load voltage

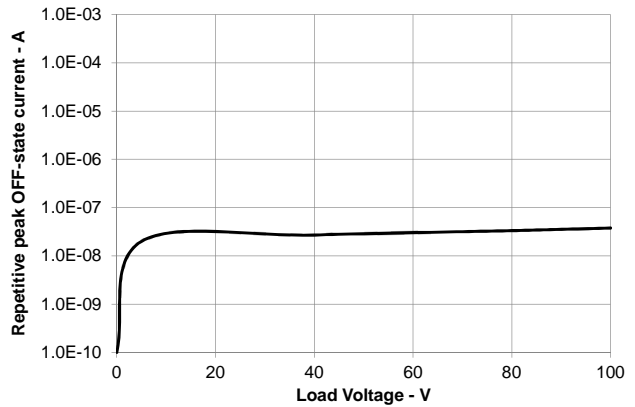


Fig 7. Hold current vs. Ambient Temperature

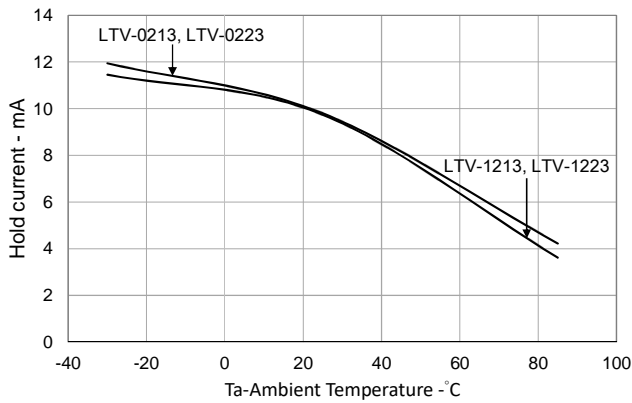


Fig.8 Testing diagram of Turn on time


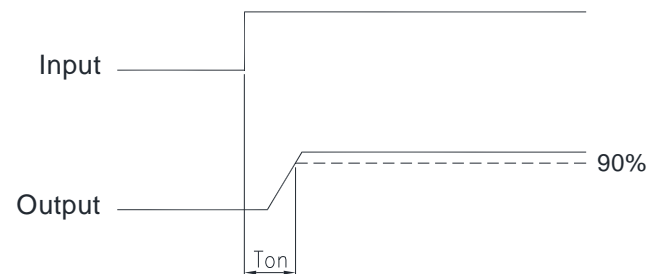


Fig 9. Basic diagrams



RC: Snubber circuit

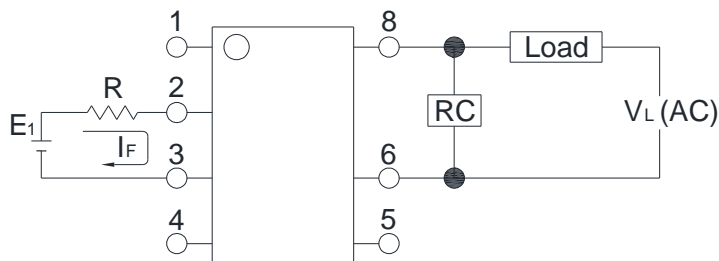


## Photocoupler LTV-02X3 series LTV-12X3 series

### 6. TEMPERATURE PROFILE OF SOLDERING

#### 6.1 IR Reflow soldering (JEDEC-STD-020C compliant)

One time soldering reflow is recommended within the condition of temperature and time profile shown below. Do not solder more than twice.

Profile item	Conditions
Preheat	
- Temperature Min ( $T_{Smin}$ )	150°C
- Temperature Max ( $T_{Smax}$ )	200°C
- Time (min to max) (ts)	90±30 sec
Soldering zone	
- Temperature ( $T_L$ )	217°C
- Time ( $t_L$ )	60 sec
Peak Temperature ( $T_P$ )	260°C
Ramp-up rate	3°C / sec max.
Ramp-down rate	3~6°C / sec

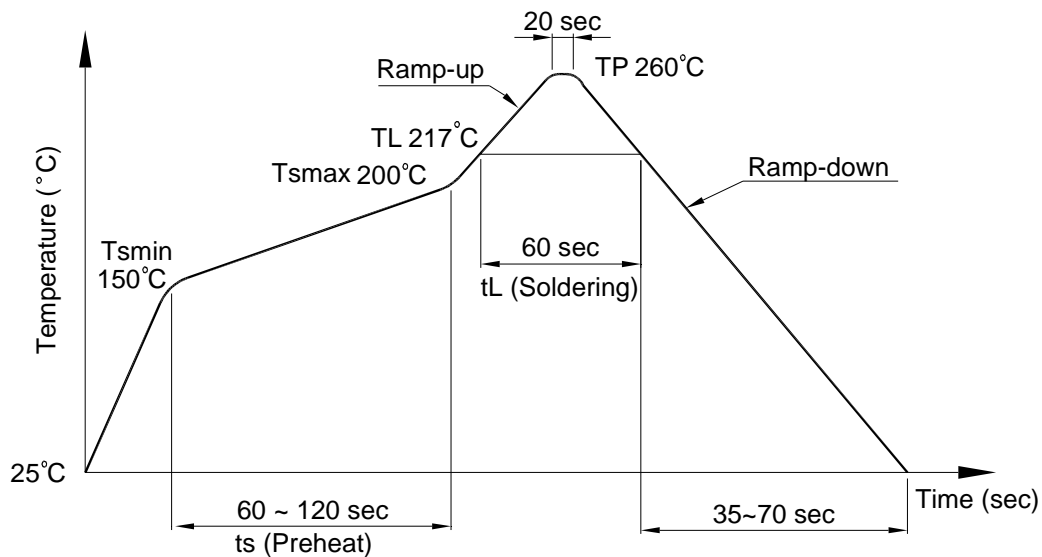

## Photocoupler LTV-02X3 series LTV-12X3 series

### 6.2 Wave soldering (JEDEC22A111 compliant)


One time soldering is recommended within the condition of temperature.

Temperature:  $260 \pm 0 / -5^{\circ}\text{C}$

Time: 10 sec.

Preheat temperature: 25 to  $140^{\circ}\text{C}$

Preheat time: 30 to 80 sec.

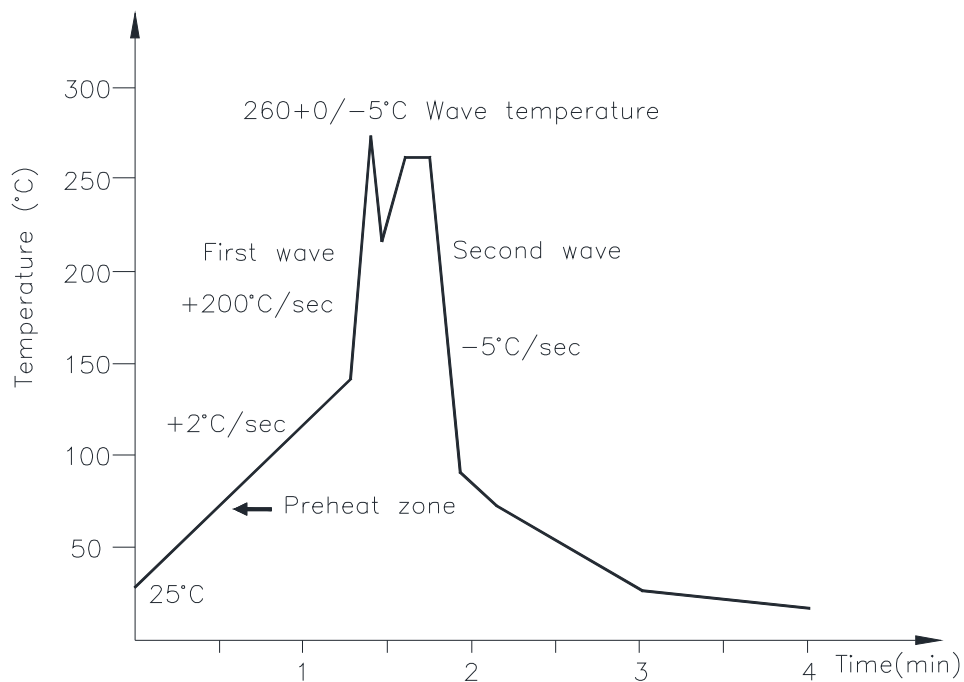



### 6.3 Hand soldering by soldering iron

Allow single lead soldering in every single process. One time soldering is recommended.

Temperature:  $380 \pm 0 / -5^{\circ}\text{C}$

Time: 3 sec max.

## 7. NAMING RULE

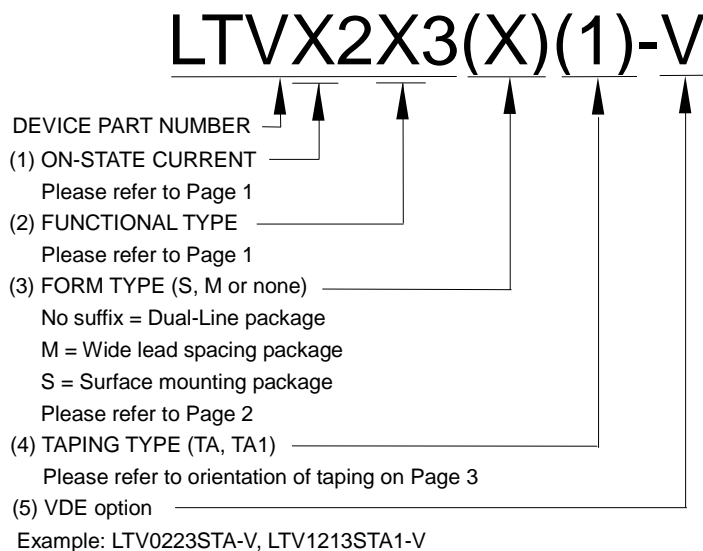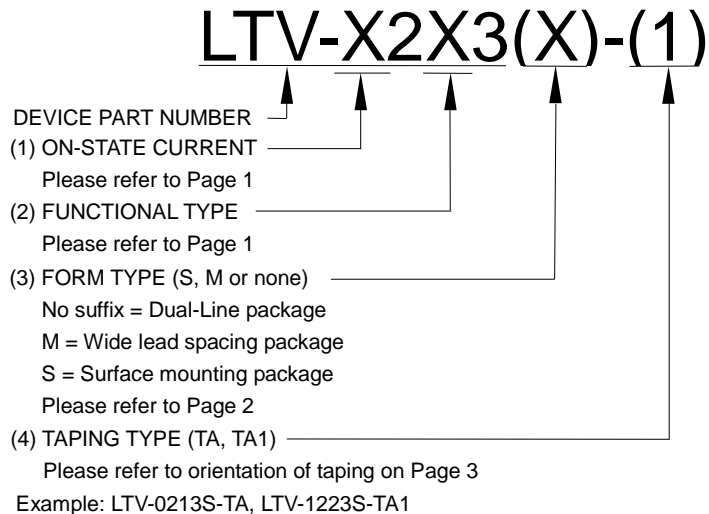

## 8. NOTES

1. LiteOn is continually improving the quality, reliability, function or design and LiteOn reserves the right to make changes without further notices.
2. The products shown in this publication are designed for the general use in electronic applications such as office automation equipment, communications devices, audio/visual equipment, electrical application and instrumentation.
3. For equipment/devices where high reliability or safety is required, such as space applications, nuclear power control equipment, medical equipment, etc, please contact our sales representatives.
4. When requiring a device for any "specific" application, please contact our sales in advice.
5. If there are any questions about the contents of this publication, please contact us at your convenience.
6. The contents described herein are subject to change without prior notice.
7. Immerge unit's body in solder paste is not recommended.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Solid State Relays - Industrial Mount](#) category:*

*Click to view products by [Lite-On](#) manufacturer:*

Other Similar products are found below :

[D2440-C](#) [H10CA4890](#) [D4875C](#) [1395831-1](#) [1616010-6](#) [BR312BY](#) [A-1326](#) [H10CA4850](#) [H12CA4890VL](#) [RA2410-D06](#) [RA2410HA06T](#)  
[D1202F](#) [W230E-1-12](#) [W230T-3-12](#) [1-1617030-3](#) [1-1617033-7](#) [MS2-D2420](#) [MS2-D2430](#) [A-1440](#) [RJ1P60V50E](#) [RN1F48I50](#) [70.362.1028.0](#)  
[Z5.509.0828.0](#) [2912138](#) [SSRDAC10](#) [RV8S-L-A240-D24](#) [RV8S-S-A240Z-D24](#) [RN1F12V50](#) [RJ1P60I30E](#) [RJ1P60V30E](#) [PLC-OPT-](#)  
[12DC/300DC/1](#) [SO967860](#) [SMT8628521](#) [SO869970](#) [SOD867180](#) [ABL-L01PA-NN](#) [ESUC0480](#) [SRH3-2415](#) [SUL942460](#) [G3PH-5150B](#)  
[DC5-24](#) [G3PH-2075B](#) [DC5-24](#) [RV8S-L-D48-D6](#) [1127410000](#) [SSP1D425BDT](#) [1127700000](#) [SSLM1ND101M7](#) [8950780000](#) [G3PH-](#)  
[5150BAC100-240](#) [1548740-1](#) [84154010N](#)