



Photocoupler
Product Data Sheet
LTV816STP-D3-TXCU

Spec No. :DS70-2018-0096
Effective Date: 07/06/2018
Revision: -

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4

Photocouplers LTV816-D3-TXCU series

1. DESCRIPTION

1.1 Features

- Current transfer ratio 1 (CTR 1 : 200 to 500% at IF = 2mA, VCE = 5V, Ta=25oC)
- Current transfer ratio 2 (CTR 2 : 300 to 450% at IF = 5mA, VCE = 5V, Ta=25oC)
- High input-output isolation voltage (Viso = 5,000Vrms)
- Response time (tr : TYP. 4μs at VCE = 2V, IC = 2mA, RL = 100Ω)
- Dual-in-line package : LTV816-CU : 1-channel type
- Wide lead spacing package : LTV816M-CU : 1-channel type
- Surface mounting package : LTV816S-CU : 1-channel type
- Tape and reel packaging :
 - LTV816STA-CU : 1-channel type
 - LTV816STA1-CU : 1-channel type
 - LTV816STP-CU : 1-channel type
- Safety approval
 - UL 1577
 - VDE DIN EN60747-5-5 (VDE 0884-5)
 - CSA CA5A
 - CQC GB4943.1-2011/ GB8898-2011 (meet Altitude up to 5000m)
 - Nordic Safety (FIMKO/NEMKO/SEMKO/DEMKO)
- BSI RoHS Compliance
 - All materials be used in device are followed EU RoHS directive (No.2002/95/EC).
- ESD pass HBM 8000V/MM2000V
- MSL class1
- Copper base lead frame


1.2 Applications

- Hybrid substrates that require high density mounting.
- Programmable controllers


Photocouplers LTV816-D3-TXCU series

2. PACKAGE DIMENSIONS

2.1 LTV816-TXCU series

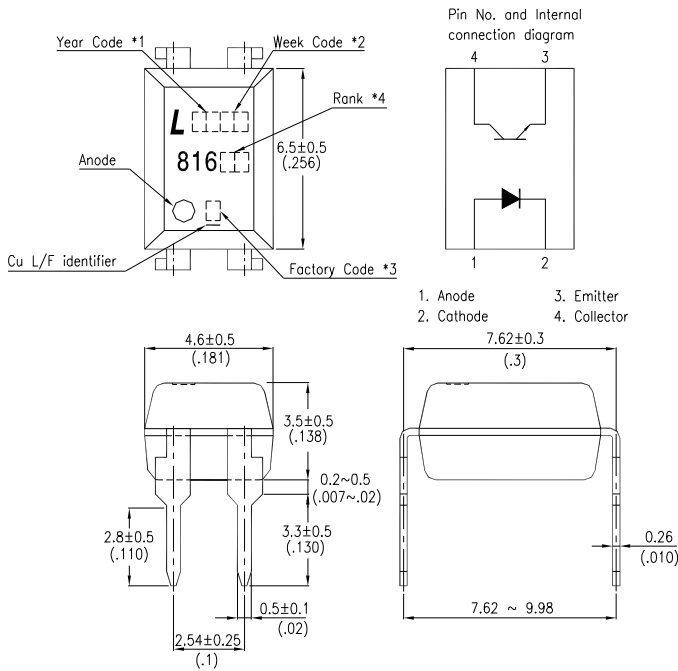

2.2 LTV816M-TXCU series

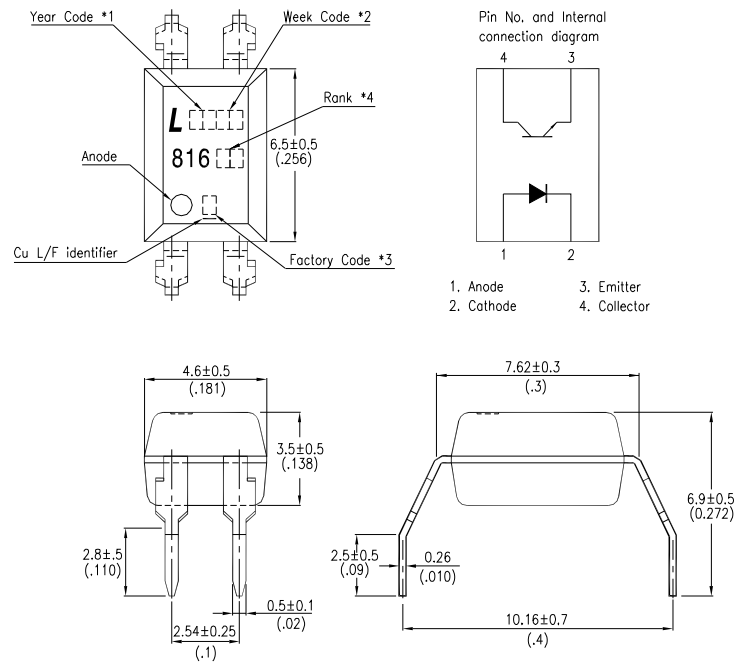


Notes :

1. Year date code.
2. 2-digit work week.
3. Factory identification mark shall be marked (W: China-CZ, Y: Thailand, Z: Taiwan)
4. Rank shall be marked "D3".

Photocouplers LTV816-D3-TXCU series

2.3 LTV816S-TXCU series:

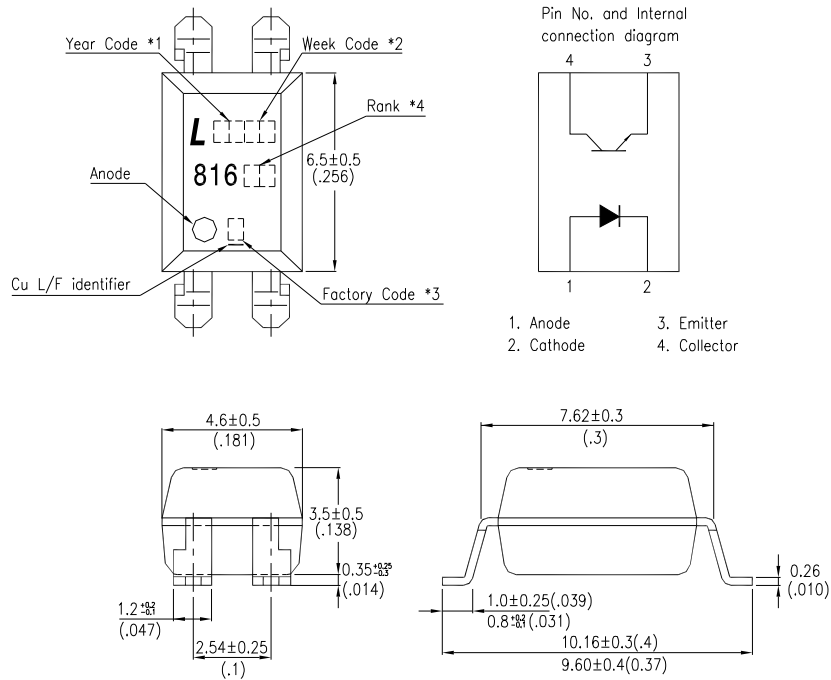

Notes :


1. Year date code.
2. 2-digit work week.
3. Factory identification mark shall be marked (W: China-CZ, Y: Thailand, Z: Taiwan)
4. Rank shall be marked "D3".

*Lead span distance : 9.60 ± 0.4 mm, foot distance : $0.8 \pm 0.2 / -0.1$ mm for Taiwan manufacture only.


Photocouplers LTV816-D3-TXCU series

3. TAPING DIMENSIONS

3.1 TA

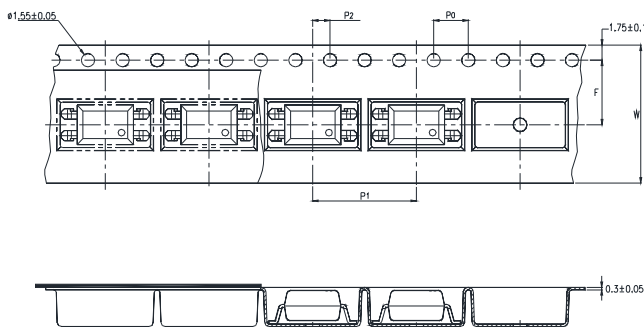

3.2 TA1

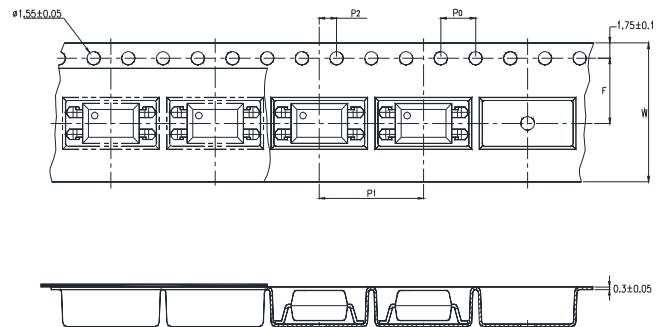


Description	Symbol	Dimension in mm (inch)
Tape wide	W	16±0.3 (0.63)
Pitch of sprocket holes	P ₀	4±0.1 (0.15)
Distance of compartment	F	7.5±0.1 (0.295)
	P ₂	2±0.1 (0.079)
Distance of compartment to compartment	P ₁	12±0.1 (0.472)

3.3 Quantities Per Reel

Package Type	TA/TA1
Quantities (pcs)	1000

**Photocouplers
LTV816-D3-TXCU series**

3.4 TP

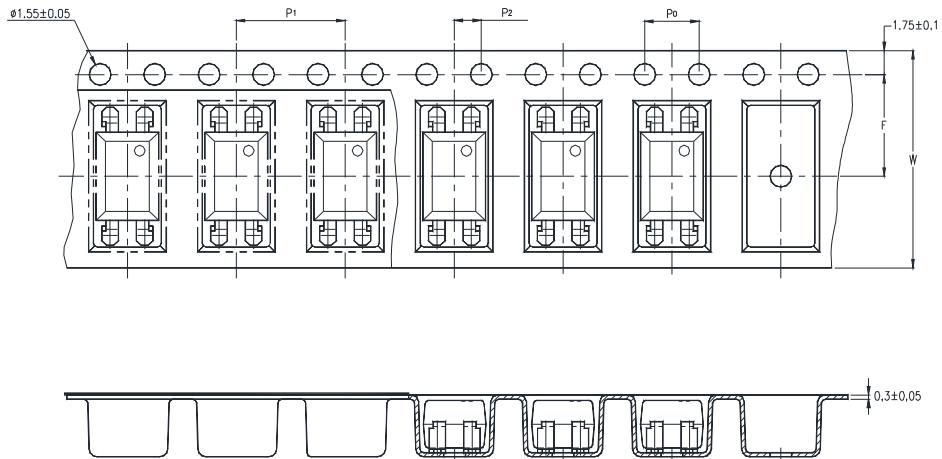

Description	Symbol	Dimension in mm (inch)
Tape wide	W	16±0.3 (0.63)
Pitch of sprocket holes	P ₀	4±0.1 (0.15)
Distance of compartment	F	7.5±0.1 (0.295)
	P ₂	2±0.1 (0.079)
Distance of compartment to compartment	P ₁	8±0.1 (0.472)

3.5 Quantities Per Reel

Package Type	TP
Quantities (pcs)	2000

Photocouplers LTV816-D3-TXCU series

4. RATING AND CHARACTERISTICS

4.1 Absolute Maximum Ratings at Ta=25°C

	Parameter	Symbol	Rating	Unit
Input	Forward Current	I_F	50	mA
	Reverse Voltage	V_R	6	V
	Power Dissipation	P	70	mW
Output	Collector - Emitter Voltage	V_{CEO}	80	V
	Emitter - Collector Voltage	V_{ECO}	7	V
	Collector Current	I_C	50	mA
	Collector Power Dissipation	P_C	150	mW
	Total Power Dissipation	P_{tot}	200	mW
1.	Isolation Voltage	V_{iso}	5000	V_{rms}
2.	Isolation Voltage(Dipping in oil)	V_{iso}	10000	V_{rms}
	Operating Temperature	T_{opr}	-55 ~ +110	°C
	Storage Temperature	T_{stg}	-55 ~ +125	°C
3.	Soldering Temperature	T_{sol}	260	°C

1. AC For 1 Minute, R.H. = 40 ~ 60%

Isolation voltage shall be measured using the following method.

- (1) Short between anode and cathode on the primary side and between collector and emitter on the secondary side.
- (2) The isolation voltage tester with zero-cross circuit shall be used.
- (3) The waveform of applied voltage shall be a sine wave.
- (4) Leakage current $\leq 0.5\text{mA}$, Exterior don't damage.

2. AC 10kV / 1min., Leakage current $\leq 0.5\text{mA}$, Exterior don't damage

3. For 10 Seconds

Photocouplers LTV816-D3-TXCU series

4.2 ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C

Parameter		Symbol	Min.	Typ.	Max.	Unit	Test Condition
Input	Forward Voltage	V_F	1.0	1.2	1.3	V	$I_F=10\text{mA}$
	Reverse Current	I_R	—	—	10	μA	$V_R=5\text{V}$
	Terminal Capacitance	C_T	—	30	250	pF	$V=0, f=1\text{KHz}$
Output	Collector Dark Current	I_{CEO1}	—	—	0.02	μA	$V_{CE}=5\text{V}, I_F=0$ $T_a=25^\circ\text{C}$
		I_{CEO2}	—	—	0.1	μA	$V_{CE}=24\text{V}, I_F=0$ $T_a=25^\circ\text{C}$
		I_{CEO3}	—	—	5	μA	$V_{CE}=5\text{V}, I_F=0$ $T_a=85^\circ\text{C}$
		I_{CEO4}	—	—	50	μA	$V_{CE}=24\text{V}, I_F=0$ $T_a=85^\circ\text{C}$
	Collector-Emitter Breakdown Voltage	BV_{CEO}	80	—	—	V	$I_C=0.1\text{mA}, I_F=0$
	Emitter-Collector Breakdown Voltage	BV_{ECO}	7	—	—	V	$I_E=0.1\text{mA}, I_F=0$
	1 Current Transfer Ratio	CTR1	200	—	500	%	$I_F=2\text{mA}, V_{CE}=5\text{V}$
		CTR2	300	—	450	%	$I_F=5\text{mA}, V_{CE}=5\text{V}$
	Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	—	—	0.4	V	$I_F=1\text{mA}, I_C=1\text{mA}$
	Isolation Resistance	R_{iso}	1×10^{12}	—	—	Ω	DC500V, 40 ~ 60% R.H.
	Floating Capacitance	C_f	—	0.6	1	pF	$V=0, f=1\text{MHz}$
	Cut-off Frequency	f_c	—	80	—	kHz	$V_{CE}=5\text{V}, I_C=2\text{mA}$ $R_L=100\Omega, -3\text{dB}$
	Response Time (Rise)	t_r	—	—	12	μs	$V_{CC}=10\text{V},$ $I_C=2\text{mA}$ $R_L=100\Omega,$
	Response Time (Fall)	t_f	—	—	12	μs	
Response Time (On)	t_{ON}	—	—	12	μs		
Response Time (Off)	t_{OFF}	—	—	12	μs		

$$1. \text{CTR} = \frac{I_C}{I_F} \times 100\%$$

Photocouplers LTV816-D3-TXCU series

5. CHARACTERISTICS CURVES

Fig.1 Forward Current vs. Ambient Temperature

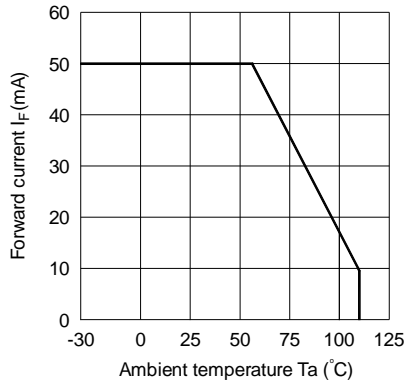


Fig.2 Collector Power Dissipation vs. Ambient Temperature

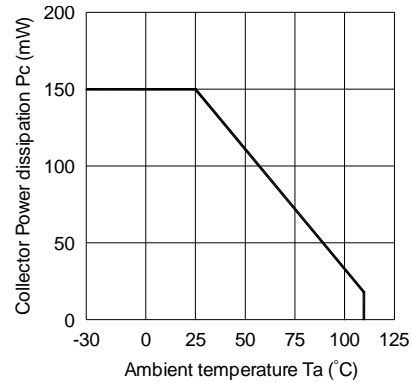


Fig.3 Collector-emitter Saturation Voltage vs. Forward Current

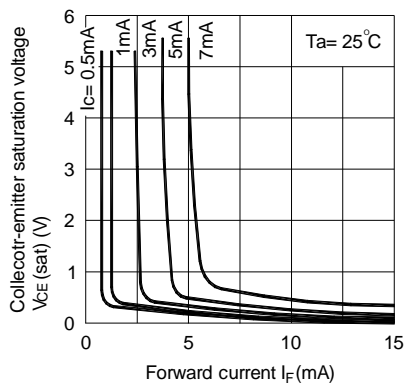


Fig.4 Forward Current vs. Forward Voltage

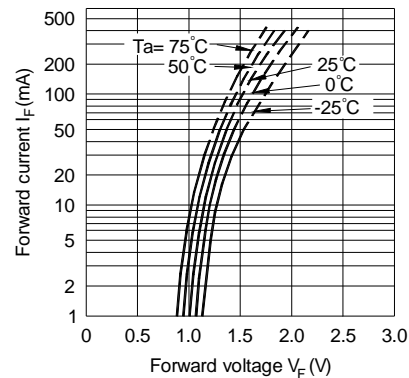


Fig.5 Current Transfer Ratio vs. Forward Current


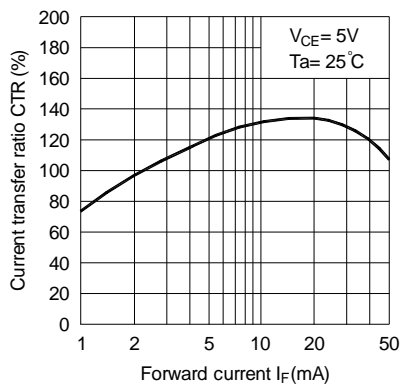


Fig.6 Collector Current vs. Collector-emitter Voltage

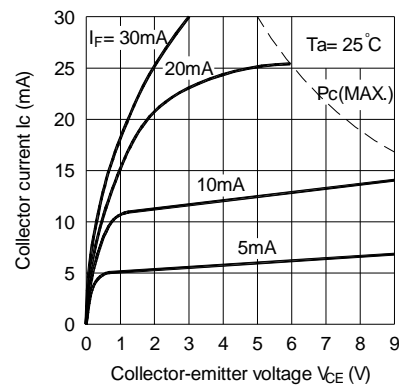

Photocouplers LTV816-D3-TXCU series

Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature

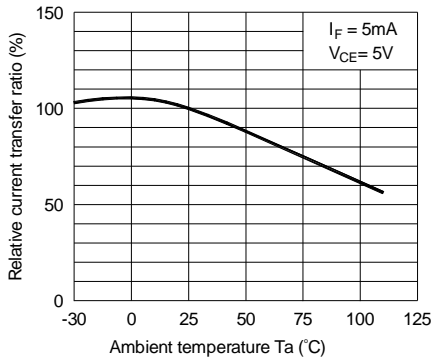


Fig.8 Collector-emitter Saturation Voltage vs. Ambient Temperature

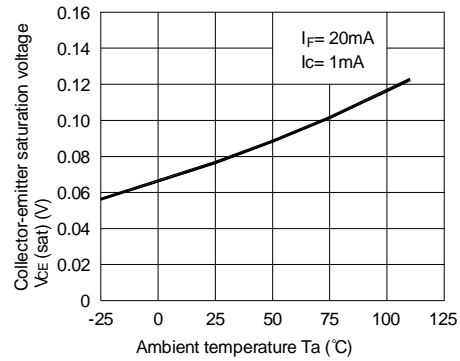


Fig.9 Collector Dark Current vs. Ambient Temperature

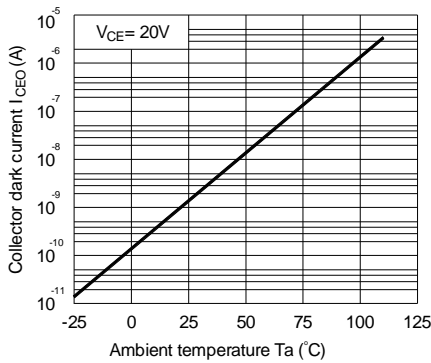


Fig.10 Response Time vs. Load Resistance



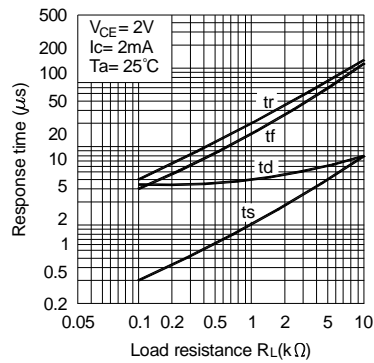



Fig.11 Frequency Response

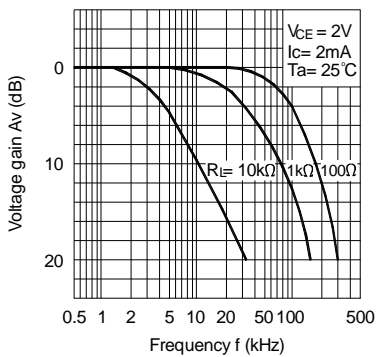

Test Circuit for Response Time

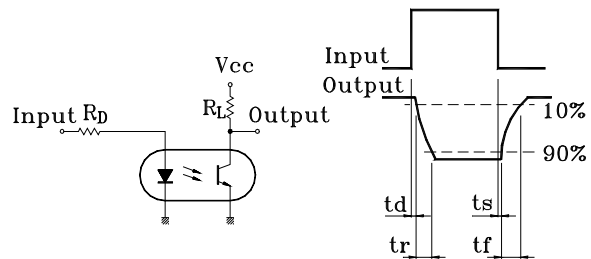

Test Circuit for Frequency Response

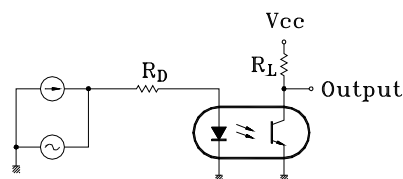


Photocouplers LTV816-D3-TXCU series

6. TEMPERATURE PROFILE OF SOLDERING

6.1 IR Reflow soldering (JEDEC-STD-020C compliant)

One time soldering reflow is recommended within the condition of temperature and time profile shown below. Do not solder more than three times.

Profile item	Conditions
Preheat	
- Temperature Min (T_{Smin})	150°C
- Temperature Max (T_{Smax})	200°C
- Time (min to max) (ts)	90±30 sec
Soldering zone	
- Temperature (T_L)	217°C
- Time (t_L)	60 ~ 100 sec
Peak Temperature (T_P)	260°C
Ramp-up rate	3°C / sec max.
Ramp-down rate	3~6°C / sec

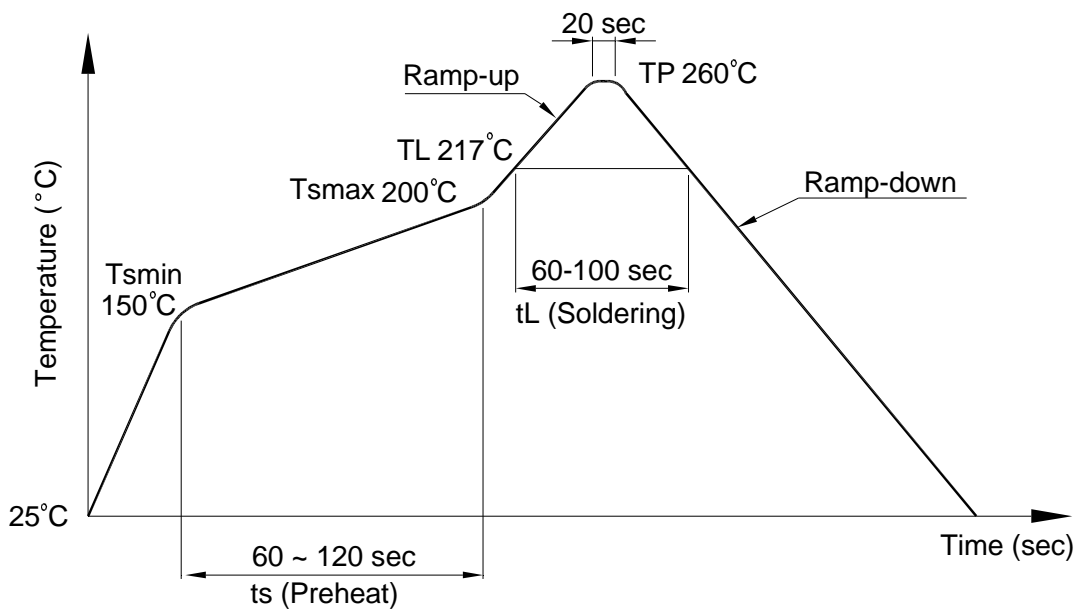

Photocouplers LTV816-D3-TXCU series

6.2 Wave soldering (JEDEC22A111 compliant)


One time soldering is recommended within the condition of temperature.

Temperature: $260+0/-5^{\circ}\text{C}$

Time: 10 sec.

Preheat temperature: 25 to 140°C

Preheat time: 30 to 80 sec.

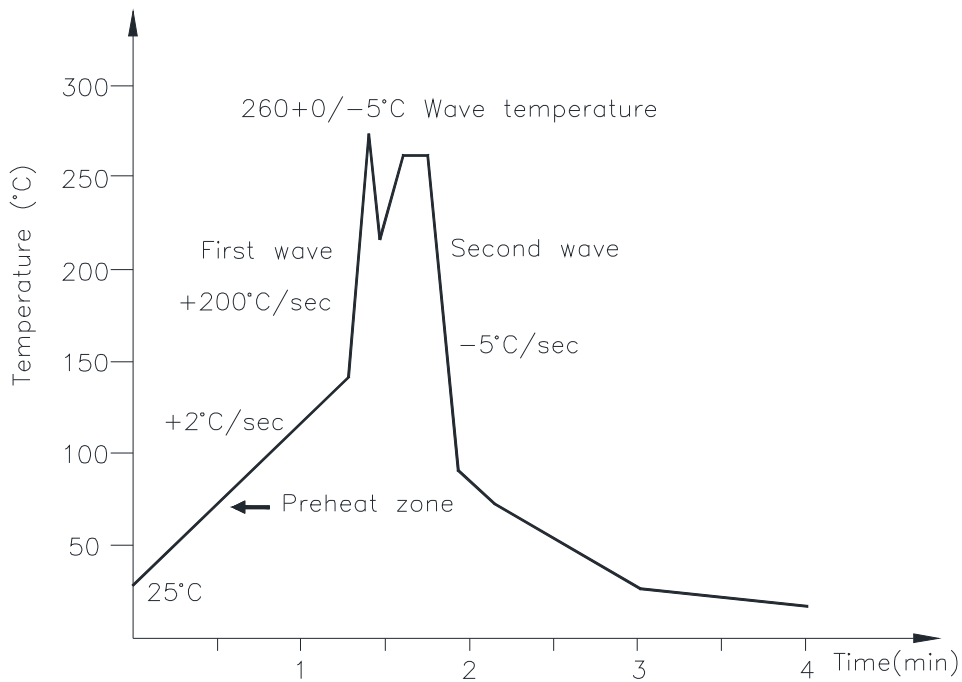

6.3 Hand soldering by soldering iron

Allow single lead soldering in every single process. One time soldering is recommended.


Temperature: $380+0/-5^{\circ}\text{C}$

Time: 3 sec max.

**Photocouplers
LTV816-D3-TXCU series**

7. RRECOMMENDED FOOT PRINT PATTERNS (MOUNT PAD)

Unit: mm

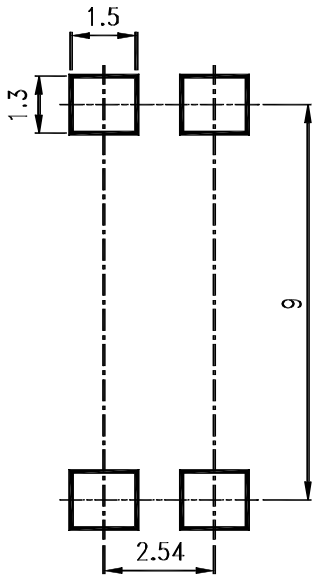

8. NAMING RULE

LTV 816(1) (2)-(3)-TXCU

DEVICE PART NUMBER

(1) No suffix = Dual-in-Line package

M = Wide lead spacing package

S = Surface mounting package

(2) TAPING TYPE(TA,TA1,TP or none)

Please refer to orientation of taping on Page P4-P5

(3) CTR RANK (D3)

(4) Customer code

Example : LTV816STA1-D3-TXCU

Photocouplers LTV816-D3-TXCU series

9. Notes:

- LiteOn is continually improving the quality, reliability, function or design and LiteOn reserves the right to make changes without further notices.
- The products shown in this publication are designed for the general use in electronic applications such as office automation equipment, communications devices, audio/visual equipment, electrical application and instrumentation.
- For equipment/devices where high reliability or safety is required, such as space applications, nuclear power control equipment, medical equipment, etc, please contact our sales representatives.
- When requiring a device for any "specific" application, please contact our sales in advice.
- If there are any questions about the contents of this publication, please contact us at your convenience.
- The contents described herein are subject to change without prior notice.
- Immerge unit's body in solder paste is not recommended.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Triac & SCR Output Optocouplers](#) category:

Click to view products by [Lite-On](#) manufacturer:

Other Similar products are found below :

[IL4218-X019](#) [MOC3063S-TA](#) [IL410-X019T](#) [ILD207-X001T](#) [ILD615-1X007T](#) [WPPCT-N1066A](#) [WPPCT-N1566A](#) [WPPCT-Z546D](#)
[TLP3052](#) [VO2223A-X007T](#) [WPPCT-Z546A](#) [WPPCT-Z1046D](#) [WPPCT-Z1046A](#) [WPPCT-N566D](#) [WPPCT-N566A](#) [WPPCT-N1566D](#)
[FODM3053V_NF098](#) [VO4258D](#) [VO4256D](#) [VO4158H-X017T](#) [IL4116-X009T](#) [MOC3071SM](#) [IL410-X017](#) [IL4116-X007](#) [VO0601-X001T](#)
[MOC3073SR2M](#) [LTV-3053](#) [EL3021S1\(TA\)](#) [ELR2223](#) [ELM3053\(TA\)](#) [ELM3052\(TA\)](#) [EL3083S1\(TA\)-V](#) [EL3052S1\(TA\)\(P5\)-V](#)
[LTV816STP-D3-TXCU](#) [TLP265J\(TPL,E](#) [TLP265J\(TPR,E\(T](#) [MOC3063SM](#) [MOC3061M](#) [MOC3043SM](#) [MOC3052STA1-V](#) [EL3061S\(TA\)](#)
[MOC3023D](#) [MOC3022D](#) [MOC3061D](#) [MOC3021D](#) [MOC3051D](#) [MOC3083D](#) [MOC3042D](#) [MOC3082D](#) [MOC3020D](#)